




Contractor PUMPS

S P E C I F I C A T I O N S




Contractor Pump Flow Rates*

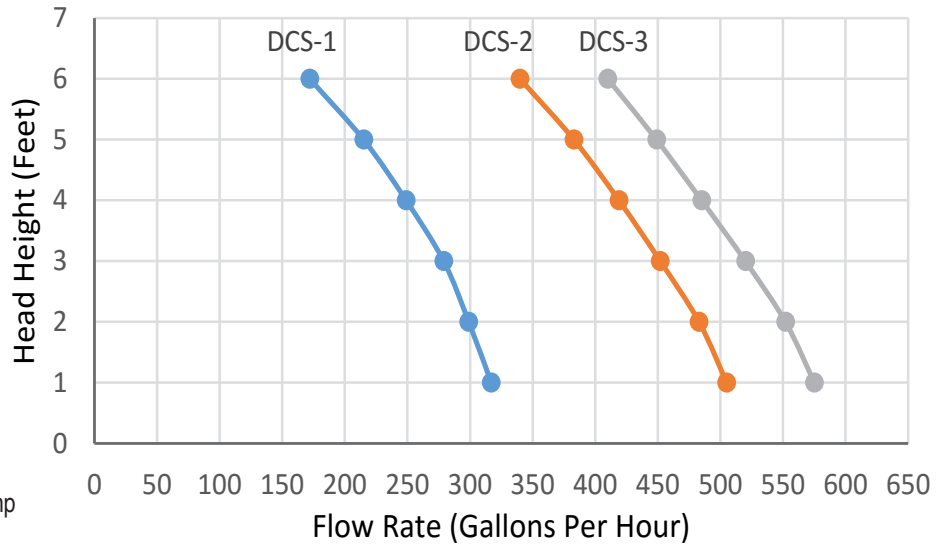

UL Recognized Component and UL Classified Retrofit Pump

- Flame Retardant Motor Housing
- Auto Reset Thermal Overload
- 3 Prong Grounded Power Cord
- Shock Resistant Motor Housing
- Long Life Technology Bearing and Shaft
- Low Level / Low Recovery
- 1/2" To 4" Water Reservoir Depths
- Elbow Extension w/ Elevated Bleed Port
- Built-in Barbed Elbow
- Screened Water Inlet
- Fits All Coolers
- UL Classified

RESIDENTIAL / COMMERCIAL / INDUSTRIAL



Concentric 115V



Concentric 230V

Part Number	Model	Rated	HP	Amps	Ctn. Qty.	Ctn. Wt.	Pump Outlet	Extender Outlet	Power Cord (ft.)
1016	DCS - 1 115 Volt	Up to 8,500 CFM	1/60	0.9	12	31.0	1/2" and 5/8" Hose	1/2" and 5/8" Hose	4.5
1023	DCS - 2 115 Volt	8,500 to 15,000 CFM	1/40	1.2	6	21.3	5/8" and 3/4" Hose	1/2", 5/8" & 3/4" Hose	6.0
1400	DCS - 3 115 Volt	15,000 to 25,000 CFM	1/30	1.7	6	19.3	5/8" and 3/4" Hose	5/8" and 3/4" Hose	6.0
1017	DCS - 1 230 Volt	Up to 8,500 CFM	1/60	0.5	6	16.5	1/2" and 5/8" Hose	1/2" and 5/8" Hose	6.0
1024	DCS - 2 230 Volt	8,500 to 15,000 CFM	1/40	0.8	6	22.0	5/8" and 3/4" Hose	1/2", 5/8" & 3/4" Hose	6.0
1402	DCS - 3 230 Volt	15,000 to 25,000 CFM	1/30	1.1	6	18.5	5/8" and 3/4" Hose	5/8" and 3/4" Hose	6.0

* GPH results from testing performed at Dial's engineering lab under identical conditions.

DIAL MANUFACTURING, INC.

25 South 51st Avenue • Phoenix, AZ 85043 • (602) 278-1100 • (800) 350-DIAL • Fax (602) 278-1991 • Fax (800) 370-3299

Website: www.dialmfg.com

Form 0630-1215