#### SUBMITTAL RECORD

OCENIE IN THE THE COTTE
JOB
LOCATION
SUBMITTED TO
SUBMITTAL PREPARED BY
APPROVED BY
DATE



# Submittal Form Dual Hangers

#### DESCRIPTION

When preparing to suspend HVAC equipment, ductwork or accessories, threaded anchor points are often required. Dual Hangers from Duro Dyne are one-piece anchors that feature heads that are both end-tapped and crosstapped to permit both in-line mounting and side-mounting of threaded rod systems, eye rings and more. There are two variations of Dual Hangers; one for penetrating and threading into steel and one for wood.




## **FEATURES**

- Hang Threaded Rod Horizontally or Vertically with the same hanger
- No pilot hole is needed for Dual Hangers
- All fasteners are zinc plated for corrosion resistance
- Chucks sold separately for easy installation




#### Wood



Install with appropriate sized wood socket driver.

#### Steel

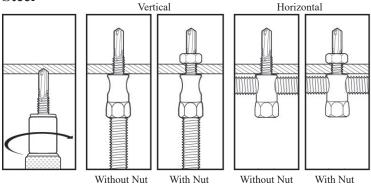

Install with appropriate sized steel socket driver.

#### Wood

Item #	Code	Description	Thread	Threaded Rod Size	Ultimate Tension Load (lbs) Vertical	Ultimate Tension Load (lbs) Horizontal	Packaged
31390	DHW38-25	3/8" x 2-1/4" Wood Dual Hanger	5/16"	3/8"	2,670	1,450	25/Bag

### **Steel**

Item#	Code	Description	Thread	Threaded Rod Size	Mount Direction	Ultimate Tension Load (lbs) by Steel Gauge/Thickness				Pkg	
						16	14	12	1/8	3/16	
31391	DHS38-25	3/8" x 1-1/2" Steel Dual Hanger	1/4-20	3/8"	Vertical w/out nut	785	1,140	1,740	2,375	4,695	25/Bag
					Vertical w/nut	3,435	4,025	4,280	4,690	4,695	
					Horizontal w/out nut	1,740	1,945	2,420	2,570	2,810	
					Horizontal w/nut	2,755	2,810	2,570	2,810	2,810	

Please see our Dyna-Tite testing and warnings webpagefor the most detailed list of warnings: http://www.durodyne.com/DTTesting.php

