

**189BNV EVOLUTION® V
VARIABLE SPEED AIR CONDITIONER
WITH PURON® REFRIGERANT
1 - 5 TON**



Product Data



The Evolution V air conditioner offers high-efficiency variable speed performance in a remarkably small cabinet and provides up to 19 SEER cooling efficiency. The variable speed inverter capacity control delivers up to 5 stages of operation for exceptional load matching, dehumidification and zoning performance.

This product has been designed and manufactured to provide flexible system matching and work with a wide variety of indoor units and controls.

NOTE: Ratings contained in this document are subject to change at any time. Always refer to the AHRI directory (www.ahridirectory.org) for the most up-to-date ratings information.

INDUSTRY LEADING FEATURES / BENEFITS

Energy Efficiency

- Up to 19 SEER / up to 13 EER
- Microtube Technology™ refrigeration system

Sound

- Sound level as low as 56 dBA in low speed (Silencer System II).
- Soft start and smooth ramp to operating speeds

Comfort

- Variable speed compressor operates at 5 stages with capacity range from as wide as 25-100%
- Air cooled Inverter variable speed drive
 - System requires Evolution® Connex™ Control with version 11 software or newer for 5 stage operation
 - Ratings provided with 2-stage thermostats and suitable non-communicating indoor products for 2-stage operation.

Reliability

- Puron® refrigerant - environmentally sound, won't deplete the ozone layer and low lifetime service cost.
- Front-seating service valves
- Inverter control drives compressor and fan motor
- No control module attached to fan motor
- Evolution intelligence monitors critical system parameters
- Pressure equalizer valve for easy compressor starting
- High pressure switch
- Suction pressure transducer
- Compressor discharge temperature sensor
- Suction temperature sensor
- Filter drier (field installed)
- Internal crankcase heater standard

Flexibility and installation:

- 2 control wires to outdoor unit in complete Evolution system and Control
- Smaller and lighter than 2-stage units
- Minimum and Maximum adjustments with Evolution® Connex™ Control
- Compatible with non-communicating thermostats

Durability

DuraGuard™ protection package:

- Solid, Durable sheet metal construction
- Steel louver coil guard
- Baked-on, complete outer coverage, powder paint

Applications

- Line sets up to 100 ft (30.5 m) equivalent length
- No long-line accessories required.

MODEL NUMBER NOMENCLATURE

1	2	3	4	5	6	7	8	9	10	11	12	14
N	N	N	A	A/N	N	N	N	N	A/N	A/N	N	A
1	8	9	B	N	V	0	3	6	0	0	0	A
Product Family 1=AC	Tier 8= Evolution Series	SEER 9 = 19 SEER	Major Series B=Puron	Voltage N= 208-230-1 or 208/230-1	Variations V = Variable Speed	Cooling Capacity			0=Not Defined B=Design Variation	Open 0=Not Defined	Open 0=Not Defined	Series A = Original Series



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.



ISO 9001
QMI-SAI Global



STANDARD FEATURES

FEATURES	Unit Size – Voltage, Series							
	13	24A 24B	25	36	37	48	49	60
Puron Refrigerant	X	X	X	X	X	X	X	X
Variable Speed Rotary Compressor	X	X	X	X	X	X	X	X
Air-Cooled Integrated Inverter Drive	X	X	X	X	X	X	X	X
Louvered Coil Guard	X	X	X	X	X	X	X	X
Field Installed Filter Drier	X	X	X	X	X	X	X	X
Front Seating Service Valves	X	X	X	X	X	X	X	X
Internal Pressure and Temperature Protection	X	X	X	X	X	X	X	X
Suction Pressure Transducer	X	X	X	X	X	X	X	X
High Pressure Switch	X	X	X	X	X	X	X	X
Internal Crankcase Heater	X	X	X	X	X	X	X	X
Enhanced Diagnostics with Evolution® Connex™ Control (version 11 software or newer)	X	X	X	X	X	X	X	X
Deluxe Sound Blanket	X	X	X	X	X	X	X	X
Outdoor Air Temperature Sensor	X	X	X	X	X	X	X	X

X = Standard

PHYSICAL DATA

UNIT SIZE SERIES	13-A	24A-A	24B-A	25-A	36-A	37-A	48-A	49-A	60-A
Compressor Type	Variable Speed Rotary								
REFRIGERANT	Puron® (R-410A)								
Control	TXV (Puron® Hard Shutoff)								
Charge lb (kg)	4.6 (2.09)	5.5 (2.50)	4.80 (2.18)	5.5 (2.50)	6.0 (2.72)	7.5 (3.40)	7.5 (3.40)	9.6 (4.35)	8.30 (3.76)
COND FAN	Forward Swept Propeller Type, Direct Drive								
Air Discharge	Vertical								
Air Qty (CFM)	1600	2500	2500	2500	2500	4500	4500	4800	4500
Motor HP	1/5	1/3	1/5	1/3	1/3	1/3	1/3	1/3	1/3
Motor RPM	650	1050	825	1050	1050	850	850	850	900
COND COIL									
Face Area (Sq ft)	11.12	13.90	11.12	13.90	13.90	21.50	21.50	27.53	23.65
Fins per In.	20	20	20	20	20	20	20	25	20
Rows	1	1	1	1	1	1	1	1	1
Circuits	6	6	5	6	6	8	8	8	8
VALVE CONNECT. (In. ID)									
Vapor	5/8	3/4	5/8	3/4	3/4	7/8	7/8	7/8	7/8
Liquid	3/8								
REFRIGERANT TUBES (In. OD)									
Rated Vapor*	3/4	7/8	3/4	7/8	7/8	1-1/8	1-1/8	1-1/8	1-1/8
Max Liquid Line	3/8								

* Units are rated with 25 ft (7.6 m) of lineset length. See Vapor Line Sizing and Cooling Capacity Loss table when using other sizes and lengths of lineset.

Note: See unit Installation Instruction for proper installation.

REFRIGERANT PIPING LENGTH LIMITATIONS

Maximum Line Lengths:

The maximum allowable total equivalent length for air conditioners can vary depending on the vertical separation. See the tables below for allowable lengths depending on whether the outdoor unit is on the same level, above or below the outdoor unit.

Maximum Line Lengths for Air Conditioner Applications

	MAXIMUM ACTUAL LENGTH ft (m)	MAXIMUM EQUIVALENT LENGTH† ft (m)	MAXIMUM VERTICAL SEPARATION ft (m)
Units on equal level	100 (30.5)	100 (30.5)	N/A
Outdoor unit ABOVE indoor unit	100 (30.5)	100 (30.5)	100 (30.5)
Outdoor unit BELOW indoor unit	See Table 'Maximum Total Equivalent Length: Outdoor Unit BELOW Indoor Unit'		

† Total equivalent length accounts for losses due to elbows or fitting. See the Long Line Guideline for details.

Maximum Total Equivalent Length† - Outdoor Unit BELOW Indoor Unit

Size	Liquid Line Diameter w/ TXV	AC with Puron® Refrigerant – Maximum Total Equivalent Length† Vertical Separation ft (m) Outdoor unit BELOW indoor unit;						
		0–20 (0 – 6.1)	21–30 (6.4 – 9.1)	31–40 (9.4 – 12.2)	41–50 (12.5 – 15.2)	51–60 (15.5 – 18.3)	61–70 (18.6 – 21.3)	71–80 (21.6 – 24.4)
1–Ton	3/8	100*	100*	100*	100*	100*	100*	100*
2–Ton	3/8	100*	100*	100*	100*	100*	100*	100*
3–Ton	3/8	100*	100*	100*	100*	100*	100*	100*
4–Ton	3/8	100*	100*	100*	100*	100	100	--
5–Ton	3/8	100*	100*	100*	100*	100	100	--

* Maximum actual length not to exceed 100 ft (30.5 m)

† Total equivalent length accounts for losses due to elbows or fitting.

-- = outside acceptable range

LONG LINE APPLICATIONS

Unit is approved for up to 100 ft (30.5 m) equivalent length and vertical separations shown above with no additional accessories. Longer line set applications are not permitted.

COOLING CAPACITY LOSS TABLE

Nominal Size (Btuh)	Line OD (in.)	189BNV Cooling Capacity Loss (%)				
		Total Equivalent Line Length (ft)				
		25	50	75	80	100
13	5/8	0.5	1.2	1.8	1.9	2.4
	3/4	0.1	0.4	0.6	0.7	0.8
24B	5/8	0.5	1.2	1.8	1.9	2.4
	3/4	0.1	0.4	0.6	0.7	0.8
24A 25	5/8	0.5	1.2	1.8	1.9	2.4
	3/4	0.1	0.4	0.6	0.7	0.8
	7/8	0.0	0.1	0.3	0.3	0.4
36 37	5/8	1.1	2.4	3.7	4.0	5.0
	3/4	0.3	0.8	1.3	1.4	1.8
	7/8	0.0	0.3	0.5	0.6	0.8
48 49	3/4	0.7	1.6	2.4	2.6	3.2
	7/8	0.3	0.7	1.1	1.2	1.6
	1 1/8	0.0	0.1	0.2	0.3	0.4
60	3/4	1.0	2.3	3.5	3.8	4.8
	7/8	0.4	1.0	1.7	1.8	2.3
	1 1/8	0.0	0.1	0.3	0.4	0.5

Rating Line Size in **BOLD**

MIN/MAX AIRFLOW TABLES

The indoor airflow delivered by this system varies significantly based on outdoor temperature, indoor unit combination, and system demand. The airflows on these tables are for duct design considerations. Duct systems capable of these ranges will ensure

the system will deliver full capacity at all outdoor temperatures. Minimum and maximum airflows can be adjusted from these numbers in the Evolution Control Setup screen.

Cooling – Comfort Mode			Minimum Cooling (Dehum or Zoning)
Size	Max Stage 5 Airflow	Max Stage 1 Airflow	
1 – Ton	420	300	300
2 – Ton	739	263	222
3 – Ton	990	289	236
4 – Ton	1389	542	457
5 – Ton	1600	700	600

Cooling – Efficiency Mode		
Size	Max Stage 5 Airflow	Max Stage 1 Airflow
1 – Ton	420	300
2 – Ton	825	585
3 – Ton	1050	600
4 – Ton	1400	875
5 – Ton	1800	975

Cooling Max Mode		
Size	Max Stage 5 Airflow	Max Stage 1 Airflow
1 – Ton (550 cfm/ delivered ton)	780	434
2 – Ton (24)	850	585
2 – Ton (25) (550 cfm/ delivered ton)*	1350	510
3 – Ton	1200	600
4 – Ton	1600	875
4 – Ton – 49	1450	875
5 – Ton	2000	975

* Serial number beginning with 0115E and newer

LEGEND:

Max Capacity Airflow – Stage 5 airflow varies depending on conditions. This is the highest airflow the system will attempt to deliver in this particular mode. Ductwork for non-zoned systems should be sized for this airflow to ensure the system can deliver full capacity when needed. Improper duct design may result in excessive airflow noise and/or cutback occurrences at max airflow conditions.

Highest Min. Capacity Airflow – Stage 1 airflow also varies depending on conditions. In zoned systems, each zone must be capable of delivering this airflow for the system to deliver full capacity into the zone. Otherwise, airflow may be diverted to other zones or cutback may occur.

Min Cooling (Dehum or Zoning) – Lowest airflow the system will deliver. May operate down to this airflow in dehumidification mode or in zoning applications where ductwork restrictions have caused the blower to cut-back.

ELECTRICAL DATA

UNIT SIZE – VOLTAGE, SERIES	V/PH	OPER VOLTS*		COMPR		FAN	MCA	MAX FUSE ** or CKT BRK AMPS
		MAX	MIN	LRA	RLA	FLA		
13 – A	208 – 230 – 1	253	197	N/A	10.32	0.58	13.5	20
24A – A				N/A	17.70	1.20	23.6	40
24B – A				N/A	10.32	0.58	13.5	20
25 – A				N/A	17.70	1.20	23.6	40
36 – A				N/A	18.30	1.20	24.4	40
37 – A				N/A	23.9	1.20	31.4	50
48 – A				N/A	23.9	1.20	31.4	50
49 – A				N/A	23.9	1.40	31.4	50
60 – A				N/A	31.3	1.40	40.8	60

* Permissible limits of the voltage range at which the unit will operate satisfactorily

** Time – Delay fuse.

FLA – Full Load Amps

LRA – Locked Rotor Amps

MCA – Minimum Circuit Amps

RLA – Rated Load Amps

NOTE: Control circuit is 24 – V on all units and requires external power source. Copper wire must be used from service disconnect to unit.

All motors/compressors contain internal overload protection.

Complies with 2010 requirements of ASHRAE Standards 90.1

CHARGING SUBCOOLING (TXV-TYPE EXPANSION DEVICE)

UNIT SIZE – VOLTAGE, SERIES	
13 – A	If an Evolution Control is installed, subcooling recommendation displayed in Charging Mode must be followed. If not, subcooling chart shown on the charging label must be followed
24A – A, 24B – A	
25 – A	
36 – A	
37 – A	
48 – A	
49 – A	
60 – A	

RPM-CAPACITY-SOUND (dBA)*

STAGE #	COMP RPM	CAPACITY %	SOUND (dBA)
189BNV013			
1	1500	58%	58
2	1867	72%	59
3	2100	81%	59
4	2350	90%	59
5	2600	100%	60
189BNV024A			
1	1200	36%	56
2	1900	58%	61
3	2400	73%	64
4	2600	79%	68
5	3300	100%	71
189BNV024B			
1	1500	35%	55
2	2566	56%	60
3	3150	69%	65
4	3950	87%	66
5	4700	100%	68
189BNV025			
1	1200	36%	56
2	1900	58%	61
3	2400	73%	63
4	2600	79%	67
5	3300	100%	69
189BNV036			
1	1200	25%	56
2	2400	50%	61
3	3300	69%	65
4	4200	88%	69
5	4800	100%	71
189BNV037			
1	1200	40%	56
2	1800	60%	63
3	2200	73%	67
4	2600	87%	67
5	3000	100%	68
189BNV048			
1	1500	35%	62
2	2460	57%	65
3	2800	65%	67
4	3650	84%	70
5	4320	100%	72
189BNV049			
1	1200	38%	57
2	1840	59%	62
3	2300	74%	66
4	2700	87%	68
5	3120	100%	69
189BNV060			
1	1200	32%	57
2	2180	55%	61
3	2850	70%	64
4	3700	90%	70
5	4140	100%	72

*Estimated sound for stages 2, 3, and 4
 For 2-stage operation: Low = Stage 2, High = Stage 5

SOUND POWER LEVEL (dBA)

Unit Size – Voltage, Series	Typical Octave Band Spectrum (without tone adjustment)	Min Speed Cooling	Max Speed Cooling
13 – A	Freq (Hz)	1500	2600
	125	46.5	46.5
	250	50.5	54.0
	500	52.0	53.5
	1000	50.0	51.0
	2000	47.0	47.5
	4000	40.5	47.0
	8000	45.5	45.0
	Sound Rating (dBA)	58	60
24A – A	Freq (Hz)	1200 RPM	3300 RPM
	125	40.4	43.9
	250	44.4	53.9
	500	46.3	61.8
	1000	45.0	59.0
	2000	37.2	56.7
	4000	31.0	60.0
	8000	28.4	45.4
	Sound Rating (dBA)	56	71
24B – A	Freq (Hz)	1500 RPM	4700 RPM
	125	40.5	44.0
	250	45.5	49.5
	500	41.5	53.0
	1000	44.0	52.5
	2000	39.0	50.5
	4000	34.5	53.0
	8000	31.0	45.0
	Sound Rating (dBA)	55	67
25 – A	Freq (Hz)	1200 RPM	3300 RPM
	125	40.4	45.4
	250	44.4	57.9
	500	46.3	61.3
	1000	45.0	58.0
	2000	37.2	54.7
	4000	31.0	52.0
	8000	28.4	41.9
	Sound Rating (dBA)	56	69
36 – A	Freq (Hz)	1200 RPM	4800 RPM
	125	40.4	43.9
	250	44.4	53.9
	500	46.3	61.8
	1000	45.0	59.0
	2000	37.2	56.7
	4000	31.0	60.0
	8000	28.4	45.4
	Sound Rating (dBA)	56	71
37 – A	Freq (Hz)	1200	3000
	125	45.0	54.5
	250	48.5	59.0
	500	50.5	63.0
	1000	50.0	60.5
	2000	44.0	59.5
	4000	37.5	57.5
	8000	44.5	52.0
	Sound Rating (dBA)	56	68
48 – A	Freq (Hz)	1500 RPM	4320 RPM
	125	40.9	42.4
	250	46.4	54.4
	500	47.3	60.3
	1000	56.5	63.5
	2000	39.2	56.7
	4000	35.0	56.0
	8000	31.9	44.9
	Sound Rating (dBA)	62	72
49 – A	Freq (Hz)	1200	3120
	125	44.5	52.0
	250	48.5	63.0
	500	50.5	63.5
	1000	51.5	67.5
	2000	47.5	61.5
	4000	43.5	58.5
	8000	47.5	54.5
	Sound Rating (dBA)	57	73
60 – A	Freq (Hz)	1200 RPM	4140 RPM
	125	39.0	49.5
	250	48.0	59.5
	500	46.5	62.0
	1000	45.5	60.0
	2000	39.5	58.5
	4000	36.5	55.0
	8000	35.5	48.0
	Sound Rating (dBA)	57	72

NOTE: Tested in compliance with AHRI 270–2008 but not listed with AHRI.

ACCESSORIES

KIT NUMBER	KIT NAME	13-A	24A-A 24B-A	25-A	36-A	37-A	48-A	49-A	60-A
KSASF0101AAA	SPRT FEET KIT					X	X	X	X
KSASF0201AAA	SPRT FEET KIT	X	X	X	X	X			
KSATX0201PUR	TXV KIT	X	X	X					
KSATX0301PUR	TXV KIT				X	X			
KSATX0401PUR	TXV KIT						X	X	
KSATX0501PUR	TXV KIT								X
KSBTX0201PUR	TXV KIT	X	X	X					
KSBTX0301PUR	TXV KIT				X	X			
KSBTX0401PUR	TXV KIT						X	X	

x = Accessory S = Standard

Accessory Description and Usage

Support Feet

Raises unit above base pad. 2 and 3 ton kit contains 5 feet for stable installation with small base. 4 and 5 ton kit contains 4 feet.

Usage Guideline:

Recommended for rooftop applications

Thermostatic Expansion Valve (TXV)

A modulating flow-control valve which meters refrigerant liquid flow rate into the evaporator in response to the superheat of the refrigerant gas leaving the evaporator.

Usage Guideline:

Required if indoor unit does not already contain Puron® refrigerant TXV

CONTROLS

SYSTXBECN01-A	Evolution Connex Control (non-Wi-Fi) version 11 or newer
SYSTXBEC01-A	Evolution Connex Control (Wi-Fi)
SYSTXBECW01-A	Evolution Connex Control with Wi-Fi & Wireless Access Point
SYSTXBBNIM01	Evolution Network Interface Module (Connects Heat Recovery and Energy Recovery Ventilators on non-zoning applications.)
SYSTXBB4ZC01	Evolution 4-Zone Damper Control Module
SYSTXBBSMS01-E	Evolution Smart Sensor

THERMOSTATS


PART NUMBER	PROGRAM	GAS	ELECTRIC	HEAT	COOL
T6-PAC01	7-Day	√	√	1	1
T6-NRH01-A	NP	√	√	3	2
T6-NAC01	NP	√	√	1	1

DIMENSIONS - ENGLISH

UNIT	SERIES	ELECTRICAL CHARACTERISTICS	A	B	C	D	E	F	G	K	L	M	N	P	OPERATING WEIGHT (lbs)	SHIPPING WEIGHT (lbs)	SHIPPING DIMENSIONS (L x W x H)
189BNV0130	A	X 0 0 0	23 1/8"	31 13/16"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	11 1/4"	11 1/4"	14 1/2"	139	162	25 1/4" X 25 1/4" X 35 5/8"
189BNV0240	A	X 0 0 0	23 1/8"	31 13/16"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	10 3/4"	10 3/4"	18 1/4"	160	186	25 1/4" X 25 1/4" X 43 3/8"
189BNV024B	A	X 0 0 0	23 1/8"	31 13/16"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	11 1/4"	11 1/4"	14 1/2"	139	162	25 1/4" X 25 1/4" X 35 5/8"
189BNV0250	A	X 0 0 0	23 1/8"	38 1/2"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	10 3/4"	10 3/4"	18 1/4"	160	186	25 1/4" X 25 1/4" X 43 3/8"
189BNV0360	A	X 0 0 0	23 1/8"	38 1/2"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	10 3/4"	10 3/4"	18 1/4"	160	186	25 1/4" X 25 1/4" X 43 3/8"
189BNV0370	A	X 0 0 0	31 3/16"	38 15/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	14 1/2"	14 5/8"	18 3/4"	216	255	33 3/8" X 33 3/8" X 46 1/8"
189BNV0480	A	X 0 0 0	31 3/16"	38 15/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	14 1/2"	14 5/8"	18 3/4"	216	255	33 3/8" X 33 3/8" X 46 1/8"
189BNV0490	A	X 0 0 0	35"	43 11/16"	3 7/8"	7/8"	6 9/16"	28 7/16"	9 1/8"	2 15/16"	5/8"	16 1/4"	16 1/4"	21 1/4"	262	300	36 1/8" X 39 1/4" X 50 3/16"
189BNV0600	A	X 0 0 0	31 3/16"	42 5/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	16 1/2"	15"	20"	241	282	33 3/8" X 33 3/8" X 49 9/16"

X = YES
O = NO

208/Z30-160	230-160	208/Z30-360	460-360
-------------	---------	-------------	---------

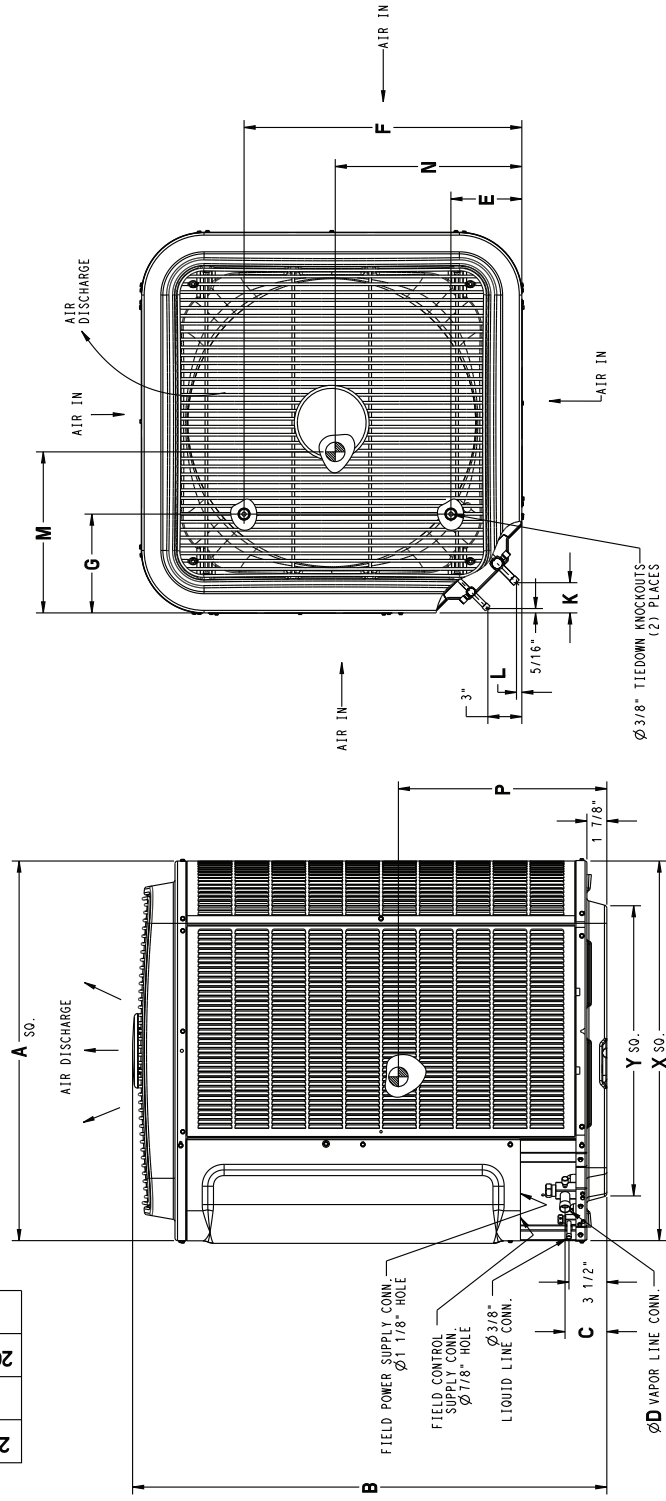

When installing, allow sufficient space for airflow clearance, wiring, refrigerant piping, and service. Allow 24 in. (609.6 mm) clearance to service end of unit and 48 in. (1219.2 mm) above unit. For proper airflow, a 6-in. (152.4 mm) clearance on 1 side of unit and 12-in. (304.8 mm) on all remaining sides must be maintained. Maintain a distance of 24 in. (609.6 mm) between units or 18 in. (457.2 mm) if no overhang within 12 ft. (3.66 m) Position so water, snow, or ice from roof or eaves cannot fall directly on unit.

NOTE: 18" (457.2 mm) clearance option described above is approved for outdoor units with wire grille coil guard only. Units with lower panels require 24" (609.6 mm) between units.

On rooftop applications, locate unit at least 6 in. (152.4 mm) above roof surface.


UNIT SIZE	X" MIN GROUND MOUNTING PAD APPLICATION DIMENSIONS	Y" MIN ROOF-TOP MOUNTING PAD APPLICATION DIMENSIONS
13, 24, 25, 36	23 1/8"	17 3/4"
49	25 3/4"	20 7/16"
37, 48, 60	31 3/16"	23"
49	35"	26 3/4"

DIMENSIONS - SI

UNIT	SERIES	ELECTRICAL CHARACTERISTICS	A	B	C	D	E	F	G	K	L	M	N	P	OPERATING WEIGHT (Kgs)	SHIPPING WEIGHT (Kgs)	SHIPPING DIMENSIONS (L x W x H)
189BNV0130	A	X 0 0 0	587.3	807.3	96.1	19.1	112.7	458.8	198.4	71.4	12.7	285.8	285.8	368.3	63.0	73.5	641.5 X 641.5 X 905.2
189BNV0240	A	X 0 0 0	587.3	980.1	96.1	19.1	112.7	458.8	198.4	71.4	12.7	273.1	273.1	463.6	72.6	84.4	641.5 X 641.5 X 1102.2
189BNV0248	A	X 0 0 0	587.3	807.3	96.1	19.1	112.7	458.8	198.4	71.4	12.7	285.8	285.8	368.3	63.0	73.5	641.5 X 641.5 X 905.2
189BNV0250	A	X 0 0 0	587.3	980.1	96.1	19.1	112.7	458.8	198.4	71.4	12.7	273.1	273.1	463.6	72.6	84.4	641.5 X 641.5 X 1102.2
189BNV0360	A	X 0 0 0	587.3	980.1	96.1	19.1	112.7	458.8	198.4	71.4	12.7	273.1	273.1	463.6	72.6	84.4	641.5 X 641.5 X 1102.2
189BNV0370	A	X 0 0 0	792.2	988.5	98.4	22.2	166.7	627.1	231.8	74.6	15.9	368.3	371.5	476.3	98.0	115.7	846.6 X 846.6 X 1172.2
189BNV0480	A	X 0 0 0	792.2	988.5	98.4	22.2	166.7	627.1	231.8	74.6	15.9	368.3	371.5	476.3	98.0	115.7	846.6 X 846.6 X 1172.2
189BNV0490	A	X 0 0 0	889.0	1111.0	98.4	22.2	166.7	722.3	231.8	74.6	15.9	412.8	412.8	539.8	118.8	136.1	917.7 X 997.7 X 1274.9
189BNV0600	A	X 0 0 0	792.2	1074.9	98.4	22.2	166.7	627.1	231.8	74.6	15.9	419.1	381.0	508.0	109.3	127.9	846.6 X 846.6 X 1258.6

X = YES
O = NO

208/230-160	230-160	208/230-3-60	460-3-60
-------------	---------	--------------	----------

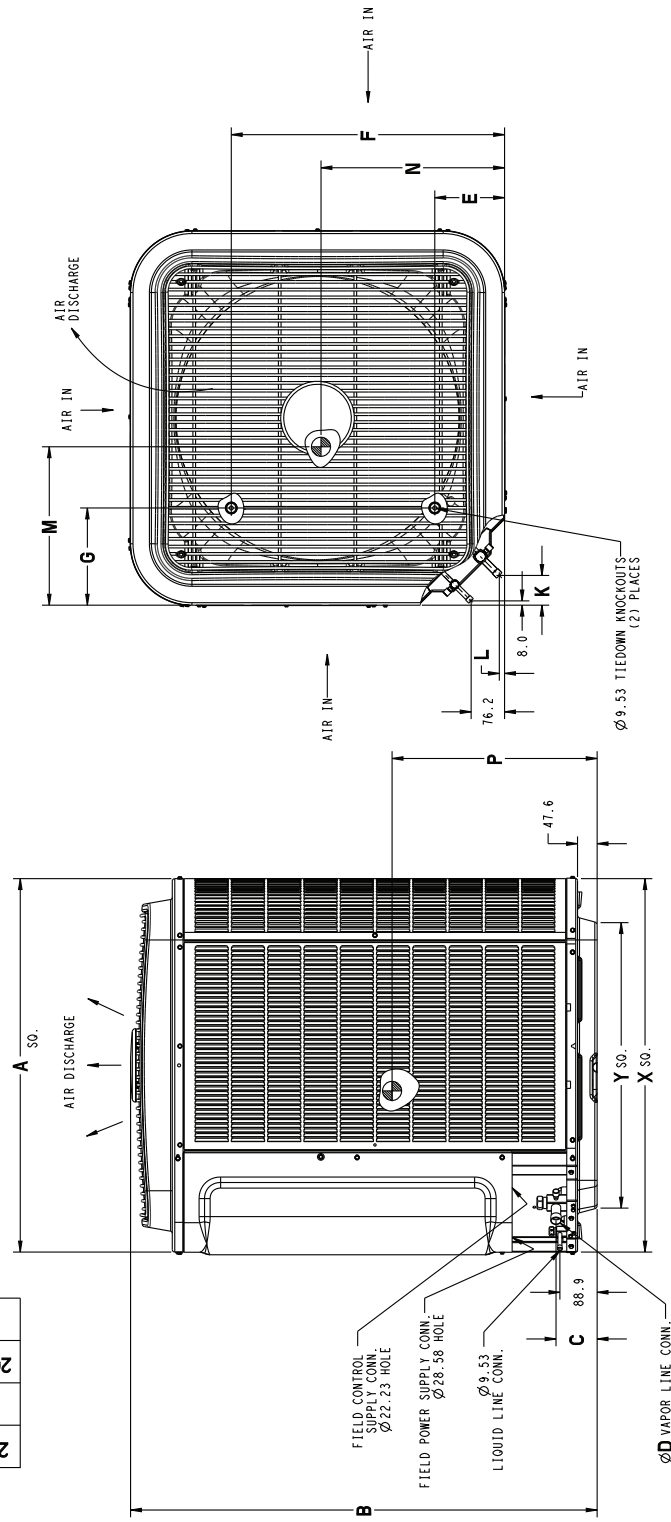

UNIT SIZE	X" MIN GROUND MOUNTING PAD APPLICATION DIMENSIONS	Y" MIN ROOF-TOP MOUNTING PAD APPLICATION DIMENSIONS
13, 24, 25, 36	587.4	451.3
49	654.0	518.5
37, 48, 60	792.2	583.2
49	889.0	679.7

When installing, allow sufficient space for airflow clearance, wiring, refrigerant piping, and service. Allow 24 in. (609.6 mm) clearance to service end of unit and 48 in. (1219.2 mm) above unit. For proper airflow, a 6-in. (152.4 mm) clearance on 1 side of unit and 12-in. (304.8 mm) on all remaining sides must be maintained. Maintain a distance of 24 in. (609.6 mm) between units or 18 in. (457.2 mm) if no overhang within 12 ft. (3.66 m) Position so water, snow, or ice from roof or eaves cannot fall directly on unit.

NOTE: 18" (457.2 mm) clearance option described above is approved for outdoor units with wire grille coil guard only. Units with lower panels require 24" (609.6 mm) between units.

On rooftop applications, locate unit at least 6 in. (152.4 mm) above roof surface.

TESTED AHRI COMBINATION RATINGS*

NOTE: Ratings contained in this document are subject to change at any time.

For AHRI ratings certificates, please refer to the AHRI directory www.ahridirectory.org
Additional ratings and system combinations can be accessed via the Bryant database at: www.MyBryantRatings.com

For performance data at specific application &/or design conditions with various indoor unit combinations, the equipment performance calculator can be accessed at : <http://rpmobrv.wrightsoft.com/>

Model Number	Coil Model Number	Furnace Model Number	Cooling Capacity High	SEER	EER	ID CFM
189BNV013-A	FE4ANF002L+UI		12800	17.0	13.0	420
189BNV024A-A	FE4AN(B,F)005L+UI		23000	18.0	11.0	825
189BNV024A-A	FV4CN(B,F)003L		22600	16.0	11.0	700
189BNV024B-A	FE4ANF002L+UI		24000	18.0	11.0	825
189BNV024B-A	FV4CNF002L		23800	16.0	11.0	700
189BNV025-A	FE4AN(B,F)005L+UI		24000	19.0	12.5	825
189BNV025-A	FV4CN(B,F)003L		22600	19.0	12.2	700
189BNV036-A	FE4AN(B,F)005L+UI		35000	18.0	10.5	1050
189BNV036-A	FV4CN(B,F)005L		35000	16.0	10.5	1050
189BNV037-A	FE4ANB006L+UI		33600	19.0	13.0	1050
189BNV048-A	FE4ANB006L+UI		46500	19.0	11.0	1400
189BNV048-A	FV4CNB006L		46000	15.5	11.0	1400
189BNV049-A	*CNPV*6024AL*	315(A,J)AV066155	44500	19.0	12.5	1200
189BNV060-A	FE4ANB006L+UI		57000	17.0	10.0	1600
189BNV060-A	FV4CNB006L		57500	15.0	10.0	1750

* Ratings are net values reflecting the effects of circulating fan heat. Supplemental electric heat is not included. Ratings are based on:

Cooling Standard: 80°F (27°C) db 67°F (19°C) wb indoor entering air temperature and 95°F (35°C) db air entering outdoor unit.

EER — Energy Efficiency Ratio

SEER — Seasonal Energy Efficiency Ratio

UI — User Interface

NOTE: Ratings contained in this document are subject to change at any time.

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE

EDB °F (°C)	EVAP. AIR °F (°C)	188BNV013 / FE4ANF02L Efficiency Needs Condenser Entering Air Temperature F (°C)																		
		115 (46.1)			105 (40.5)			95 (35)			85 (29.4)			75 (23.9)			65 (18.3)			
		ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†
75 (23.9)	72 (22.2)	420	12.59	5.26	1.36	13.48	5.59	1.17	14.21	5.86	0.98	15.07	6.18	0.81	15.92	6.51	0.65	16.76	6.83	0.50
	67 (19.4)		11.37	7.16	1.35	12.17	7.50	1.17	12.84	7.79	0.98	13.61	8.13	0.82	14.37	8.46	0.67	15.11	8.79	0.53
	63 (17.2)		10.47	8.84	1.34	11.21	8.99	1.17	11.83	9.30	0.99	12.53	9.64	0.83	13.22	9.98	0.69	13.89	10.32	0.56
	57 (13.9)		9.83	9.83	1.34	10.40	10.40	1.17	10.89	10.89	0.99	11.42	11.42	0.84	11.93	11.93	0.71	12.42	12.42	0.59
	67 (19.4)		12.55	7.18	1.36	13.44	7.52	1.17	14.16	7.81	0.98	15.02	8.15	0.81	15.87	8.49	0.65	16.71	8.83	0.50
80 (26.7)	72 (22.2)	420	10.52	10.47	1.35	11.23	10.87	1.17	11.84	11.20	0.99	12.54	11.57	0.83	13.22	11.93	0.69	13.88	12.28	0.56
	67 (19.4)		11.34	9.04	1.35	12.13	9.40	1.17	12.80	9.71	0.98	13.57	10.07	0.82	14.33	10.42	0.67	15.07	10.76	0.53
	63 (17.2)		10.48	10.48	1.34	11.08	11.08	1.17	11.59	11.59	0.99	12.16	12.16	0.83	12.70	12.70	0.70	13.22	13.22	0.57
	57 (13.9)		10.14	4.18	1.01	10.85	4.45	0.90	12.12	5.12	0.77	12.91	5.41	0.66	13.68	5.70	0.54	14.43	5.98	0.42
	67 (19.4)		9.12	5.54	1.01	9.75	5.82	0.91	10.91	7.08	0.79	11.61	7.38	0.66	12.29	7.68	0.57	12.95	7.97	0.47
75 (23.9)	72 (22.2)	300	8.38	6.82	1.01	8.96	6.90	0.91	10.04	8.80	0.79	10.67	8.92	0.69	11.28	9.23	0.60	11.88	9.53	0.50
	67 (19.4)		7.73	7.73	1.00	8.17	8.17	0.92	9.57	9.57	0.80	10.07	10.07	0.70	10.54	10.54	0.61	11.01	11.01	0.52
	63 (17.2)		10.10	5.57	1.01	10.82	5.86	0.90	12.07	7.11	0.77	12.86	7.42	0.66	13.63	7.73	0.54	14.38	8.03	0.42
	57 (13.9)		9.09	6.92	1.01	9.73	7.22	0.91	10.89	9.03	0.79	11.58	9.36	0.66	12.25	9.68	0.57	12.91	9.99	0.47
	67 (19.4)		8.39	7.99	1.01	8.97	8.29	0.91	10.24	10.24	0.79	10.78	10.78	0.69	11.34	11.19	0.59	11.92	11.53	0.50
80 (26.7)	72 (22.2)	300	8.23	8.23	1.01	8.70	8.70	0.91	10.23	10.23	0.79	10.75	10.75	0.69	11.26	11.26	0.60	11.76	11.76	0.50
	67 (19.4)		8.50	3.45	0.83	9.09	3.68	0.77	8.44	3.80	0.51	9.06	3.83	0.44	9.67	4.05	0.36	10.28	4.28	0.28
	63 (17.2)		7.65	4.36	0.83	8.17	4.60	0.77	7.61	5.05	0.51	8.16	5.29	0.45	8.70	5.53	0.39	9.23	5.77	0.31
	57 (13.9)		7.04	5.08	0.82	7.51	5.32	0.77	7.02	6.18	0.51	7.51	6.44	0.46	8.00	6.69	0.40	8.46	6.93	0.34
	67 (19.4)		6.23	6.15	0.81	6.63	6.39	0.77	6.75	6.75	0.52	7.16	7.16	0.47	7.54	7.54	0.41	7.90	7.90	0.36
75 (23.9)	72 (22.2)	200	8.48	4.39	0.83	9.06	4.63	0.77	8.40	5.06	0.51	9.02	5.30	0.44	9.64	5.55	0.36	10.24	5.80	0.28
	67 (19.4)		7.63	5.29	0.83	8.15	5.54	0.77	7.59	6.49	0.51	8.14	6.76	0.45	8.68	7.02	0.39	9.21	7.28	0.31
	63 (17.2)		7.03	6.01	0.82	7.49	6.26	0.77	7.23	7.23	0.51	7.66	7.66	0.46	8.08	8.08	0.40	8.50	8.42	0.33
	57 (13.9)		6.58	6.58	0.82	6.94	6.94	0.77	7.22	7.22	0.51	7.65	7.65	0.46	8.06	8.06	0.40	8.46	8.46	0.34
	67 (19.4)		8.50	3.45	0.83	9.09	3.68	0.77	8.44	3.80	0.51	9.06	3.83	0.44	9.67	4.05	0.36	10.28	4.28	0.28
80 (26.7)	72 (22.2)	300	7.65	4.36	0.83	8.17	4.60	0.77	7.61	5.05	0.51	8.16	5.29	0.45	8.70	5.53	0.39	9.23	5.77	0.31
	67 (19.4)		7.04	5.08	0.82	7.51	5.32	0.77	7.02	6.18	0.51	7.51	6.44	0.46	8.00	6.69	0.40	8.46	6.93	0.34
	63 (17.2)		6.23	6.15	0.81	6.63	6.39	0.77	6.75	6.75	0.52	7.16	7.16	0.47	7.54	7.54	0.41	7.90	7.90	0.36
	57 (13.9)		8.48	4.39	0.83	9.06	4.63	0.77	8.40	5.06	0.51	9.02	5.30	0.44	9.64	5.55	0.36	10.24	5.80	0.28
	67 (19.4)		7.63	5.29	0.83	8.15	5.54	0.77	7.59	6.49	0.51	8.14	6.76	0.45	8.68	7.02	0.39	9.21	7.28	0.31

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 — Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

189BNV013

COOLING IN-DOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*FE4NF002L	1.00	1.00	
CAP**1814AL*	0.98	0.98	315(A,J)A)036070
CAP**2414AL*	0.99	0.99	315(A,J)A)036070
CAP**2417AL*	0.99	0.99	98(6*B,7*A)42060V17***
CAP**2417AL*	0.99	0.99	98(6*B,7*A)42080V17***
CNPH*2417AL*	0.99	0.99	98(6*B,7*A)42060V17***
CNPH*2417AL*	0.99	0.99	98(6*B,7*A)42080V17***
CNPV*2414AL*	1.00	1.00	315(A,J)A)036070
CNPV*2417AL*	0.99	0.99	98(6*B,7*A)42060V17***
CNPV*2417AL*	0.99	0.99	98(6*B,7*A)42080V17***
CSPH*2412AL*	1.00	1.00	98(6*B,7*A)42060V17***
CSPH*2412AL*	1.00	1.00	98(6*B,7*A)42080V17***

See additional notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVAP. AIR	1995N0241, FEANF005 Efficiency Mode Condenser Entering Air Temperature F (°C)																		
		115 (46.1)			105 (40.5)			95 (35)			85 (29.4)			75 (23.9)			65 (18.3)			
		ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†
75 (23.9)	72 (22.2)		22.60	9.53	3.21	24.02	10.05	2.61	25.33	10.54	2.07	26.67	11.04	1.60	27.98	11.54	1.20	29.26	12.02	0.84
	67 (19.4)		20.56	13.19	3.20	21.88	13.76	2.63	23.10	14.31	2.09	24.34	14.86	1.64	25.55	15.41	1.24	26.73	15.95	0.89
	63 (17.2)	825	19.06	16.04	3.19	20.29	16.66	2.63	21.44	17.25	2.10	22.61	17.85	1.66	23.74	18.44	1.26	24.85	19.01	0.93
	57 (13.9)		18.10	18.10	3.18	19.09	19.09	2.63	20.04	20.04	2.11	20.97	20.97	1.67	21.89	21.89	1.29	22.78	22.78	0.96
	72 (22.2)		22.44	13.14	3.20	23.85	13.70	2.61	25.15	14.23	2.06	26.49	14.77	1.60	27.80	15.31	1.19	29.07	15.84	0.84
80 (26.7)	67 (19.4)		20.48	16.76	3.20	21.79	17.38	2.62	23.00	17.96	2.09	24.24	18.56	1.63	25.45	19.15	1.23	26.62	19.73	0.89
	63 (17.2)	825	19.26	19.26	3.19	20.37	20.18	2.63	21.49	20.85	2.10	22.63	21.51	1.65	23.75	22.15	1.26	24.85	22.77	0.92
	57 (13.9)		19.23	19.23	3.19	20.28	20.28	2.63	21.25	21.25	2.10	22.23	22.23	1.66	23.18	23.18	1.27	24.10	24.10	0.94
	72 (22.2)		15.08	6.47	1.54	16.06	6.82	1.33	16.82	7.10	1.10	17.75	7.44	0.91	18.67	7.78	0.72	19.58	8.12	0.54
	67 (19.4)	650	13.68	9.15	1.54	14.59	9.54	1.35	15.33	9.87	1.12	16.19	10.25	0.94	17.03	10.62	0.76	17.86	10.99	0.59
80 (26.7)	63 (17.2)		12.70	11.25	1.54	13.54	11.67	1.36	14.27	12.04	1.13	15.07	12.45	0.96	15.86	12.85	0.79	16.62	13.24	0.62
	57 (13.9)		12.27	12.27	1.54	12.97	12.97	1.37	13.58	13.58	1.14	14.24	14.24	0.97	14.89	14.89	0.81	15.52	15.52	0.65
	72 (22.2)		14.96	9.12	1.53	15.93	9.51	1.33	16.68	9.81	1.10	17.61	10.18	0.91	18.52	10.55	0.72	19.47	10.93	0.54
	67 (19.4)	650	13.64	11.78	1.54	14.54	12.20	1.35	15.27	12.55	1.12	16.13	12.96	0.94	16.96	13.36	0.76	17.78	13.76	0.59
	63 (17.2)		13.08	13.08	1.54	13.82	13.82	1.36	14.43	14.43	1.13	15.14	15.09	0.96	15.89	15.56	0.79	16.65	15.99	0.62
75 (23.9)	57 (13.9)		13.06	13.06	1.54	13.79	13.79	1.36	14.41	14.41	1.13	15.10	15.10	0.96	15.77	15.77	0.79	16.42	16.42	0.63
	72 (22.2)		11.92	5.31	0.85	12.72	5.59	0.82	10.55	4.66	0.46	11.18	4.89	0.44	11.84	5.13	0.39	12.52	5.37	0.28
	67 (19.4)	650	10.80	7.83	0.86	11.55	8.14	0.83	9.58	6.85	0.47	10.16	7.10	0.47	10.74	7.35	0.43	11.36	7.61	0.34
	63 (17.2)		10.05	9.78	0.86	10.74	10.13	0.84	8.93	8.56	0.49	9.46	8.83	0.49	10.00	9.10	0.46	10.55	9.37	0.38
	57 (13.9)		9.97	9.97	0.86	10.57	10.57	0.85	8.82	8.82	0.49	9.29	9.29	0.50	9.75	9.75	0.47	10.21	10.21	0.40
80 (26.7)	72 (22.2)		11.80	7.81	0.85	12.59	8.12	0.82	10.41	6.81	0.46	11.06	7.06	0.44	11.73	7.32	0.38	12.41	7.59	0.28
	67 (19.4)	650	10.80	10.29	0.86	11.52	10.64	0.83	9.55	8.98	0.47	10.13	9.25	0.47	10.71	9.53	0.43	11.32	9.81	0.34
	63 (17.2)		10.66	10.66	0.86	11.28	11.28	0.84	9.40	9.40	0.48	9.89	9.89	0.48	10.37	10.37	0.44	10.87	10.87	0.36
	57 (13.9)		10.64	10.64	0.86	11.26	11.26	0.84	9.39	9.39	0.48	9.87	9.87	0.48	10.35	10.35	0.44	10.85	10.85	0.36

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 — Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)		EVAP. AIR		189BNV024B / FE4ANF02L Efficiency Mode Condenser Entering Air Temperature F (°C)																													
				115 (46.1)					105 (40.5)					95 (35)					85 (29.4)					75 (23.9)					65 (18.3)				
				ID SCFM	Capacity MBtuh	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh	Total Sys. KW**	Total Sys. KW**						
STAGE 5																																	
75 (23.9)	72 (22.2)	23.43	9.90	2.85	25.03	10.49	2.52	28.46	11.02	2.20	28.00	11.80	1.91	29.51	12.16	1.63	31.01	12.73	1.37	825	825	825	825	825	825	825							
	67 (19.4)	21.30	13.70	2.81	22.76	14.32	2.49	24.07	14.89	2.18	25.46	15.50	1.90	26.82	16.10	1.63	28.19	16.70	1.38	825	825	825	825	825	825	825							
	63 (17.2)	19.74	16.69	2.78	21.07	17.34	2.47	22.29	17.94	2.17	23.56	18.57	1.89	24.85	19.20	1.63	26.11	19.82	1.39	825	825	825	825	825	825	825							
	57 (13.9)	18.74	18.74	2.76	19.81	19.81	2.45	20.78	20.78	2.15	21.79	21.79	1.88	22.78	22.78	1.63	23.74	23.74	1.39	825	825	825	825	825	825	825							
	67 (19.4)	23.36	13.70	2.85	24.96	14.32	2.52	26.39	14.88	2.20	27.93	15.49	1.91	29.44	16.09	1.63	30.94	16.89	1.37	825	825	825	825	825	825	825							
80 (26.7)	72 (22.2)	21.24	17.45	2.81	22.89	18.11	2.49	24.00	18.72	2.18	25.39	19.36	1.90	26.76	19.99	1.63	28.12	20.63	1.38	825	825	825	825	825	825	825							
	67 (19.4)	19.96	19.96	2.78	21.18	20.93	2.47	22.35	21.63	2.17	23.61	22.94	1.89	24.86	23.02	1.63	26.10	23.70	1.38	825	825	825	825	825	825	825							
	63 (17.2)	19.93	19.93	2.78	21.05	21.05	2.47	22.07	22.07	2.16	23.12	23.12	1.89	24.16	24.16	1.63	25.17	25.17	1.39	825	825	825	825	825	825	825							
	57 (13.9)	16.60	7.18	1.72	17.75	7.59	1.53	18.75	7.96	1.31	19.88	8.37	1.12	20.99	8.78	0.94	22.08	9.18	0.77	650	650	650	650	650	650	650							
	67 (19.4)	15.01	10.22	1.72	16.06	10.66	1.53	16.99	11.06	1.32	18.00	11.49	1.14	18.99	11.92	0.97	19.97	12.94	0.81	650	650	650	650	650	650	650							
80 (26.7)	72 (22.2)	13.88	12.59	1.71	14.82	13.06	1.54	15.70	13.48	1.32	16.62	13.94	1.15	17.52	14.38	0.99	18.40	14.82	0.84	650	650	650	650	650	650	650							
	67 (19.4)	13.48	13.48	1.71	14.25	14.25	1.54	14.97	14.97	1.32	15.70	15.70	1.16	16.40	16.40	1.01	17.10	17.10	0.86	650	650	650	650	650	650	650							
	63 (17.2)	16.54	10.24	1.72	17.89	10.68	1.53	18.68	11.07	1.31	19.81	11.51	1.12	20.92	11.94	0.94	22.01	12.37	0.77	650	650	650	650	650	650	650							
	57 (13.9)	14.98	13.23	1.72	16.01	13.70	1.53	16.94	14.13	1.32	17.95	14.59	1.14	18.93	15.05	0.97	19.91	15.50	0.81	650	650	650	650	650	650	650							
	67 (19.4)	14.42	14.42	1.72	15.24	15.24	1.53	15.99	15.99	1.32	16.77	16.77	1.15	17.61	17.39	0.99	18.46	17.89	0.83	650	650	650	650	650	650	650							
75 (23.9)	72 (22.2)	14.40	14.40	1.72	15.22	15.22	1.53	15.96	15.96	1.32	16.74	16.74	1.15	17.50	17.50	0.99	18.23	18.23	0.84	585	585	585	585	585	585	585							
	67 (19.4)	14.01	6.30	1.38	15.00	6.65	1.24	9.25	4.60	0.54	9.85	4.81	0.46	10.45	5.01	0.37	11.04	5.22	0.29	585	585	585	585	585	585	585							
	63 (17.2)	12.64	9.35	1.39	13.52	9.73	1.25	8.32	7.38	0.55	8.85	7.61	0.48	9.37	7.84	0.40	9.89	8.07	0.33	585	585	585	585	585	585	585							
	57 (13.9)	11.71	11.62	1.39	12.49	12.06	1.26	8.11	8.11	0.55	8.56	8.56	0.46	9.00	9.00	0.41	9.43	9.43	0.34	585	585	585	585	585	585	585							
	67 (19.4)	13.95	9.39	1.38	14.94	9.76	1.24	9.20	7.43	0.54	9.80	7.66	0.45	10.39	7.90	0.37	10.98	8.13	0.29	585	585	585	585	585	585	585							
80 (26.7)	72 (22.2)	12.66	12.32	1.39	13.52	12.75	1.25	8.77	8.77	0.54	9.26	9.26	0.47	9.73	9.73	0.39	10.19	10.19	0.31	585	585	585	585	585	585	585							
	67 (19.4)	12.55	12.55	1.39	13.28	13.28	1.26	8.77	8.77	0.54	9.25	9.25	0.47	9.72	9.72	0.39	10.18	10.18	0.31	585	585	585	585	585	585	585							
	63 (17.2)	12.53	12.53	1.39	13.26	13.26	1.26	8.76	8.76	0.54	9.24	9.24	0.47	9.71	9.71	0.39	10.17	10.17	0.31	585	585	585	585	585	585	585							
	57 (13.9)	14.01	6.30	1.38	15.00	6.65	1.24	9.25	4.60	0.54	9.85	4.81	0.46	10.45	5.01	0.37	11.04	5.22	0.29	585	585	585	585	585	585	585							
	67 (19.4)	12.64	9.35	1.39	13.52	9.73	1.25	8.32	7.38	0.55	8.85	7.61	0.48	9.37	7.84	0.40	9.89	8.07	0.33	585	585	585	585	585	585	585							

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 — Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB *F (°C)	EVAP. AIR	189BNV25/FE4AHF005 Efficiency Mode Condenser Entering Air Temperature F (°C)																			
		115 (46.1)			105 (40.5)			95 (35)			85 (29.4)			75 (23.9)			65 (18.3)				
		ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**
75 (23.9)	72 (22.2)	825	23.68	9.99	2.51	25.12	10.51	2.21	26.43	11.00	1.90	27.77	11.50	1.62	29.08	11.99	1.34	825	30.34	12.47	1.07
	67 (19.4)		21.55	13.82	2.50	22.88	14.39	2.21	24.10	14.93	1.92	25.35	15.48	1.65	26.55	16.01	1.39				
	63 (17.2)		19.97	16.81	2.49	21.22	17.43	2.22	22.38	18.00	1.93	23.54	18.59	1.67	24.67	19.16	1.42				
	57 (13.9)		18.96	18.96	2.48	19.97	19.97	2.21	20.91	20.91	1.94	21.84	21.84	1.69	22.75	22.75	1.45				
	72 (22.2)		23.52	13.77	2.50	24.94	14.33	2.20	26.25	14.85	1.90	27.59	15.38	1.61	28.89	15.91	1.34				
80 (26.7)	67 (19.4)	825	21.46	17.56	2.50	22.78	18.18	2.21	24.00	18.75	1.92	25.24	19.33	1.65	26.45	19.90	1.39	825	27.61	20.46	1.13
	63 (17.2)		20.19	20.19	2.49	21.30	21.10	2.22	22.43	21.76	1.93	23.57	22.40	1.67	24.68	23.02	1.42				
	57 (13.9)		20.15	20.15	2.49	21.20	21.20	2.22	22.18	22.18	1.93	23.15	23.15	1.67	24.09	24.09	1.43				
	72 (22.2)		15.55	6.67	1.25	16.54	7.02	1.17	17.29	7.30	1.03	18.23	7.64	0.91	19.14	7.98	0.77				
	67 (19.4)		14.11	9.43	1.25	15.02	9.82	1.18	15.76	10.15	1.05	16.63	10.52	0.95	17.47	10.89	0.82				
75 (23.9)	63 (17.2)	650	13.09	11.60	1.25	13.94	12.02	1.19	14.67	12.38	1.06	15.47	12.78	0.97	16.26	13.17	0.85	650	17.02	13.56	0.71
	57 (13.9)		12.65	12.65	1.25	13.36	13.36	1.20	13.97	13.97	1.07	14.62	14.62	0.98	15.26	15.26	0.87				
	72 (22.2)		15.43	9.41	1.24	16.40	9.79	1.17	17.14	10.08	1.03	18.08	10.45	0.91	18.99	10.81	0.77				
	67 (19.4)		14.07	12.14	1.25	14.97	12.56	1.18	15.70	12.91	1.05	16.56	13.31	0.94	17.39	13.70	0.82				
	63 (17.2)		13.49	13.49	1.25	14.23	14.23	1.19	14.84	14.84	1.06	15.54	15.49	0.96	16.30	15.95	0.84				
80 (26.7)	57 (13.9)	650	13.47	13.47	1.25	14.20	14.20	1.19	14.81	14.81	1.06	15.50	15.50	0.96	16.17	16.17	0.85	650	17.05	16.38	0.71
	72 (22.2)		12.12	5.39	0.73	12.92	5.68	0.75	10.55	4.66	0.46	11.18	4.89	0.44	11.84	5.13	0.39				
	67 (19.4)		10.98	7.95	0.74	11.73	8.27	0.77	9.58	6.85	0.47	10.16	7.10	0.47	10.74	7.35	0.43				
	63 (17.2)		10.22	9.94	0.74	10.91	10.29	0.77	8.93	8.56	0.49	9.46	8.83	0.49	10.00	9.10	0.46				
	57 (13.9)		10.14	10.14	0.74	10.74	10.74	0.78	8.82	8.82	0.49	9.29	9.29	0.50	9.75	9.75	0.47				
80 (26.7)	72 (22.2)	650	11.99	7.94	0.73	12.79	8.25	0.75	10.41	6.81	0.46	11.06	7.06	0.44	11.73	7.32	0.38	585	12.41	7.59	0.28
	67 (19.4)		10.97	10.45	0.74	11.70	10.80	0.76	9.55	8.98	0.47	10.13	9.25	0.47	10.71	9.53	0.43				
	63 (17.2)		10.83	10.83	0.74	11.46	11.46	0.77	9.40	9.40	0.48	9.89	9.89	0.48	10.37	10.37	0.44				
	57 (13.9)		10.82	10.82	0.74	11.44	11.44	0.77	9.39	9.39	0.48	9.87	9.87	0.48	10.35	10.35	0.44				
	72 (22.2)		12.52	5.37	0.28	12.52	5.37	0.28	12.52	5.37	0.28	12.52	5.37	0.28	12.52	5.37	0.28				

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 — Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)		188BNV08E / FE4ANF05 Efficiency Mode Condenser Entering Air Temperature °F (°C)																													
		115 (46.1)					105 (40.5)					95 (35)					85 (29.4)					75 (23.9)					65 (18.3)				
		ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	Total Sys. KW**					
STAGE 5																															
75 (23.9)	72 (22.2)	34.24	14.18	4.44	3.89	1050	36.41	14.99	3.89	3.89	1050	38.29	15.70	3.36	3.36	1050	40.30	16.47	2.87	2.87	1050	42.28	17.24	2.41	2.41	1050	44.18	17.98	1.98	1.98	
	67 (19.4)	31.38	19.07	4.38	3.85		35.13	20.75	3.34	3.34		36.99	21.60	2.87	2.87		38.79	22.42	2.43	2.43		40.52	23.22	2.02	2.02						
	63 (17.2)	29.21	22.90	4.33	3.81		32.74	24.70	3.31	3.31		34.48	25.59	2.86	2.86		36.17	26.47	2.44	2.44		37.79	27.32	2.04	2.04						
	57 (13.9)	27.05	27.05	4.27	3.77		29.85	29.85	3.28	3.28		31.20	31.20	2.84	2.84		32.85	32.25	2.44	2.44		34.08	33.21	2.06	2.06						
	67 (19.4)	31.25	23.78	4.38	3.84		33.23	24.72	3.33	3.33		36.86	26.47	2.86	2.86		38.66	27.35	2.42	2.42		40.39	28.21	2.02	2.02						
80 (26.7)	72 (22.2)	34.04	18.92	4.44	3.88	1050	36.21	19.79	3.88	3.88	1050	38.09	20.56	3.35	3.35	1050	40.10	21.39	2.86	2.86	1050	42.08	22.22	2.41	2.41	1050	43.98	23.01	1.98	1.98	
	67 (19.4)	31.25	23.78	4.38	3.84		33.23	24.72	3.33	3.33		36.86	26.47	2.86	2.86		38.66	27.35	2.42	2.42		40.39	28.21	2.02	2.02						
	63 (17.2)	29.21	27.55	4.33	3.81		31.05	28.56	3.31	3.31		34.43	30.44	2.86	2.86		36.11	31.38	2.43	2.43		37.72	32.28	2.04	2.04						
	57 (13.9)	28.61	28.61	4.32	3.80		30.14	30.14	3.30	3.30		32.95	32.95	2.85	2.85		34.31	34.31	2.44	2.44		35.64	35.64	2.05	2.05						
	67 (19.4)	31.25	23.78	4.38	3.84		33.23	24.72	3.33	3.33		36.86	26.47	2.86	2.86		38.66	27.35	2.42	2.42		40.39	28.21	2.02	2.02						
STAGE 3																															
75 (23.9)	72 (22.2)	21.81	9.32	1.96	1.83	900	23.25	9.85	1.83	1.83	900	24.29	10.24	1.67	1.67	900	25.66	10.75	1.50	1.50	900	27.01	11.26	1.31	1.31	900	28.33	11.75	1.10	1.10	
	67 (19.4)	19.85	13.12	1.96	1.84		21.18	13.71	1.84	1.84		22.21	14.19	1.68	1.68		23.48	14.77	1.52	1.52		24.72	15.33	1.35	1.35						
	63 (17.2)	18.41	16.08	1.95	1.85		19.86	16.73	1.85	1.85		20.68	17.29	1.68	1.68		21.87	17.91	1.54	1.54		23.02	18.53	1.37	1.37						
	57 (13.9)	17.71	17.71	1.95	1.85		18.75	18.75	1.85	1.85		19.63	19.63	1.68	1.68		20.61	20.61	1.54	1.54		21.57	21.57	1.39	1.39						
	67 (19.4)	21.64	13.06	1.95	1.83		23.07	13.65	1.83	1.83		24.08	14.08	1.66	1.66		25.46	14.85	1.49	1.49		26.81	15.21	1.31	1.31						
80 (26.7)	72 (22.2)	18.86	18.86	1.95	1.84	900	19.85	19.95	1.84	1.84	900	20.82	20.82	1.68	1.68	900	21.94	21.87	1.53	1.53	900	23.07	22.38	1.37	1.37	900	24.19	23.06	1.19	1.19	
	67 (19.4)	19.77	16.83	1.95	1.84		21.09	17.48	1.84	1.84		22.11	18.01	1.67	1.67		23.37	18.64	1.52	1.52		24.60	19.26	1.35	1.35						
	63 (17.2)	18.86	18.86	1.95	1.84		19.85	19.95	1.84	1.84		20.82	20.82	1.68	1.68		21.94	21.87	1.53	1.53		23.07	22.38	1.37	1.37						
	57 (13.9)	18.83	18.83	1.95	1.84		19.91	19.91	1.84	1.84		20.79	20.79	1.68	1.68		21.82	21.82	1.53	1.53		22.82	22.82	1.37	1.37						
	67 (19.4)	21.64	13.06	1.95	1.83		23.07	13.65	1.83	1.83		24.08	14.08	1.66	1.66		25.46	14.85	1.49	1.49		26.81	15.21	1.31	1.31						
STAGE 1																															
75 (23.9)	72 (22.2)	14.74	6.58	0.98	1.00	800	15.80	6.96	1.00	1.00	800	10.82	4.81	0.48	0.48	800	11.57	5.09	0.46	0.46	800	12.38	5.38	0.39	0.39	800	13.21	5.69	0.27	0.27	
	67 (19.4)	13.36	9.71	0.98	1.02		14.34	10.16	1.02	1.02		9.83	7.10	0.49	0.49		10.52	7.42	0.44	0.44		11.24	7.76	0.34	0.34						
	63 (17.2)	12.47	12.13	0.98	1.03		13.37	12.65	1.03	1.03		9.17	8.88	0.51	0.51		9.81	9.25	0.47	0.47		10.45	9.62	0.38	0.38						
	57 (13.9)	12.37	12.37	0.98	1.03		13.18	13.18	1.03	1.03		9.09	9.09	0.51	0.51		9.86	9.66	0.52	0.52		10.22	10.22	0.40	0.40						
	67 (19.4)	14.58	9.69	0.97	1.00		15.63	10.12	1.00	1.00		10.67	7.06	0.47	0.47		11.46	7.39	0.46	0.46		12.27	7.73	0.39	0.39						
80 (26.7)	72 (22.2)	13.36	12.75	0.98	1.02	800	14.32	13.27	1.02	1.02	800	9.80	9.32	0.49	0.49	800	10.49	9.70	0.49	0.49	800	11.21	10.08	0.44	0.44	800	11.95	10.47	0.34	0.34	
	67 (19.4)	13.20	13.20	0.98	1.02		14.04	14.04	1.02	1.02		9.68	9.68	0.49	0.49		10.28	10.28	0.49	0.49		10.89	10.89	0.45	0.45						
	63 (17.2)	13.18	13.18	0.98	1.02		14.02	14.02	1.02	1.02		9.67	9.67	0.49	0.49		10.26	10.26	0.49	0.49		10.87	10.87	0.45	0.45						
	57 (13.9)	13.18	13.18	0.98	1.02		14.02	14.02	1.02	1.02		9.67	9.67	0.49	0.49		10.26	10.26	0.49	0.49		10.87	10.87	0.45	0.45						
	67 (19.4)	21.64	13.06	1.95	1.83		23.07	13.65	1.83	1.83		24.08	14.08	1.66	1.66		25.46	14.85	1.49	1.49		26.81	15.21	1.31	1.31						

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 — Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

189BNV036

Table with 6 columns: COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL. Rows include models like FE4AN(B,F)005L, FE4AN(B,F)003L, FE4AN(B,F)006L, FE4AN(B,F)002L, etc.

Table with 6 columns: COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL. Rows include models like FE4AN(B,F)005L, FE4AN(B,F)003L, FE4AN(B,F)006L, FE4AN(B,F)002L, etc.

Table with 6 columns: COOLING INDOOR MODEL, HIGH SPEED CAP., POWER, LOW SPEED CAP., POWER, FURNACE MODEL. Rows include models like CNPV*3617AL*, CNPV*4217AL*, CNPV*3612AL*, etc.

Table with 6 columns: COOLING INDOOR MODEL, HIGH SPEED CAP., POWER, LOW SPEED CAP., POWER, FURNACE MODEL. Rows include models like FV4CN(B,F)003L, FV4CNF002L, CAP**3614AL*, etc.

Table with 6 columns: COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL. Rows include models like CAP**4817AL*, CAP**3617AL*, CNPV*3617AL*, etc.

See notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVAP. AIR °F (°C)	115 (46.1)										105 (40.5)										95 (35)										85 (29.4)										75 (23.9)										65 (18.3)									
		Capacity MBtuh		ID SCFM	Total Sys. KW**	Capacity MBtuh		ID SCFM	Total Sys. KW**	Capacity MBtuh		ID SCFM	Total Sys. KW**	Capacity MBtuh		ID SCFM	Total Sys. KW**	Capacity MBtuh		ID SCFM	Total Sys. KW**	Capacity MBtuh		ID SCFM	Total Sys. KW**	Capacity MBtuh		ID SCFM	Total Sys. KW**	Capacity MBtuh		ID SCFM	Total Sys. KW**																												
		Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total	Sens†	Total											
75 (23.9)	72 (22.2)	32.70	13.63	3.49	1050	34.98	14.48	3.05	1050	37.03	15.26	2.59	1050	39.26	16.11	2.21	1050	41.44	16.95	1.86	1050	43.61	17.78	1.54																																					
	67 (19.4)	31.53	19.22	3.08		31.81	20.30	2.58		35.71	21.22	2.21		35.71	21.22	2.21		37.89	22.14	1.87		39.65	23.05	1.56																																					
	63 (17.2)	27.56	22.83	3.44		29.48	23.32	3.02		31.25	24.26	2.58		33.12	25.24	2.21		34.94	26.21	1.88		36.75	27.17	1.58																																					
	57 (13.9)	25.78	25.78	3.41		27.31	27.31	3.00		28.73	28.73	2.56		30.19	30.19	2.21		31.62	31.62	1.89		33.01	33.01	1.61																																					
	72 (22.2)	32.58	18.47	3.49		34.88	19.41	3.05		36.91	20.26	2.59		39.14	21.19	2.21		41.32	22.11	1.86		43.48	23.02	1.54																																					
80 (26.7)	67 (19.4)	31.43	24.01	3.08	1050	31.71	24.30	3.03	1050	33.60	25.24	2.58	1050	35.61	26.24	2.21	1050	37.59	27.23	1.87	1050	39.55	28.22	1.56																																					
	63 (17.2)	27.61	27.02	3.44		29.49	28.13	3.02		31.23	29.15	2.58		33.10	30.22	2.21		34.91	31.27	1.88		36.70	32.31	1.58																																					
	57 (13.9)	27.36	27.36	3.44		28.98	28.98	3.01		30.45	30.45	2.57		32.00	32.00	2.21		33.49	33.49	1.89		34.96	34.96	1.59																																					
	72 (22.2)	22.96	9.72	2.41		24.70	10.37	2.11		26.36	10.99	1.76		28.08	11.65	1.50		29.77	12.29	1.25		31.45	12.83	1.03																																					
	67 (19.4)	20.81	13.49	2.42		22.39	14.22	2.13		23.90	14.93	1.79		25.43	15.65	1.54		26.95	16.37	1.30		28.46	17.09	1.08																																					
75 (23.9)	63 (17.2)	19.24	16.44	2.42	900	20.68	17.23	2.14	900	22.09	18.01	1.80	900	23.50	18.79	1.56	900	24.89	19.57	1.34	900	26.28	20.35	1.13																																					
	57 (13.9)	18.34	18.34	2.42		19.54	19.54	2.15		20.70	20.70	1.82		21.85	21.85	1.58		22.98	22.98	1.37		24.10	24.10	1.17																																					
	72 (22.2)	22.86	13.49	2.41		24.60	14.23	2.11		26.26	14.93	1.76		27.98	15.67	1.50		29.67	16.39	1.25		31.35	17.12	1.03																																					
	67 (19.4)	20.74	17.22	2.42		22.31	18.03	2.13		23.83	18.82	1.79		25.36	19.62	1.54		26.87	20.42	1.30		28.38	21.22	1.08																																					
	57 (13.9)	19.57	19.57	2.42		20.83	20.83	2.14		22.16	21.83	1.80		23.54	22.72	1.56		24.92	23.58	1.33		26.29	24.45	1.12																																					
80 (26.7)	72 (22.2)	19.53	19.53	2.42	800	20.79	20.79	2.14	800	22.01	22.01	1.80	800	23.22	23.22	1.56	800	24.42	24.42	1.34	800	25.59	25.59	1.14																																					
	67 (19.4)	18.16	7.73	1.96		19.62	8.28	1.73		21.04	8.28	0.87		22.88	8.55	0.72		24.72	8.55	0.57		26.39	8.55	0.43																																					
	63 (17.2)	16.42	10.82	1.98		17.74	11.45	1.76		19.06	12.08	1.51		20.37	12.71	1.25		21.68	13.34	0.96		23.00	13.99	0.71																																					
	57 (13.9)	15.19	13.25	1.99		16.40	13.94	1.77		17.62	14.57	1.54		18.84	15.24	1.25		20.07	15.91	0.96		21.40	16.58	0.71																																					
	72 (22.2)	14.59	14.59	1.99		15.61	15.61	1.78		16.73	16.73	1.54		17.85	17.85	1.25		18.97	18.97	0.96		20.10	20.10	0.71																																					
75 (23.9)	67 (19.4)	18.08	10.84	1.96	800	19.54	11.47	1.73	800	20.79	12.10	1.51	800	22.04	12.73	1.25	800	23.29	13.36	0.96	800	24.54	13.99	0.71																																					
	63 (17.2)	16.38	13.89	1.98		17.69	14.60	1.75		18.94	15.23	1.51		20.19	15.86	1.25		21.44	16.49	0.96		22.69	17.12	0.71																																					
	57 (13.9)	15.57	15.57	1.99		16.66	16.66	1.77		17.81	17.81	1.54		18.96	18.96	1.25		20.11	20.11	0.96		21.36	21.36	0.71																																					
	72 (22.2)	15.54	15.54	1.99		16.63	16.63	1.77		17.78	17.78	1.54		18.93	18.93	1.25		20.08	20.08	0.96		21.33	21.33	0.71																																					
	67 (19.4)	15.54	15.54	1.99		16.63	16.63	1.77		17.78	17.78	1.54		18.93	18.93	1.25		20.08	20.08	0.96		21.33	21.33	0.71																																					

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 – Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

189BNV087

COOLING IN-DOOR MODEL	FURNACE MODEL	CAPACITY	POWER	COOLING IN-DOOR MODEL	FURNACE MODEL	CAPACITY	POWER	COOLING IN-DOOR MODEL	FURNACE MODEL	CAPACITY	POWER
FE4ANB006L	98(6*B,7*A)J42060V17***	1.00	1.00	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.96	1.03	CNPH*4221AL*	98(6*B,7*A)J60080V21***	0.98	1.02
FE4AN(B,F)005L	98(6*B,7*A)J42060V17***	0.99	1.03	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.96	1.03	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.99	0.99
CAP**3614AL*	315(A,J)AV036070	0.01	0.15	CNPH*4221AL*	98(6*B,7*A)J60080V21***	0.96	1.03	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.99	0.99
CAP**3617AL*	98(6*B,7*A)J42060V17***	0.01	0.15	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.96	1.05	CNPH*3612AL*	98(6*B,7*A)J42060V17***	0.99	0.99
CAP**3617AL*	98(6*B,7*A)J42060V17***	0.01	0.15	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.99	1.05	CSPH*3612AL*	98(6*B,7*A)J42060V17***	0.01	0.15
CAP**3617AL*	315(A,J)AV036070	0.95	1.01	CNPH*4221AL*	98(6*B,7*A)J60080V21***	0.99	1.05	CSPH*3612AL*	98(6*B,7*A)J60080V21***	0.97	1.03
CAP**3617AL*	315(A,J)AV048090	0.96	1.00	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.99	1.05	CSPH*3612AL*	98(6*B,7*A)J42060V17***	1.00	1.03
CAP**3621AL*	98(6*B,7*A)J42060V17***	0.01	0.15	CNPH*4221AL*	98(6*B,7*A)J60080V21***	0.99	1.03	CSPH*3612AL*	98(6*B,7*A)J60080V21***	0.98	1.04
CAP**3621AL*	98(6*B,7*A)J42060V17***	0.01	0.15	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.99	1.03	CSPH*3612AL*	98(6*B,7*A)J42060V17***	0.98	1.04
CAP**3621AL*	98(6*B,7*A)J42060V17***	0.96	1.02	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.99	1.03	CSPH*3612AL*	98(6*B,7*A)J42060V17***	0.98	1.04
CAP**3621AL*	98(6*B,7*A)J42060V17***	0.96	1.02	CNPH*4221AL*	98(6*B,7*A)J60080V21***	0.01	0.15	CSPH*3612AL*	98(6*B,7*A)J60080V21***	0.98	1.02
CAP**3621AL*	315(A,J)AV048090	1.00	1.00	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.98	1.04	CSPH*3612AL*	98(6*B,7*A)J42060V17***	0.98	1.02
CAP**3621AL*	315(A,J)AV066155	0.97	1.00	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.98	1.02	CSPH*3612AL*	98(6*B,7*A)J42060V17***	0.98	1.02
CAP**4221AL*	98(6*B,7*A)J42060V17***	0.97	1.03	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.99	1.03	CSPH*4212AL*	98(6*B,7*A)J42060V17***	0.98	1.02
CAP**4221AL*	98(6*B,7*A)J42060V17***	0.97	1.01	CNPH*4221AL*	98(6*B,7*A)J60080V21***	0.99	1.03	CSPH*4212AL*	98(6*B,7*A)J60080V21***	0.98	1.02
CAP**4221AL*	98(6*B,7*A)J42060V17***	0.97	1.01	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.99	1.03	CSPH*4212AL*	98(6*B,7*A)J42060V17***	0.98	1.02
CAP**4221AL*	98(6*B,7*A)J42060V17***	0.96	1.03	CNPH*4221AL*	98(6*B,7*A)J60080V21***	0.99	1.03	CSPH*4212AL*	98(6*B,7*A)J60080V21***	0.98	1.02
CAP**4221AL*	98(6*B,7*A)J42060V17***	0.96	1.00	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.99	1.03	CSPH*4212AL*	98(6*B,7*A)J42060V17***	0.98	1.02
CAP**4221AL*	98(6*B,7*A)J42060V17***	0.96	1.00	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.99	1.03	CSPH*4212AL*	98(6*B,7*A)J42060V17***	0.98	1.02
CAP**4221AL*	315(A,J)AV066135	0.96	1.00	CNPH*4221AL*	98(6*B,7*A)J60080V21***	0.01	0.15	CSPH*4212AL*	98(6*B,7*A)J60080V21***	0.01	0.15
CAP**4221AL*	315(A,J)AV066155	0.97	1.01	CNPH*4221AL*	98(6*B,7*A)J42060V17***	0.95	1.03	CSPH*4212AL*	98(6*B,7*A)J42060V17***	0.98	1.05
CAP**4817AL*	98(6*B,7*A)J42060V17***	0.01	0.15	CNPH*3821AL*	98(6*B,7*A)J42060V17***	0.01	0.15	CSPH*4812AL*	98(6*B,7*A)J42060V17***	0.98	1.05
CAP**4817AL*	98(6*B,7*A)J42060V17***	0.98	1.04	CNPH*3821AL*	98(6*B,7*A)J60080V21***	0.01	0.15	CSPH*4812AL*	98(6*B,7*A)J60080V21***	0.98	1.05
CAP**4817AL*	98(6*B,7*A)J42060V17***	0.98	1.02	CNPH*3821AL*	98(6*B,7*A)J42060V17***	0.01	0.15	CSPH*4812AL*	98(6*B,7*A)J42060V17***	0.99	1.03
CAP**4817AL*	98(6*B,7*A)J42060V17***	0.98	1.02	CNPH*3821AL*	98(6*B,7*A)J60080V21***	0.95	1.01	CSPH*4812AL*	98(6*B,7*A)J60080V21***	0.99	1.03
CAP**4817AL*	315(A,J)AV048090	0.01	0.15	CNPH*3821AL*	98(6*B,7*A)J42060V17***	0.96	1.02	CSPH*6012AL*	98(6*B,7*A)J42060V17***	0.99	1.05
CAP**4817AL*	315(A,J)AV066155	0.01	0.15	CNPH*3821AL*	98(6*B,7*A)J60080V21***	0.96	1.02	CSPH*6012AL*	98(6*B,7*A)J60080V21***	0.99	1.05
CAP**4824AL*	98(6*B,7*A)J42060V17***	0.97	1.03	CNPH*3821AL*	98(6*B,7*A)J42060V17***	0.96	1.02	CSPH*6012AL*	98(6*B,7*A)J42060V17***	0.99	1.03
CAP**4824AL*	98(6*B,7*A)J42060V17***	0.97	1.03	CNPH*3821AL*	98(6*B,7*A)J60080V21***	0.01	0.15	CSPH*6012AL*	98(6*B,7*A)J60080V21***	0.99	1.03
CAP**4824AL*	98(6*B,7*A)J42060V17***	0.98	1.02	CNPH*3821AL*	98(6*B,7*A)J42060V17***	0.98	1.05	CSPH*6012AL*	98(6*B,7*A)J42060V17***	0.99	1.03
CAP**4824AL*	98(6*B,7*A)J42060V17***	0.98	1.02	CNPH*3821AL*	98(6*B,7*A)J60080V21***	0.98	1.05	CSPH*6012AL*	98(6*B,7*A)J60080V21***	0.99	1.03
CAP**4824AL*	315(A,J)AV066110	0.98	1.02	CNPH*3821AL*	98(6*B,7*A)J42060V17***	0.98	1.02	CSPH*6012AL*	98(6*B,7*A)J42060V17***	0.99	1.03
CAP**4824AL*	315(A,J)AV066135	0.98	1.02	CNPH*3821AL*	98(6*B,7*A)J60080V21***	0.01	0.15	CSPH*6012AL*	98(6*B,7*A)J60080V21***	0.99	1.03
CAP**4824AL*	315(A,J)AV066155	0.98	1.02	CNPH*3821AL*	98(6*B,7*A)J42060V17***	0.98	1.05	CSPH*6012AL*	98(6*B,7*A)J42060V17***	0.99	1.03
CAP**4824AL*	98(6*B,7*A)J42060V17***	0.97	1.03	CNPH*4212AL*	98(6*B,7*A)J42060V17***	0.01	0.15	CSPH*6012AL*	98(6*B,7*A)J42060V17***	0.99	1.03
CAP**4824AL*	98(6*B,7*A)J42060V17***	0.97	1.03	CNPH*4212AL*	98(6*B,7*A)J60080V21***	0.01	0.15	CSPH*6012AL*	98(6*B,7*A)J60080V21***	0.99	1.03
CAP**4824AL*	98(6*B,7*A)J42060V17***	0.98	1.02	CNPH*4212AL*	98(6*B,7*A)J42060V17***	0.97	1.03	CSPH*6012AL*	98(6*B,7*A)J42060V17***	0.99	1.03
CAP**4824AL*	98(6*B,7*A)J42060V17***	0.98	1.02	CNPH*4212AL*	98(6*B,7*A)J60080V21***	0.97	1.03	CSPH*6012AL*	98(6*B,7*A)J60080V21***	0.99	1.03
CAP**4824AL*	315(A,J)AV066110	0.98	1.02	CNPH*4212AL*	98(6*B,7*A)J42060V17***	0.98	1.05	CSPH*6012AL*	98(6*B,7*A)J42060V17***	1.00	1.00
CAP**4824AL*	315(A,J)AV066135	0.98	1.02	CNPH*4212AL*	98(6*B,7*A)J60080V21***	0.98	1.05	CSPH*6012AL*	98(6*B,7*A)J60080V21***	1.00	1.00
CAP**4824AL*	315(A,J)AV066155	0.98	1.02	CNPH*4212AL*	98(6*B,7*A)J42060V17***	0.98	1.05	CSPH*6012AL*	98(6*B,7*A)J42060V17***	1.00	1.00
CAP**4824AL*	98(6*B,7*A)J42060V17***	0.98	1.02	CNPH*4212AL*	98(6*B,7*A)J60080V21***	0.98	1.05	CSPH*6012AL*	98(6*B,7*A)J60080V21***	1.00	1.00

2-STAGE (HI-Stage 5, Lo-Stage 2)

Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model
FE4ANB006L	1.00	1.00	1.00	1.00	98(6*B,7*A)J60080V21***
FE4AN(B,F)003L	0.96	0.99	0.98	1.08	315(A,J)AV060110
FE4AN(B,F)005L	0.99	0.98	0.99	1.03	315(A,J)AV066135
FE4ANF002L	0.95	1.02	0.98	1.14	315(A,J)AV066155
FE5ANB004L	1.01	1.00	1.01	1.01	98(6*B,7*A)J60080V21***
FV4CN(B,F)003L	0.96	0.99	0.98	1.06	98(6*B,7*A)J42060V17***
FV4CN(B,F)005L	0.99	0.98	0.99	1.03	98(6*B,7*A)J60080V21***
FV4CN(B)002L	0.95	1.02	0.98	1.12	98(6*B,7*A)J42060V17***
FV4CNB006L	0.97	1.03	0.97	1.07	98(6*B,7*A)J60080V21***
CSPH*3612AL*	0.97	1.03	0.97	1.07	314AAV036045
CSPH*4212AL*	0.98	1.03	0.98	1.07	314AAV036045

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVAR AIR °F (°C)	189BNV048 / FE4BN806 Efficiency Mode Condenser Entering Air Temperature F (°C)																							
		115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCFM	Capacity MBtuh Total	Sens†	Total Syst. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Syst. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Syst. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Syst. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Syst. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Syst. KW**
75 (23.9)	72 (22.2)	1400	44.82	18.57	5.52	47.96	19.76	4.88	50.99	20.91	4.29	53.98	22.06	3.74	56.89	23.19	3.23	59.70	24.29	2.75	1400	54.60	31.27	2.75	
	67 (19.4)	1400	40.99	24.95	5.42	43.86	26.26	4.80	46.65	27.54	4.23	49.36	28.80	3.70	52.01	30.04	3.21	54.60	31.27	2.75	1400	50.78	36.72	2.74	
	63 (17.2)	1400	38.13	29.97	5.34	40.79	31.36	4.74	43.37	32.72	4.18	45.91	34.07	3.67	48.37	35.40	3.19	50.78	36.72	2.74	1400	45.70	44.59	2.73	
	57 (13.9)	1400	35.29	35.29	5.26	37.41	37.41	4.66	39.46	39.46	4.12	41.45	41.45	3.62	43.58	43.09	3.16	45.70	44.59	2.73	1400	59.48	31.07	2.75	
	72 (22.2)	1400	44.60	24.79	5.51	47.74	26.09	4.88	50.77	27.36	4.28	53.76	28.82	3.73	56.66	29.86	3.22	59.48	31.07	2.75	1400	54.45	37.98	2.75	
80 (26.7)	67 (19.4)	1400	40.84	31.14	5.42	43.71	32.55	4.80	46.50	33.94	4.23	49.21	35.31	3.70	51.86	36.65	3.20	54.45	37.98	2.75	1400	50.70	43.40	2.74	
	63 (17.2)	1400	38.13	36.06	5.34	40.76	37.59	4.74	43.33	39.07	4.18	45.84	40.54	3.67	48.30	41.98	3.18	50.70	43.40	2.74	1400	47.82	47.82	2.73	
	57 (13.9)	1400	37.36	37.36	5.32	39.59	39.59	4.72	41.72	41.72	4.16	43.81	43.81	3.64	45.84	45.84	3.17	47.82	47.82	2.73	1400	39.85	16.55	1.49	
	72 (22.2)	1200	29.42	12.62	2.82	31.80	13.43	2.56	33.63	14.20	2.26	35.75	15.00	2.00	37.82	15.78	1.74	39.85	16.55	1.49	1200	36.44	22.40	1.52	
	67 (19.4)	1200	26.82	17.86	2.80	28.83	18.79	2.56	30.73	19.68	2.27	32.66	20.60	2.02	34.57	21.50	1.77	36.44	22.40	1.52	1200	33.91	26.99	1.55	
80 (26.7)	63 (17.2)	1200	24.03	24.03	2.78	25.61	25.61	2.55	27.12	27.12	2.26	28.62	28.62	2.03	30.11	30.11	1.80	31.55	31.55	1.57	1200	31.55	31.55	1.57	
	57 (13.9)	1200	29.22	17.78	2.81	31.39	16.70	2.55	33.41	19.57	2.25	35.52	20.47	2.00	37.60	21.37	1.74	39.62	22.25	1.48	1200	36.30	28.05	1.52	
	72 (22.2)	1200	26.71	22.96	2.80	28.71	24.01	2.56	30.60	25.01	2.26	32.52	26.03	2.01	34.42	27.05	1.77	36.30	28.05	1.52	1200	33.93	32.55	1.55	
	63 (17.2)	1200	25.56	25.56	2.80	27.23	27.23	2.55	28.80	28.80	2.26	30.48	30.24	2.02	32.21	31.42	1.78	33.93	32.55	1.55	1200	33.43	33.43	1.55	
	57 (13.9)	1200	25.52	25.52	2.80	27.19	27.19	2.55	28.76	28.76	2.26	30.35	30.35	2.02	31.90	31.90	1.78	33.43	33.43	1.55	1200	23.61	10.07	0.57	
75 (23.9)	72 (22.2)	1100	25.50	10.99	2.21	27.46	11.73	2.07	19.62	8.56	0.95	20.96	9.06	0.84	22.29	9.57	0.72	23.61	10.07	0.57	875	21.53	14.21	0.62	
	67 (19.4)	1100	23.22	15.65	2.21	25.04	16.51	2.08	17.88	12.38	0.98	19.11	12.99	0.88	20.32	13.60	0.76	21.53	14.21	0.62	875	20.07	17.46	0.66	
	63 (17.2)	1100	21.57	19.30	2.21	23.24	20.26	2.08	16.68	15.37	1.00	17.82	16.07	0.90	18.95	16.77	0.79	20.07	17.46	0.66	875	19.33	19.33	0.68	
	57 (13.9)	1100	20.89	20.89	2.20	22.32	22.32	2.08	16.33	16.33	1.00	17.34	17.34	0.91	18.34	18.34	0.81	19.33	19.33	0.68	875	23.43	14.14	0.57	
	72 (22.2)	1100	25.31	15.59	2.21	27.26	16.44	2.06	19.42	12.31	0.95	20.76	12.92	0.84	22.09	13.52	0.71	23.43	14.14	0.57	875	21.44	18.21	0.62	
80 (26.7)	67 (19.4)	1100	23.13	20.20	2.21	24.93	21.18	2.07	17.82	16.09	0.98	19.04	16.80	0.88	20.25	17.51	0.76	21.44	18.21	0.62	875	20.50	20.50	0.65	
	63 (17.2)	1100	22.25	22.25	2.21	23.77	23.77	2.08	17.35	17.35	0.98	18.41	18.41	0.89	19.46	19.46	0.78	20.50	20.50	0.65	875	19.43	19.43	0.65	
	57 (13.9)	1100	22.21	22.21	2.21	23.73	23.73	2.08	17.32	17.32	0.98	18.39	18.39	0.89	19.43	19.43	0.78	20.47	20.47	0.65	875	20.47	20.47	0.65	

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 – Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVAP AIR	188BNV049 / °C/NP/602AL* Efficiency Mode Condenser Entering Air Temperature F (°C)																			
		115 (46.1)			105 (40.5)			95 (35)			85 (29.4)			75 (23.9)			65 (18.3)				
		ID SCFM	Capacity MBtuh		ID SCFM	Capacity MBtuh		ID SCFM	Capacity MBtuh		ID SCFM	Capacity MBtuh		ID SCFM	Capacity MBtuh		ID SCFM	Capacity MBtuh			
			Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		Total	Sens†		
Total Sys. KW**		Total Sys. KW**		Total Sys. KW**		Total Sys. KW**		Total Sys. KW**		Total Sys. KW**		Total Sys. KW**		Total Sys. KW**		Total Sys. KW**					
75 (23.9)	72 (22.2)		45.15	18.59	4.64		47.22	19.34	4.10		49.13	20.04	3.62		50.85	20.69	3.20		52.44	21.29	2.83
	67 (19.4)		40.99	24.58	4.57		42.88	25.28	4.03		44.59	25.92	3.56		46.15	26.50	3.14		47.59	27.05	2.77
	63 (17.2)	1200	37.94	29.29	4.53		39.87	29.93	3.99		41.26	30.52	3.52	1200	42.70	31.05	3.10		44.02	31.54	2.74
	57 (13.9)		34.94	34.94	4.48		36.17	36.17	3.94		37.25	37.25	3.47		38.39	37.79	3.05		39.47	38.20	2.89
	67 (19.4)		45.05	24.59	4.65		47.12	25.29	4.10		49.03	25.93	3.62		50.75	26.52	3.20		52.34	27.07	2.83
80 (26.7)	72 (22.2)		40.90	30.52	4.57		42.79	31.16	4.03		44.50	31.73	3.56		46.06	32.26	3.14		47.51	32.74	2.77
	67 (19.4)	1200	38.05	35.23	4.53		39.74	35.81	3.99		41.31	36.35	3.52	1200	42.73	36.82	3.10		44.03	37.24	2.74
	63 (17.2)		37.10	37.10	4.51		38.37	38.37	3.97		39.51	39.51	3.50		40.51	40.51	3.08		41.42	41.42	2.71
	57 (13.9)		31.12	13.04	2.69		33.04	13.72	2.42		34.76	14.34	2.13		36.52	14.98	1.89		38.19	15.60	1.67
	67 (19.4)	1100	27.98	17.71	2.68		29.74	18.37	2.42		31.35	18.98	2.12	1100	32.83	19.80	1.88		34.47	20.20	1.67
80 (26.7)	72 (22.2)		25.70	21.37	2.67		27.30	22.01	2.41		28.81	22.61	2.11		30.27	23.20	1.88		31.66	23.76	1.67
	67 (19.4)		24.22	24.22	2.66		25.43	25.43	2.41		26.54	26.54	2.11		27.60	27.60	1.88		28.59	28.59	1.67
	63 (17.2)	1100	31.03	17.82	2.69		32.96	18.48	2.42		34.67	19.07	2.13		36.43	19.69	1.89		38.11	20.29	1.67
	57 (13.9)		27.94	22.44	2.68		29.89	23.08	2.42		31.28	23.67	2.12		32.86	24.25	1.88		34.39	24.83	1.67
	67 (19.4)	1100	25.99	25.99	2.67		27.49	26.68	2.41		28.94	27.28	2.11	1100	30.37	27.85	1.88		31.74	28.40	1.67
75 (23.9)	72 (22.2)		24.22	10.36	1.81		26.07	11.01	1.70		27.20	11.70	1.51		28.35	12.35	1.31		29.45	13.00	1.11
	67 (19.4)		21.60	14.43	1.81		23.29	15.08	1.71		24.44	15.73	1.51		25.45	16.38	1.31		26.47	17.03	1.11
	63 (17.2)	1100	19.74	17.61	1.80		21.27	18.26	1.71		22.42	18.91	1.51	875	23.23	19.56	1.31		24.37	20.16	1.11
	57 (13.9)		19.08	19.08	1.80		20.28	20.28	1.71		21.50	21.50	1.51		22.71	22.71	1.31		23.92	23.92	1.11
	67 (19.4)		24.14	14.58	1.81		25.99	15.23	1.70		27.20	15.88	1.51		28.35	16.53	1.31		29.45	17.18	1.11
80 (26.7)	72 (22.2)		21.61	18.61	1.81		23.27	19.26	1.71		24.47	19.85	1.51		25.48	20.50	1.31		26.49	21.15	1.11
	67 (19.4)	1100	20.60	20.60	1.80		21.86	21.86	1.71		23.12	23.12	1.51	875	24.37	24.37	1.31		26.47	26.47	1.11
	63 (17.2)		20.56	20.56	1.80		21.82	21.82	1.71		23.07	23.07	1.51		24.28	24.28	1.31		25.49	25.49	1.11
	57 (13.9)		24.22	10.36	1.81		26.07	11.01	1.70		27.20	11.70	1.51		28.35	12.35	1.31		29.45	13.00	1.11
	67 (19.4)	1100	21.60	14.43	1.81		23.29	15.08	1.71		24.44	15.73	1.51	875	25.45	16.38	1.31		26.47	17.03	1.11

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 — Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

189BNV049

COOLING IN-DOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*CNPV*6024AL*	1.00	1.00	315(A-JJA)V066135
FE4AN(B,F)005L	0.99	0.99	
FE4AN(B)006L	1.00	1.00	
CAP**4821AL*	0.97	1.03	98(6*B,7*A)60080V21***
CAP**4824AL*	0.98	1.00	98(6*B,7*A)60080V21***
CAP**4824AL*	0.98	1.00	98(6*B,7*A)66120V24***
CAP**4824AL*	0.98	1.00	315(A-JJA)V060110
CAP**4824AL*	0.98	0.98	315(A-JJA)V066135
CAP**4824AL*	0.98	0.98	315(A-JJA)V066155
CAP**6021AL*	1.00	1.00	315(A-JJA)V048090
CAP**6021AL*	0.99	1.06	98(6*B,7*A)60080V21***
CAP**6024AL*	1.00	1.00	98(6*B,7*A)60080V21***
CAP**6024AL*	1.00	1.00	98(6*B,7*A)66120V24***
CAP**6024AL*	1.00	1.00	315(A-JJA)V060110
CAP**6024AL*	1.00	1.00	315(A-JJA)V066135
CAP**6024AL*	1.00	1.00	315(A-JJA)V066155
CNPV*4821AL*	1.00	1.04	98(6*B,7*A)60080V21***
CNPV*4821AL*	0.99	0.99	98(6*B,7*A)60080V21***
CNPV*6024AL*	1.00	1.00	98(6*B,7*A)66120V24***
CNPV*6024AL*	1.00	1.00	98(6*B,7*A)66120V24***
CNPV*6024AL*	1.00	1.00	315(A-JJA)V060110
CNPV*6124AL*	1.00	1.00	98(6*B,7*A)60080V21***
CNPV*6124AL*	1.01	1.01	98(6*B,7*A)66120V24***
CNPV*6124AL*	1.01	0.97	315(A-JJA)V066135
CNPV*6124AL*	1.01	0.97	315(A-JJA)V066155

2-STAGE (Hi-Stage 5, Lo-Stage 2)						
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model	
*CNPV*6024AL*	1.00	1.00	1.00	1.00	315(A-JJA)V066155	
FE4AN(B,F)005L	0.99	0.99	1.00	1.02		
FE4AN(B)006L	1.01	0.99	1.01	0.99		
FV4CN(B,F)005L	1.00	0.99	1.00	1.02		
FV4CN(B)006L	1.01	0.99	1.01	0.99		
CAP**4821AL*	0.97	0.99	0.98	1.05	313*AV048090	
CAP**6021AL*	1.00	1.03	1.00	1.04	313*AV048090	
CNPV*4821AL*	0.98	1.02	0.99	1.05	313*AV048090	
CNPV*4821AL*	0.98	1.01	0.99	1.05	313*AV048090	
CSPH*4812AL*	0.98	1.00	0.99	1.05	313*AV048090	
CSPH*6012AL*	1.00	1.03	1.01	1.04	313*AV048090	
CAP**4821AL*	0.97	0.99	0.98	1.04	313*AV060110	
CAP**6021AL*	1.00	0.98	1.00	1.04	313*AV060110	
CNPV*4821AL*	0.98	1.00	0.99	1.04	313*AV060110	
CNPV*4821AL*	0.98	1.00	0.99	1.04	313*AV060110	
CSPH*4812AL*	0.98	1.00	1.00	1.05	313*AV060110	
CSPH*6012AL*	1.00	0.98	1.01	1.04	313*AV060110	
CAP**4821AL*	0.97	0.99	0.98	1.04	314*AAV048090	
CAP**6021AL*	1.00	1.03	0.99	1.03	314*AAV048090	
CNPV*4821AL*	0.98	1.01	0.98	1.03	314*AAV048090	
CNPV*4821AL*	0.98	1.00	0.98	1.03	314*AAV048090	
CSPH*4812AL*	0.99	1.01	0.99	1.04	314*AAV048090	
CSPH*6012AL*	1.00	1.03	1.00	1.03	314*AAV048090	
CAP**4821AL*	0.98	1.00	0.98	1.02	314*AAV066110	
CAP**6021AL*	1.00	1.03	1.00	1.02	314*AAV066110	
CNPV*4821AL*	0.98	1.00	0.99	1.02	314*AAV066110	
CNPV*4821AL*	0.98	1.00	0.99	1.02	314*AAV066110	
CSPH*4812AL*	0.99	1.01	0.99	1.02	314*AAV066110	
CSPH*6012AL*	1.01	0.99	1.01	1.02	314*AAV066110	
CAP**4824AL*	0.98	1.00	0.98	1.02	314*AAV066135	
CAP**6024AL*	1.00	0.98	0.99	1.01	314*AAV066135	
CNPV*6124AL*	1.00	1.00	1.00	1.01	314*AAV066135	
CNPV*4824AL*	1.00	1.00	1.00	1.02	314*AAV066135	
CNPV*4824AL*	1.00	0.99	1.00	1.01	314*AAV066135	
CNPV*6124AL*	1.01	0.99	1.02	1.01	314*AAV066135	
CNPV*4812AL*	0.99	1.01	0.99	1.02	314*AAV066135	
CSPH*6012AL*	1.00	0.98	1.01	1.02	314*AAV066135	
CAP**4817AL*	0.98	1.00	0.98	1.05	922*A48080E17***	
CSPH*6012AL*	1.00	1.03	1.00	1.05	922*A48080E17***	
CAP**4821AL*	0.98	1.00	0.98	1.03	922*A60080E21***	
CAP**6021AL*	1.00	1.03	0.99	1.02	922*A60080E21***	
CNPV*4821AL*	0.98	1.00	0.98	1.02	922*A60080E21***	
CNPV*4821AL*	0.98	1.00	0.98	1.02	922*A60080E21***	
CSPH*4812AL*	0.99	1.01	0.99	1.03	922*A60080E21***	
CSPH*6012AL*	1.01	1.00	1.00	1.01	922*A60080E21***	
CAP**4821AL*	0.98	1.00	0.98	1.03	922*A60100E21***	
CAP**6021AL*	1.00	1.03	0.99	1.02	922*A60100E21***	
CNPV*4821AL*	0.98	1.00	0.98	1.02	922*A60100E21***	
CNPV*4821AL*	0.98	1.00	0.98	1.02	922*A60100E21***	
CSPH*4812AL*	0.99	1.01	0.99	1.03	922*A60100E21***	
CSPH*6012AL*	1.01	1.00	1.00	1.01	922*A60100E21***	

2-STAGE (Hi-Stage 5, Lo-Stage 2)						
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model	
CAP**4824AL*	0.98	1.00	0.98	1.03	922*A60120E24***	
CAP**6024AL*	1.00	1.03	0.99	1.02	922*A60120E24***	
CNPV*6024AL*	1.00	1.03	1.00	1.02	922*A60120E24***	
CNPV*4824AL*	0.98	1.00	0.98	1.02	922*A60120E24***	
CNPV*6024AL*	1.00	1.03	1.00	1.02	922*A60120E24***	
CNPV*6124AL*	1.01	1.00	1.01	1.02	922*A60120E24***	
CNPV*6124AL*	1.01	1.00	1.01	1.02	922*A60120E24***	
CSPH*4812AL*	0.98	1.01	0.99	1.03	922*A60120E24***	
CSPH*6012AL*	1.01	1.04	1.00	1.02	922*A60120E24***	
CAP**4821AL*	0.97	0.99	0.96	1.01	925*A60080E21***	
CAP**4821AL*	0.97	0.99	0.99	1.10	925*A60100E21***	
CSPH*4812AL*	0.98	1.00	1.00	1.10	925*A60100E21***	
CAP**4821AL*	0.97	0.99	0.98	1.07	926*A60080V21***	
CAP**6021AL*	0.99	1.01	1.00	1.07	926*A60080V21***	
CNPV*4821AL*	0.98	1.01	0.99	1.07	926*A60080V21***	
CNPV*4821AL*	0.98	1.00	0.99	1.07	926*A60080V21***	
CSPH*4812AL*	0.98	1.00	0.99	1.07	926*A60080V21***	
CSPH*6012AL*	1.00	1.03	1.01	1.07	926*A60080V21***	
CAP**4821AL*	0.97	0.99	0.98	1.06	926*A60100V21***	
CAP**6021AL*	0.99	1.01	1.00	1.06	926*A60100V21***	
CNPV*4821AL*	0.98	1.00	0.99	1.06	926*A60100V21***	
CNPV*4821AL*	0.98	1.00	0.99	1.06	926*A60100V21***	
CSPH*4812AL*	0.98	1.00	1.00	1.09	926*A60100V21***	
CSPH*6012AL*	1.00	1.03	1.01	1.06	926*A60100V21***	
CAP**4824AL*	0.97	0.99	0.98	1.05	926*A66120V24***	
CNPV*6024AL*	0.99	1.01	1.01	1.06	926*A66120V24***	
CNPV*4824AL*	0.98	1.00	0.99	1.06	926*A66120V24***	
CNPV*6024AL*	0.99	1.01	1.01	1.06	926*A66120V24***	
CNPV*6124AL*	1.01	1.04	1.02	1.05	926*A66120V24***	
CNPV*6124AL*	1.01	1.04	1.02	1.05	926*A66120V24***	
CSPH*4812AL*	0.98	1.00	1.00	1.11	926*A66120V24***	
CSPH*6012AL*	1.00	1.03	1.01	1.06	926*A66120V24***	

See notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVAR. AIR °F (°C)	189BNV060 / FE4BNB06L Efficiency Mode Condenser Entering Air Temperature F (°C)																							
		115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCFM	Capacity MBtuh Total	Sens†	Total Svs. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Svs. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Svs. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Svs. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Svs. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Svs. KW**
75 (23.9)	72 (22.2)	1600	55.38	22.79	7.70	59.00	24.17	6.73	62.54	25.53	5.88	65.96	26.86	5.13	69.30	28.16	4.47	1600	66.21	37.38	3.75	72.59	29.46	3.89	
	67 (19.4)	1600	50.63	30.18	7.50	53.95	31.68	6.54	57.12	33.14	5.70	60.22	34.57	4.96	63.25	35.99	4.32	1600	61.52	43.58	3.65	66.21	37.38	3.75	
	63 (17.2)	1600	47.11	36.00	7.35	50.18	37.58	6.40	53.13	39.12	5.57	55.99	40.62	4.84	58.78	42.11	4.21	1600	55.26	52.62	3.52	61.52	43.58	3.65	
	57 (13.9)	1600	43.16	43.16	7.19	45.55	45.55	6.23	47.97	47.63	5.40	50.44	49.37	4.69	52.86	51.01	4.06	1600	55.26	52.62	3.52	61.52	43.58	3.65	
	72 (22.2)	1600	55.24	30.04	7.70	58.86	31.53	6.73	62.40	33.00	5.88	65.82	34.44	5.13	68.15	35.85	4.47	1600	72.44	37.26	3.89	72.44	37.26	3.89	
80 (26.7)	67 (19.4)	1600	50.50	37.37	7.50	53.83	38.98	6.54	57.00	40.53	5.70	60.10	42.07	4.96	63.13	43.59	4.32	1600	66.10	45.08	3.75	66.10	45.08	3.75	
	63 (17.2)	1600	47.09	43.10	7.35	50.13	44.81	6.40	53.07	46.46	5.57	55.91	48.08	4.84	58.70	49.67	4.21	1600	61.44	51.25	3.65	61.44	51.25	3.65	
	57 (13.9)	1600	45.62	45.62	7.29	48.12	48.12	6.33	50.51	50.51	5.49	52.83	52.83	4.76	55.06	55.06	4.12	1600	57.24	57.24	3.56	57.24	57.24	3.56	
	72 (22.2)	1350	35.94	15.07	3.39	38.40	15.98	3.08	40.44	16.73	2.76	42.79	17.61	2.51	45.10	18.48	2.29	1350	47.36	19.34	2.08	47.36	19.34	2.08	
	67 (19.4)	1350	32.49	20.54	3.35	34.72	21.48	3.05	36.67	22.32	2.72	38.80	23.24	2.47	40.88	24.15	2.24	1350	42.94	25.05	2.04	42.94	25.05	2.04	
80 (26.7)	63 (17.2)	1350	29.95	24.83	3.33	32.01	25.81	3.03	33.87	26.70	2.69	35.85	27.65	2.44	37.78	28.59	2.22	1350	39.68	29.52	2.01	39.68	29.52	2.01	
	57 (13.9)	1350	28.14	28.14	3.32	29.76	29.76	3.02	31.24	31.24	2.67	32.75	32.75	2.42	34.21	34.21	2.19	1350	35.65	35.65	1.99	35.65	35.65	1.99	
	72 (22.2)	1350	35.82	20.59	3.39	38.29	21.54	3.08	40.32	22.34	2.76	42.67	23.26	2.51	44.98	24.17	2.29	1350	47.24	25.07	2.08	47.24	25.07	2.08	
	67 (19.4)	1350	32.39	26.01	3.35	34.62	26.99	3.05	36.56	27.87	2.72	38.70	28.83	2.47	40.78	29.77	2.24	1350	42.84	30.72	2.04	42.84	30.72	2.04	
	57 (13.9)	1350	30.07	30.04	3.29	32.09	31.18	3.03	33.90	32.16	2.69	35.85	33.17	2.44	37.76	34.16	2.22	1350	39.65	35.14	2.01	39.65	35.14	2.01	
75 (23.9)	72 (22.2)	1200	26.64	11.34	1.89	28.56	12.02	1.84	30.22	33.22	2.68	34.80	34.80	2.43	36.33	36.33	2.21	975	37.82	37.82	2.00	37.82	37.82	2.00	
	67 (19.4)	1200	23.86	15.71	1.89	25.60	16.40	1.84	28.89	8.78	1.03	22.26	9.26	1.00	23.59	9.73	0.91	975	24.89	10.21	0.75	24.89	10.21	0.75	
	63 (17.2)	1200	21.85	19.14	1.89	23.45	19.83	1.84	18.63	11.93	1.02	19.89	12.40	1.00	21.11	12.85	0.92	975	22.30	13.31	0.77	22.30	13.31	0.77	
	57 (13.9)	1200	20.91	20.91	1.88	22.14	22.14	1.84	16.95	14.38	1.01	18.11	14.83	1.00	19.24	15.26	0.92	975	20.34	15.69	0.79	20.34	15.69	0.79	
	72 (22.2)	1200	26.55	15.84	1.89	28.46	16.52	1.84	15.97	15.97	1.01	16.81	16.81	1.00	17.62	17.62	0.94	975	18.38	18.38	0.81	18.38	18.38	0.81	
80 (26.7)	67 (19.4)	1200	23.79	20.16	1.89	25.52	20.85	1.84	20.81	12.06	1.03	22.18	12.52	1.00	23.51	12.97	0.91	975	24.81	13.42	0.75	24.81	13.42	0.75	
	63 (17.2)	1200	22.48	22.48	1.89	23.77	23.77	1.84	18.58	15.17	1.02	19.83	15.62	1.00	21.05	16.05	0.92	975	22.24	16.48	0.77	22.24	16.48	0.77	
	57 (13.9)	1200	22.44	22.44	1.89	23.72	23.72	1.84	17.25	17.25	1.01	18.20	17.98	1.00	19.28	18.43	0.92	975	20.35	18.85	0.79	20.35	18.85	0.79	
	72 (22.2)	1200	26.44	22.44	1.89	23.72	23.72	1.84	17.21	17.21	1.01	18.08	18.08	1.00	18.91	18.91	0.93	975	19.70	19.70	0.80	19.70	19.70	0.80	
	67 (19.4)	1200	23.79	20.16	1.89	25.52	20.85	1.84	20.81	12.06	1.03	22.18	12.52	1.00	23.51	12.97	0.91	975	24.81	13.42	0.75	24.81	13.42	0.75	

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 – Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

189BNV013 / FEANF02L Comfort + Dehumidify Mode
Condenser Entering Air Temperature F (°C)

EDB °F (°C)	EVAP. AIR		105 (40.5)			95 (35)			85 (29.4)			75 (23.9)			65 (18.3)		
	EWB °F (°C)	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW
			Total	Sensit			Total	Sensit			Total	Sensit			Total	Sensit	
75 (23.9)	72 (22.2)	360	13.14	5.38	1.16	420	14.21	5.86	0.98	420	15.07	6.18	0.81	420	15.92	6.51	0.65
	67 (19.4)		11.86	7.01	1.16		12.84	7.79	0.98		13.61	8.13	0.82		14.37	8.46	0.67
	63 (17.2)		10.91	8.29	1.16		11.83	9.30	0.99		12.53	9.64	0.83		13.22	9.98	0.69
	57 (13.9)		9.88	9.88	1.16		10.89	10.89	0.99		11.42	11.42	0.84		11.93	11.93	0.71
	72 (22.2)		13.10	7.04	1.16		14.16	7.81	0.98		15.02	8.15	0.81		15.87	8.49	0.65
80 (26.7)	67 (19.4)	360	11.82	8.65	1.16	420	12.80	9.71	0.98	420	13.57	10.07	0.82	420	14.33	10.42	0.67
	63 (17.2)		10.90	9.92	1.16		11.84	11.20	0.99		12.54	11.57	0.83		13.22	11.93	0.69
	57 (13.9)		10.51	10.51	1.16		11.59	11.59	0.99		12.16	12.16	0.83		12.70	12.70	0.70
	72 (22.2)		10.85	4.45	0.90		11.86	4.92	0.77		12.61	5.20	0.65		13.33	5.47	0.54
	67 (19.4)		9.75	5.82	0.91		10.67	6.59	0.78		11.33	6.88	0.68		11.97	7.17	0.57
75 (23.9)	63 (17.2)	300	8.96	6.90	0.91	360	9.81	7.90	0.79	360	10.40	8.20	0.69	360	10.98	8.49	0.60
	57 (13.9)		8.17	8.17	0.92		9.13	9.13	0.79		9.58	9.58	0.71		10.02	10.02	0.62
	72 (22.2)		10.82	5.86	0.90		11.82	6.62	0.77		12.56	6.92	0.65		13.29	7.21	0.54
	67 (19.4)		9.73	7.22	0.91		10.64	8.28	0.78		11.30	8.59	0.68		11.94	8.89	0.57
	63 (17.2)		8.97	8.29	0.91		9.84	9.57	0.79		10.42	9.89	0.69		10.99	10.21	0.60
80 (26.7)	57 (13.9)	300	8.70	8.70	0.91	360	9.73	9.73	0.79	360	10.22	10.22	0.69	360	10.68	10.68	0.60
	72 (22.2)		9.87	4.09	0.77		8.43	3.60	0.51		9.04	3.82	0.45		9.66	4.05	0.37
	67 (19.4)		8.87	5.49	0.78		7.60	5.04	0.52		8.15	5.28	0.46		8.69	5.52	0.39
	63 (17.2)		8.15	6.59	0.78		7.00	6.18	0.52		7.50	6.43	0.47		7.98	6.68	0.41
	57 (13.9)		7.59	7.59	0.78		6.74	6.74	0.52		7.15	7.15	0.47		7.53	7.53	0.42
75 (23.9)	72 (22.2)	300	9.83	5.52	0.77	300	8.39	5.05	0.51	300	9.00	5.30	0.45	300	9.62	5.55	0.37
	67 (19.4)		8.84	6.90	0.78		7.58	6.49	0.52		8.13	6.75	0.46		8.67	7.01	0.39
	63 (17.2)		8.17	7.99	0.78		7.22	7.22	0.52		7.65	7.65	0.47		8.07	8.07	0.41
	57 (13.9)		8.09	8.09	0.78		7.21	7.21	0.52		7.64	7.64	0.47		8.05	8.05	0.41
	72 (22.2)		10.27	4.28	0.28		10.27	4.28	0.28		10.27	4.28	0.28		10.27	4.28	0.28
80 (26.7)	67 (19.4)	300	9.22	5.76	0.32	300	9.22	5.76	0.32	300	9.22	5.76	0.32	300	9.22	5.76	0.32
	63 (17.2)		8.45	6.83	0.34		8.45	6.83	0.34		8.45	6.83	0.34		8.45	6.83	0.34
	57 (13.9)		7.89	7.89	0.36		7.89	7.89	0.36		7.89	7.89	0.36		7.89	7.89	0.36
	72 (22.2)		10.23	5.80	0.28		10.23	5.80	0.28		10.23	5.80	0.28		10.23	5.80	0.28
	67 (19.4)		9.19	7.27	0.32		9.19	7.27	0.32		9.19	7.27	0.32		9.19	7.27	0.32
80 (26.7)	63 (17.2)	300	8.49	8.42	0.34	300	8.49	8.42	0.34	300	8.49	8.42	0.34	300	8.49	8.42	0.34
	57 (13.9)		8.45	8.45	0.34		8.45	8.45	0.34		8.45	8.45	0.34		8.45	8.45	0.34

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

189BNV013

COOLING IN-DOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*FE4NF002L	1.00	1.00	
CAP**1814AL*	0.98	0.98	315(A,J)A)036070
CAP**2414AL*	0.99	0.99	315(A,J)A)036070
CAP**2417AL*	0.99	0.99	98(6*B,7*A)42060V17***
CAP**2417AL*	0.99	0.99	98(6*B,7*A)42080V17***
CNPH*2417AL*	0.99	0.99	98(6*B,7*A)42060V17***
CNPH*2417AL*	0.99	0.99	98(6*B,7*A)42080V17***
CNPV*2414AL*	1.00	1.00	315(A,J)A)036070
CNPV*2417AL*	0.99	0.99	98(6*B,7*A)42060V17***
CNPV*2417AL*	0.99	0.99	98(6*B,7*A)42080V17***
CSPH*2412AL*	1.00	1.00	98(6*B,7*A)42060V17***
CSPH*2412AL*	1.00	1.00	98(6*B,7*A)42080V17***

See additional notes on page 47

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

EDB °F (°C)	EVAP. AIR °F (°C)	189BNV02AA / FEANR005 Comfort + Dehumidify Mode Condenser Entering Air Temperature - F (°C)																			
		105 (40.5)					95 (35)					75 (23.9)					65 (18.3)				
		ID SCFM	Capacity MBtuh Total	Sensit	Total Sys. KW	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sensit	Total Sys. KW	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sensit	Total Sys. KW	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sensit	Total Sys. KW	Total Sys. KW
75 (23.9)	72 (22.2)	608	18.41	7.66	1.92	24.19	9.83	2.05	25.62	10.41	1.59	27.05	11.00	1.19	28.58	11.63	0.84				
	67 (19.4)		16.71	10.40	1.94	22.02	12.63	2.06	23.35	13.37	1.62	24.68	14.13	1.23	26.09	15.02	0.89				
	63 (17.2)		15.50	12.56	1.95	20.40	14.80	2.07	21.64	15.67	1.63	22.89	16.56	1.25	24.23	17.85	0.92				
	57 (13.9)		14.52	14.52	1.95	18.30	18.00	2.07	19.43	19.04	1.65	20.56	20.13	1.28	21.81	21.49	0.95				
	72 (22.2)		608	18.29	10.37	1.91	24.08	12.57	2.04	25.50	13.30	1.59	26.92	14.05	1.19	28.43	14.92	0.84			
67 (19.4)	16.65	13.09		1.94	21.95	15.35	2.06	23.28	16.24	1.62	24.60	17.16	1.23	26.00	18.28	0.89					
63 (17.2)	15.55	15.22		1.95	20.38	17.52	2.07	21.62	18.53	1.63	22.87	19.59	1.25	24.20	20.91	0.92					
57 (13.9)	15.42	15.42		1.95	19.24	19.24	2.07	20.39	20.39	1.64	21.57	21.57	1.27	22.92	22.92	0.94					
72 (22.2)	437	15.17		6.19	1.32	15.89	6.46	1.09	16.82	6.84	0.91	17.81	7.24	0.73	18.87	7.68	0.54				
67 (19.4)		13.78	8.02	1.34	14.47	8.33	1.11	15.33	8.80	0.93	16.24	9.32	0.76	17.22	9.94	0.59					
63 (17.2)		12.75	9.46	1.34	13.41	9.80	1.12	14.22	10.33	0.95	15.07	10.96	0.79	16.00	11.72	0.62					
57 (13.9)		11.46	11.46	1.35	12.02	11.94	1.12	12.74	12.57	0.97	13.52	13.34	0.82	14.39	14.31	0.66					
72 (22.2)		437	15.10	8.00	1.32	15.81	8.29	1.09	16.74	8.75	0.91	17.72	9.27	0.72	18.78	9.88	0.54				
67 (19.4)	13.74		9.82	1.34	14.42	10.15	1.11	15.28	10.70	0.93	16.19	11.34	0.76	17.16	12.14	0.59					
63 (17.2)	12.73		11.26	1.34	13.39	11.61	1.12	14.20	12.23	0.95	15.05	12.97	0.79	15.98	13.90	0.62					
57 (13.9)	12.15		12.15	1.34	12.89	12.69	1.12	13.42	13.42	0.96	14.24	14.24	0.80	15.18	15.18	0.64					
72 (22.2)	342		11.66	4.74	0.81	9.26	3.75	0.47	9.75	3.95	0.47	10.23	4.15	0.43	10.72	4.35	0.36				
67 (19.4)		10.56	6.08	0.83	8.39	4.68	0.48	8.84	4.89	0.49	9.27	5.09	0.47	9.70	5.30	0.40					
63 (17.2)		9.75	7.13	0.83	7.74	5.40	0.49	8.15	5.61	0.51	8.56	5.83	0.49	8.96	6.04	0.44					
57 (13.9)		8.68	8.68	0.84	6.85	6.46	0.49	7.22	6.68	0.52	7.59	6.90	0.52	7.95	7.12	0.48					
72 (22.2)		342	11.61	6.08	0.81	9.23	4.68	0.47	9.72	4.88	0.47	10.20	5.09	0.43	10.68	5.30	0.36				
67 (19.4)	10.53		7.41	0.83	8.37	5.60	0.48	8.81	5.82	0.49	9.25	6.03	0.47	9.68	6.24	0.40					
63 (17.2)	9.73		8.46	0.83	7.72	6.32	0.49	8.14	6.54	0.51	8.54	6.76	0.49	8.95	6.98	0.44					
57 (13.9)	9.21		9.21	0.83	7.09	7.09	0.49	7.40	7.40	0.52	7.70	7.70	0.51	8.00	8.00	0.48					
72 (22.2)	342		11.66	4.74	0.81	8.99	3.64	0.47	9.59	3.89	0.48	9.99	4.06	0.44	10.66	4.33	0.36				
67 (19.4)		10.56	6.08	0.83	8.13	4.46	0.48	8.68	4.76	0.50	9.04	4.92	0.48	9.65	5.25	0.41					
63 (17.2)		9.75	7.13	0.83	7.49	5.09	0.49	8.00	5.44	0.51	8.34	5.68	0.50	8.91	5.98	0.44					
57 (13.9)		8.68	8.68	0.84	6.63	6.02	0.49	7.09	6.43	0.52	7.39	6.56	0.52	7.90	7.04	0.48					
72 (22.2)		342	11.61	6.08	0.81	8.96	4.47	0.47	9.55	4.76	0.47	9.96	4.92	0.44	10.62	5.26	0.36				
67 (19.4)	10.53		7.41	0.83	8.11	5.28	0.48	8.66	5.63	0.50	9.02	5.78	0.48	9.63	6.18	0.41					
63 (17.2)	9.73		8.46	0.83	7.48	5.91	0.49	7.99	6.31	0.51	8.33	6.44	0.50	8.89	6.91	0.44					
57 (13.9)	9.21		9.21	0.83	6.73	6.73	0.49	7.19	7.19	0.52	7.40	7.40	0.52	7.93	7.93	0.48					

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

189BIV024B / FE4ANF002L Comfort + Dehumidify Mode
Condenser Entering Air Temperature F (°C)

EDB °F (°C)	EVAP. AIR EWB °F (°C)	105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	
		Total	Sensit			Total	Sensit			Total	Sensit			Total	Sensit			Total	Sensit		Total
75 (23.9)	72 (22.2)	24.23	9.92	2.44	25.33	10.31	2.12	26.93	10.95	1.84	28.54	11.60	1.58	30.28	12.32	1.33	708	708	27.51	15.77	1.34
	67 (19.4)	22.01	12.96	2.42	23.01	13.22	2.10	24.45	14.00	1.83	25.91	14.82	1.58	27.45	15.77	1.34					
	63 (17.2)	20.38	15.34	2.39	21.31	15.50	2.08	22.64	16.40	1.82	24.00	17.33	1.57	25.48	18.47	1.35					
	57 (13.9)	18.45	18.45	2.36	19.08	18.80	2.05	20.28	19.87	1.80	21.49	20.99	1.57	22.82	22.37	1.36					
	72 (22.2)	24.17	12.95	2.44	25.27	13.22	2.12	26.87	14.00	1.84	28.48	14.82	1.58	30.22	15.77	1.33					
80 (26.7)	67 (19.4)	21.96	15.96	2.42	22.96	16.09	2.10	24.40	17.02	1.83	25.86	17.99	1.58	27.45	19.17	1.34	708	708	25.45	21.85	1.35
	63 (17.2)	20.36	18.31	2.39	21.28	18.35	2.08	22.61	19.39	1.82	23.97	20.49	1.57	25.45	21.85	1.35					
	57 (13.9)	19.56	19.56	2.38	20.08	20.08	2.07	21.29	21.29	1.81	22.54	22.54	1.57	23.97	23.97	1.35					
	72 (22.2)	16.80	6.88	1.49	17.53	7.13	1.28	18.69	7.80	1.10	19.82	8.06	0.92	21.04	8.55	0.76					
	67 (19.4)	15.18	8.96	1.50	15.85	9.13	1.28	16.89	9.72	1.11	17.91	10.28	0.95	18.99	10.93	0.79					
75 (23.9)	63 (17.2)	13.98	10.59	1.50	14.80	10.69	1.28	15.56	11.37	1.13	16.49	12.01	0.97	17.48	12.77	0.82	484	484	15.53	15.43	0.86
	57 (13.9)	12.83	12.83	1.49	12.99	12.94	1.29	13.83	13.75	1.14	14.64	14.51	1.00	15.53	15.43	0.86					
	72 (22.2)	16.75	8.99	1.49	17.48	9.16	1.28	18.64	9.75	1.10	19.77	10.32	0.92	20.98	10.97	0.76					
	67 (19.4)	15.14	11.05	1.50	15.81	11.13	1.28	16.85	11.84	1.11	17.87	12.51	0.95	18.95	13.31	0.79					
	63 (17.2)	13.97	12.86	1.50	14.59	12.68	1.28	15.54	13.48	1.13	16.47	14.23	0.97	17.46	15.14	0.82					
80 (26.7)	57 (13.9)	13.43	13.43	1.50	13.78	13.78	1.29	14.66	14.66	1.13	15.51	15.51	0.99	16.47	16.47	0.84	484	484	18.95	13.31	0.79
	72 (22.2)	13.91	5.70	1.21	8.34	3.43	0.52	8.89	3.65	0.44	9.31	3.80	0.37	9.90	4.05	0.29					
	67 (19.4)	12.50	7.42	1.22	7.48	4.49	0.53	7.97	4.78	0.46	8.34	4.91	0.40	8.86	5.24	0.33					
	63 (17.2)	11.48	8.77	1.22	6.85	5.34	0.53	7.30	5.67	0.47	7.63	5.79	0.41	8.11	6.18	0.35					
	57 (13.9)	10.41	10.41	1.22	6.25	6.25	0.54	6.65	6.65	0.48	6.87	6.87	0.43	7.32	7.32	0.37					
75 (23.9)	72 (22.2)	13.87	7.46	1.21	8.31	4.53	0.52	8.86	4.82	0.44	9.28	4.96	0.37	9.87	5.29	0.29	245	245	8.83	6.48	0.33
	67 (19.4)	12.47	9.17	1.22	7.45	5.59	0.53	7.94	5.94	0.46	8.31	6.06	0.40	8.83	6.48	0.33					
	63 (17.2)	11.48	10.51	1.22	6.85	6.43	0.53	7.30	6.83	0.47	7.62	6.93	0.41	8.10	7.41	0.35					
	57 (13.9)	11.08	11.08	1.22	6.68	6.68	0.54	7.10	7.10	0.48	7.33	7.33	0.42	7.81	7.81	0.36					
	72 (22.2)	13.91	5.70	1.21	8.34	3.43	0.52	8.89	3.65	0.44	9.31	3.80	0.37	9.90	4.05	0.29					

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

189BNV024B

Table with 5 columns: COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL, FURNACE MODEL. Rows include models like CSPH*4212AL*, CAP**2417AL*, and CAP**3014AL* with corresponding capacity and power values.

Table with 5 columns: COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL, FURNACE MODEL. Rows include models like *FE4ANF002L, FE4AN(B)F003L, FE4AN(B)F005L, CAP**2414AL*, and CAP**3014AL* with corresponding capacity and power values.

2-STAGE (Hi-Stage 5, Lo-Stage 2)

Table with 5 columns: Cooling Indoor Model, High Speed Cap., Power, Low Speed Cap., Power, Furnace Model. This is a condensed version of the data in the tables above, showing only the power and capacity values for various indoor models.

2-STAGE (Hi-Stage 5, Lo-Stage 2)

Table with 5 columns: Cooling Indoor Model, High Speed Cap., Power, Low Speed Cap., Power, Furnace Model. This is a condensed version of the data in the tables above, showing only the power and capacity values for various indoor models.

Table with 5 columns: Cooling Indoor Model, High Speed Cap., Power, Low Speed Cap., Power, Furnace Model. Rows include models like CNPV*2417AL*, CNPV*3014AL*, and CNPV*3017AL* with corresponding capacity and power values.

See notes on page 47

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

EDB ° F (° C)	EVAP. AIR ° F (° C)		189BNV257 FEANF005 Comfort + Dehumidify Mode Condenser Entering Air Temperature ° F (° C)										75 (23.9)										85 (18.9)									
			105 (40.5)					95 (35)					85 (29.4)					75 (23.9)					65 (18.9)									
			Capacity MBtuh		Total Sys. KW		ID SCFM	Capacity MBtuh		Total Sys. KW		ID SCFM	Capacity MBtuh		Total Sys. KW		ID SCFM	Capacity MBtuh		Total Sys. KW		ID SCFM	Capacity MBtuh		Total Sys. KW		ID SCFM	Capacity MBtuh		Total Sys. KW		
			Total	Sensit	Total	Sensit		Total	Sensit	Total	Sensit		Total	Sensit	Total	Sensit		Total	Sensit	Total	Sensit		Total	Sensit	Total	Sensit		Total	Sensit	Total	Sensit	Total
75 (23.9)	72 (22.2)	19.25	8.01	1.62	608	25.24	10.26	1.88	608	26.68	10.84	1.61	663	28.11	11.43	1.34	708	29.64	12.06	1.07												
	67 (19.4)	17.48	10.88	1.63		22.98	13.18	1.89		24.31	13.92	1.63		25.64	14.68	1.38																
	63 (17.2)	16.21	13.13	1.64		21.29	15.45	1.90		22.54	16.31	1.65		23.79	17.21	1.41																
	57 (13.9)	15.18	15.18	1.65		19.10	18.78	1.90		20.23	19.83	1.66		21.37	20.92	1.44																
	72 (22.2)	19.12	10.84	1.61		25.12	13.12	1.88		26.55	13.85	1.60		27.98	14.60	1.33																
80 (26.7)	67 (19.4)	17.42	13.69	1.63	608	22.91	16.02	1.89	634	24.24	16.91	1.63	663	25.56	17.83	1.38	708	26.97	18.96	1.13												
	63 (17.2)	16.26	15.91	1.64		21.26	18.28	1.90		22.51	19.29	1.65		23.76	20.35	1.41																
	57 (13.9)	16.12	16.12	1.64		20.08	20.08	1.90		21.23	21.23	1.66		22.41	22.41	1.42																
	72 (22.2)	15.62	6.37	1.16		16.33	6.64	1.03		17.27	7.02	0.91		18.26	7.42	0.78																
	67 (19.4)	14.19	8.25	1.17		14.88	8.57	1.04		15.74	9.03	0.94		16.66	9.56	0.82																
75 (23.9)	63 (17.2)	13.12	9.74	1.18	437	13.79	10.07	1.05	452	14.60	10.61	0.96	475	15.46	11.23	0.85	510	16.38	12.00	0.71												
	57 (13.9)	11.80	11.80	1.18		12.35	12.27	1.06		13.08	12.91	0.97		13.87	13.68	0.88																
	72 (22.2)	15.55	8.23	1.16		16.25	8.52	1.02		17.19	8.98	0.91		18.17	9.50	0.78																
	67 (19.4)	14.14	10.11	1.17		14.83	10.44	1.04		15.69	10.99	0.94		16.60	11.63	0.82																
	63 (17.2)	13.11	11.59	1.18		13.77	11.94	1.05		14.58	12.56	0.96		15.44	13.30	0.85																
57 (13.9)	12.51	12.51	1.18	13.05	13.05	1.05	13.78	13.78	0.97	14.60	14.60	0.86																				
75 (23.9)	72 (22.2)	6.36	2.59	0.47	342	9.26	3.75	0.47	250	9.75	3.95	0.47	250	10.23	4.15	0.43	250	10.72	4.35	0.36												
	67 (19.4)	10.72	6.18	0.76		8.39	4.68	0.48		8.84	4.89	0.49		9.27	5.09	0.47																
	63 (17.2)	9.90	7.24	0.76		7.74	5.40	0.49		8.15	5.61	0.51		8.56	5.83	0.49																
	57 (13.9)	8.82	8.81	0.77		6.85	6.46	0.49		7.22	6.68	0.52		7.59	6.90	0.52																
	72 (22.2)	11.79	6.17	0.75		9.23	4.68	0.47		9.72	4.88	0.47		10.20	5.09	0.43																
80 (26.7)	67 (19.4)	10.69	7.53	0.76	8.37	5.60	0.48	8.81	5.82	0.49	9.25	6.03	0.47																			
	63 (17.2)	9.88	8.60	0.76	7.72	6.32	0.49	8.14	6.54	0.51	8.54	6.76	0.49																			
	57 (13.9)	9.35	9.35	0.77	7.09	7.09	0.49	7.40	7.40	0.52	7.70	7.70	0.51																			
	72 (22.2)	3.18	1.29	0.24	8.99	3.64	0.47	9.59	3.89	0.48	9.99	4.06	0.44																			
	67 (19.4)	10.72	6.18	0.76	8.13	4.46	0.48	8.68	4.76	0.50	9.04	4.92	0.48																			
75 (23.9)	63 (17.2)	9.90	7.24	0.76	342	7.49	5.09	0.49	222	8.00	5.44	0.51	229	8.34	5.58	0.50	245	8.91	5.98	0.44												
	57 (13.9)	8.82	8.81	0.77		6.63	6.02	0.49		7.09	6.43	0.52		7.39	6.56	0.52																
	72 (22.2)	11.79	6.17	0.75		8.96	4.47	0.47		9.55	4.76	0.47		9.96	4.92	0.44																
	67 (19.4)	10.69	7.53	0.76		8.11	5.28	0.48		8.66	5.63	0.50		9.02	5.78	0.48																
	63 (17.2)	9.88	8.60	0.76		7.48	5.91	0.49		7.99	6.31	0.51		8.33	6.44	0.50																
57 (13.9)	9.35	9.35	0.77	6.73	6.73	0.49	7.19	7.19	0.52	7.40	7.40	0.52																				
80 (26.7)	72 (22.2)	3.18	1.29	0.24	342	8.99	3.64	0.47	222	9.59	3.89	0.48	229	9.99	4.06	0.44	245	10.66	4.33	0.36												
	67 (19.4)	10.72	6.18	0.76		8.13	4.46	0.48		8.68	4.76	0.50		9.04	4.92	0.48																
	63 (17.2)	9.90	7.24	0.76		7.49	5.09	0.49		8.00	5.44	0.51		8.34	5.58	0.50																
	57 (13.9)	8.82	8.81	0.77		6.63	6.02	0.49		7.09	6.43	0.52		7.39	6.56	0.52																
	72 (22.2)	11.79	6.17	0.75		8.96	4.47	0.47		9.55	4.76	0.47		9.96	4.92	0.44																
80 (26.7)	67 (19.4)	10.69	7.53	0.76	8.11	5.28	0.48	8.66	5.63	0.50	9.02	5.78	0.48																			
	63 (17.2)	9.88	8.60	0.76	7.48	5.91	0.49	7.99	6.31	0.51	8.33	6.44	0.50																			
	57 (13.9)	9.35	9.35	0.77	6.73	6.73	0.49	7.19	7.19	0.52	7.40	7.40	0.52																			
	72 (22.2)	3.18	1.29	0.24	8.99	3.64	0.47	9.59	3.89	0.48	9.99	4.06	0.44																			
	67 (19.4)	10.72	6.18	0.76	8.13	4.46	0.48	8.68	4.76	0.50	9.04	4.92	0.48																			

STAGE 1 - ALL OTHER INDOOR COMBINATIONS

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 - Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

EDB ° F (° C)	EVAP. AIR ° F (° C)	188RNV035 / FE2ANF005 Comfort + Dehumidify Mode Condenser Entering Air Temperature ° F (° C)										75 (23.9)										85 (18.3)									
		105 (40.5)					85 (35)					STAGE 5					75 (23.9)					85 (18.3)									
		ID SCFM	Capacity Total	MBtuh Sensit	Total Sys. KW	ID SCFM	Capacity Total	MBtuh Sensit	Total Sys. KW	ID SCFM	Capacity Total	MBtuh Sensit	Total Sys. KW	ID SCFM	Capacity Total	MBtuh Sensit	Total Sys. KW	ID SCFM	Capacity Total	MBtuh Sensit	Total Sys. KW	ID SCFM	Capacity Total	MBtuh Sensit	Total Sys. KW						
75 (23.9)	72 (22.2)	35.03	14.21	3.80	36.79	14.91	3.28	38.97	15.79	2.81	41.14	16.67	2.38	43.43	17.61	1.97	812	848	887	948	948	948	948	948	948						
	67	32.03	18.10	3.76	33.69	18.87	3.26	35.70	19.98	2.81	37.69	21.10	2.39	39.83	22.39	2.00															
	63	29.78	21.12	3.72	31.34	21.94	3.23	33.23	23.22	2.80	35.10	24.53	2.40	37.11	26.09	2.02															
	57	26.68	25.51	3.66	28.08	26.39	3.19	29.78	27.92	2.78	31.49	29.50	2.40	33.35	31.47	2.04															
	57 (13.9)	34.90	17.98	3.79	36.65	18.72	3.28	38.82	19.81	2.81	40.98	20.92	2.37	43.26	22.19	1.97															
80 (26.7)	72 (22.2)	31.95	21.83	3.75	33.80	22.64	3.25	35.61	23.95	2.81	37.60	25.30	2.39	39.72	26.91	2.00	812	848	887	948	948	948	948	948	948						
	67	29.73	24.84	3.72	31.29	25.70	3.23	33.16	27.18	2.80	35.04	28.72	2.39	37.04	30.61	2.02															
	63	27.71	27.71	3.68	28.95	28.95	3.20	30.66	30.66	2.78	32.41	32.41	2.40	34.42	34.42	2.04															
	57	21.74	8.83	1.80	22.72	9.22	1.63	24.20	9.82	1.47	25.61	10.39	1.30	27.10	11.00	1.09															
	57 (13.9)	19.76	11.28	1.80	20.72	11.74	1.64	22.09	12.54	1.49	23.39	13.27	1.33	24.77	14.10	1.14															
75 (23.9)	72 (22.2)	14.50	5.90	0.99	9.48	3.84	0.49	10.07	4.08	0.49	10.66	4.32	0.45	11.47	4.65	0.35	417	250	250	250	250	250	250	250	250						
	67	13.17	7.58	1.00	8.59	4.79	0.50	9.13	5.04	0.52	9.66	5.30	0.49	10.39	5.71	0.41															
	63	12.18	8.91	1.00	7.92	5.53	0.51	8.42	5.80	0.53	8.92	6.07	0.51	9.60	6.55	0.45															
	57	10.89	10.84	1.01	7.02	6.61	0.52	7.46	6.90	0.55	7.91	7.19	0.54	8.52	7.77	0.49															
	57 (13.9)	14.44	7.57	0.99	9.44	4.79	0.49	10.03	5.04	0.49	10.62	5.30	0.45	11.43	5.71	0.35															
80 (26.7)	72 (22.2)	13.13	9.25	1.00	8.56	5.73	0.50	9.10	6.01	0.52	9.64	6.28	0.49	10.36	6.78	0.41	417	250	250	250	250	250	250	250	250						
	67	12.16	10.56	1.00	7.91	6.47	0.51	8.41	6.76	0.53	8.91	7.05	0.51	9.58	7.61	0.45															
	63	11.52	11.52	1.01	7.26	7.26	0.52	7.64	7.64	0.54	8.03	8.03	0.54	8.66	8.66	0.48															
	57	14.50	5.90	0.99	9.35	3.79	0.49	9.88	4.01	0.50	10.62	4.30	0.45	11.47	4.65	0.35															
	57 (13.9)	13.17	7.58	1.00	8.46	4.68	0.50	8.94	4.90	0.52	9.62	5.27	0.49	10.39	5.71	0.41															
75 (23.9)	72 (22.2)	12.18	8.91	1.00	7.80	5.37	0.51	8.25	5.59	0.53	8.88	6.02	0.51	9.60	6.55	0.45	417	236	236	236	236	236	236	236	236						
	67	10.89	10.84	1.01	6.91	6.39	0.52	7.30	6.60	0.55	7.87	7.12	0.54	8.52	7.77	0.49															
	63	14.44	7.57	0.99	9.31	4.68	0.49	9.84	4.90	0.50	10.58	5.27	0.45	11.43	5.71	0.35															
	57	13.13	9.25	1.00	8.44	5.57	0.50	8.92	5.79	0.52	9.60	6.23	0.49	10.36	6.78	0.41															
	57 (13.9)	12.16	10.56	1.00	7.79	6.26	0.51	8.23	6.48	0.53	8.87	6.98	0.51	9.58	7.61	0.45															
80 (26.7)	72 (22.2)	11.52	11.52	1.01	7.08	7.08	0.52	7.39	7.39	0.55	7.97	7.97	0.54	8.66	8.66	0.48	417	232	232	232	232	232	232	232	232						
	67	14.50	5.90	0.99	9.35	3.79	0.49	9.88	4.01	0.50	10.62	4.30	0.45	11.47	4.65	0.35															
	63	13.17	7.58	1.00	8.46	4.68	0.50	8.94	4.90	0.52	9.62	5.27	0.49	10.39	5.71	0.41															
	57	12.18	8.91	1.00	7.80	5.37	0.51	8.25	5.59	0.53	8.88	6.02	0.51	9.60	6.55	0.45															
	57 (13.9)	10.89	10.84	1.01	6.91	6.39	0.52	7.30	6.60	0.55	7.87	7.12	0.54	8.52	7.77	0.49															

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 1 — Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES#- COMFORT + DEHUMIDIFY MODE CONTINUED

189BNV036

Table with 7 columns: COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL, COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL. Contains multiple rows of technical specifications for various cooling models and furnace configurations.

Table with 7 columns: COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL, COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL. Contains multiple rows of technical specifications for various cooling models and furnace configurations.

Table with 7 columns: COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL, COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL. Contains multiple rows of technical specifications for various cooling models and furnace configurations.

Table with 7 columns: COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL, COOLING INDOOR MODEL, CAPACITY, POWER, FURNACE MODEL. Contains multiple rows of technical specifications for various cooling models and furnace configurations.

See notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

EDB °F (°C)	EVAP. AIR °F (°C)	188RN1037 / FE2ANB096L Efficiency Mode Condenser Entering Air Temperature - F (°C)										75 (23.3)										65 (18.3)									
		115 (46.1)					105 (40.5)					95 (35)					85 (29.4)					75 (23.3)					65 (18.3)				
		ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	Total Sys. KW**	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW**	Total Sys. KW**					
75 (23.9)	72 (22.2)		32.70	13.63	3.49	34.98	14.48	3.05	37.03	15.26	2.59	39.26	16.11	2.21	41.44	16.95	1.86	43.61	17.78	1.54											
	67 (19.4)	1050	31.53	19.22	3.08	31.81	19.44	3.03	33.70	20.30	2.58	35.71	21.22	2.21	37.89	22.14	1.87	39.65	23.05	1.56	1050										
	63 (17.2)		27.56	22.83	3.44	29.48	23.32	3.02	31.25	24.26	2.58	33.12	25.24	2.21	34.94	26.21	1.88	36.75	27.17	1.58											
	57 (13.9)		25.78	25.78	3.41	27.31	27.31	3.00	28.73	28.73	2.56	30.19	30.19	2.21	31.62	31.62	1.89	33.01	33.01	1.61											
	72 (22.2)		32.58	18.47	3.49	34.88	19.41	3.05	36.91	20.26	2.59	39.14	21.19	2.21	41.32	22.11	1.86	43.48	23.02	1.54											
80 (26.7)	67 (19.4)	1050	31.43	24.01	3.08	31.71	24.30	3.03	33.60	25.24	2.58	35.61	26.24	2.21	37.59	27.23	1.87	39.55	28.22	1.56	1050										
	63 (17.2)		27.61	27.02	3.44	29.49	28.13	3.02	31.23	29.15	2.58	33.10	30.22	2.21	34.91	31.27	1.88	36.70	32.31	1.58											
	57 (13.9)		27.36	27.36	3.44	28.98	28.98	3.01	30.45	30.45	2.57	32.00	32.00	2.21	33.49	33.49	1.89	34.96	34.96	1.59											
	72 (22.2)		22.96	9.72	2.41	24.70	10.37	2.11	26.36	10.99	1.76	28.08	11.65	1.50	29.77	12.29	1.25	31.45	12.83	1.03											
	67 (19.4)	900	20.81	13.49	2.42	22.39	14.22	2.13	23.90	14.93	1.79	25.43	15.85	1.54	26.95	16.37	1.30	28.46	17.09	1.08											
75 (23.9)	63 (17.2)		19.24	16.44	2.42	20.88	17.23	2.14	22.09	18.01	1.80	23.50	18.79	1.56	24.89	19.57	1.34	26.28	20.35	1.13	900										
	57 (13.9)		18.34	18.34	2.42	19.54	19.54	2.15	20.70	20.70	1.82	21.85	21.85	1.58	22.98	22.98	1.37	24.10	24.10	1.17											
	72 (22.2)		22.86	13.49	2.41	24.60	14.23	2.11	26.26	14.93	1.76	27.98	15.87	1.50	29.67	16.39	1.25	31.35	17.12	1.03											
	67 (19.4)	900	20.74	17.22	2.42	22.31	18.03	2.13	23.83	18.82	1.79	25.36	19.62	1.54	26.87	20.42	1.30	28.38	21.22	1.08											
	63 (17.2)		19.57	19.57	2.42	20.83	20.83	2.14	22.16	21.83	1.80	23.54	22.72	1.56	24.92	23.58	1.33	26.29	24.45	1.12	900										
80 (26.7)	72 (22.2)		19.53	19.53	2.42	20.79	20.79	2.14	22.01	22.01	1.80	23.22	23.22	1.56	24.42	24.42	1.34	25.59	25.59	1.14											
	67 (19.4)	800	18.16	7.73	1.96	19.62	8.28	1.73	21.04	8.99	1.47	22.51	9.66	1.19	24.00	10.45	0.87	26.00	11.44	0.70											
	63 (17.2)		16.42	10.82	1.98	17.74	11.45	1.76	19.06	12.21	1.47	20.53	13.00	1.19	22.02	13.90	0.95	23.92	14.85	0.86	600										
	57 (13.9)		15.19	13.25	1.99	16.40	13.94	1.77	17.82	14.67	1.47	19.29	15.46	1.19	20.78	16.35	0.95	22.67	17.30	0.86											
	72 (22.2)		14.59	14.59	1.99	15.61	15.61	1.78	16.63	16.63	1.56	17.65	17.65	1.34	18.69	18.69	1.03	20.76	20.76	0.76											
75 (23.9)	67 (19.4)	800	18.08	10.84	1.96	19.54	11.47	1.73	21.04	12.21	1.47	22.51	13.40	1.19	24.00	14.44	0.86	26.00	15.39	0.70											
	63 (17.2)		16.38	13.89	1.98	17.69	14.60	1.75	19.06	15.46	1.47	20.53	16.35	1.19	22.02	17.30	0.86	23.92	18.33	0.70	600										
	57 (13.9)		15.57	15.57	1.99	16.66	16.66	1.77	17.65	17.65	1.56	18.69	18.69	1.19	20.76	20.76	0.86	22.87	22.87	0.70											
	72 (22.2)	800	15.54	15.54	1.99	16.63	16.63	1.77	17.65	17.65	1.56	18.69	18.69	1.19	20.76	20.76	0.86	22.87	22.87	0.70	600										
	67 (19.4)																														

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 – Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

189BNV037

2-STAGE (Hi-Stage 5, Lo-Stage 2)						
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model	Furnace Model
CSPH*4812AL*	0.98	1.03	0.98	1.07	314AAV036045	922*A48080E17***
CAP**3617AL*	0.95	1.01	0.97	1.06	314AAV048070	922*A48080E17***
CAP**4817AL*	0.98	1.04	0.98	1.06	314AAV048070	925*A42060E17***
CNPV*3617AL*	0.95	1.03	0.96	1.08	314AAV048070	925*A42060E17***
CNPV*3617AL*	0.95	1.02	0.96	1.06	314AAV048070	925*A42060E17***
CNPV*3717AL*	0.99	1.04	0.98	1.06	314AAV048070	925*A42060E17***
CNPV*4212AL*	0.97	1.03	0.98	1.07	314AAV048070	925*A42060E17***
CAP**4817AL*	0.98	1.03	0.98	1.03	314AAV048070	925*A42060E17***
CNPV*3612AL*	0.98	1.03	0.98	1.07	314AAV048070	925*A42060E17***
CNPV*3717AL*	0.98	1.03	0.98	1.13	926*A42060V17***	926*A42060V17***
CNPV*4212AL*	0.97	1.03	0.98	1.14	926*A42060V17***	926*A42060V17***
CSPH*4212AL*	0.96	1.03	0.98	1.14	926*A42060V17***	926*A42060V17***
CAP**4817AL*	0.98	1.03	0.98	1.13	926*A42060V17***	926*A42060V17***
CAP**4817AL*	0.98	1.03	0.98	1.11	926*A48080V17***	926*A48080V17***
CNPV*3717AL*	0.98	1.04	0.99	1.11	926*A48080V17***	926*A48080V17***
CNPV*4212AL*	0.96	1.02	0.98	1.12	926*A48080V17***	926*A48080V17***
CSPH*4212AL*	0.98	1.03	0.99	1.12	926*A48080V17***	926*A48080V17***
CSPH*4212AL*	0.98	1.03	0.99	1.12	926*A48080V17***	926*A48080V17***
CSPH*4812AL*	0.98	1.04	0.99	1.11	926*A60080V21***	926*A60080V21***
CAP**3621AL*	0.95	1.01	0.98	1.09	926*A60080V21***	926*A60080V21***
CNPV*4221AL*	0.96	1.01	0.98	1.09	926*A60080V21***	926*A60080V21***
CAP**4821AL*	0.97	1.00	0.99	1.09	926*A60080V21***	926*A60080V21***
CNPV*4821AL*	0.96	1.02	0.98	1.10	926*A60080V21***	926*A60080V21***
CNPV*4821AL*	0.99	1.02	1.00	1.07	926*A60080V21***	926*A60080V21***
CNPV*4821AL*	0.98	1.01	0.99	1.08	926*A60080V21***	926*A60080V21***
CNPV*3621AL*	0.95	1.01	0.97	1.10	926*A60080V21***	926*A60080V21***
CNPV*4221AL*	0.96	1.02	0.98	1.10	926*A60080V21***	926*A60080V21***
CNPV*4821AL*	0.98	1.01	0.99	1.08	926*A60080V21***	926*A60080V21***
CNPV*4821AL*	0.96	1.01	0.99	1.08	926*A60080V21***	926*A60080V21***
CNPV*4821AL*	0.98	1.01	0.99	1.08	926*A60080V21***	926*A60080V21***
CNPV*4821AL*	0.95	1.01	0.98	1.10	926*A60100V21***	926*A60100V21***
CNPV*4221AL*	0.96	1.02	0.98	1.10	926*A60100V21***	926*A60100V21***
CNPV*4821AL*	0.98	1.01	0.99	1.09	926*A60100V21***	926*A60100V21***
CNPV*4821AL*	0.96	1.01	0.99	1.08	926*A60100V21***	926*A60100V21***
CNPV*4821AL*	0.98	1.01	0.99	1.08	926*A60100V21***	926*A60100V21***
CNPV*3621AL*	0.95	1.01	0.98	1.10	926*A60100V21***	926*A60100V21***
CNPV*4221AL*	0.96	1.02	0.98	1.10	926*A60100V21***	926*A60100V21***
CNPV*4821AL*	0.98	1.01	0.99	1.09	926*A60100V21***	926*A60100V21***
CNPV*4821AL*	0.96	1.01	0.99	1.08	926*A60100V21***	926*A60100V21***
CNPV*4821AL*	0.98	1.01	0.99	1.08	926*A60100V21***	926*A60100V21***
CNPV*4821AL*	0.95	1.01	0.98	1.10	926*A66120V24***	926*A66120V24***
CNPV*4221AL*	0.96	1.02	0.98	1.07	926*A66120V24***	926*A66120V24***
CNPV*4821AL*	0.98	1.01	0.99	1.07	926*A66120V24***	926*A66120V24***
CNPV*4821AL*	0.96	1.01	0.99	1.08	926*A66120V24***	926*A66120V24***
CNPV*4821AL*	0.98	1.01	0.99	1.08	926*A66120V24***	926*A66120V24***
CNPV*3621AL*	0.95	1.01	0.98	1.10	926*A66120V24***	926*A66120V24***
CNPV*4221AL*	0.96	1.02	0.98	1.08	926*A66120V24***	926*A66120V24***
CNPV*4821AL*	0.98	1.01	0.99	1.08	926*A66120V24***	926*A66120V24***

See notes on page 47

2-STAGE (Hi-Stage 5, Lo-Stage 2)						
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model	Furnace Model
CSPH*4812AL*	0.98	1.03	0.98	1.07	314AAV036045	922*A48080E17***
CAP**3617AL*	0.95	1.01	0.97	1.06	314AAV048070	922*A48080E17***
CAP**4817AL*	0.98	1.04	0.98	1.06	314AAV048070	925*A42060E17***
CNPV*3617AL*	0.95	1.03	0.96	1.08	314AAV048070	925*A42060E17***
CNPV*3617AL*	0.95	1.02	0.96	1.06	314AAV048070	925*A42060E17***
CNPV*3717AL*	0.99	1.04	0.98	1.06	314AAV048070	925*A42060E17***
CNPV*4212AL*	0.97	1.03	0.98	1.07	314AAV048070	925*A42060E17***
CAP**4817AL*	0.98	1.03	0.98	1.03	314AAV048070	925*A42060E17***
CNPV*3612AL*	0.98	1.03	0.98	1.07	314AAV048070	925*A42060E17***
CNPV*3717AL*	0.98	1.03	0.98	1.07	314AAV048070	925*A42060E17***
CNPV*4212AL*	0.98	1.04	0.98	1.05	314AAV048070	925*A42060E17***
CSPH*4212AL*	0.96	1.01	0.97	1.04	314AAV048090	926*A42060V17***
CAP**4221AL*	0.96	0.99	0.98	1.04	314AAV048090	926*A42060V17***
CAP**4821AL*	0.98	1.01	0.98	1.03	314AAV048090	926*A42060V17***
CNPV*4221AL*	0.96	1.01	0.97	1.05	314AAV048090	926*A42060V17***
CNPV*4821AL*	0.98	1.01	0.98	1.03	314AAV048090	926*A42060V17***
CNPV*4821AL*	0.96	1.01	0.98	1.03	314AAV048090	926*A42060V17***
CNPV*3612AL*	0.97	1.00	0.98	1.04	314AAV048090	926*A42060V17***
CNPV*4212AL*	0.98	1.01	0.98	1.04	314AAV048090	926*A42060V17***
CSPH*4812AL*	0.98	1.01	0.98	1.03	314AAV048090	926*A42060V17***
CAP**3621AL*	0.96	0.99	0.97	1.03	314AAV066110	926*A60080V21***
CAP**4221AL*	0.96	0.99	0.98	1.03	314AAV066110	926*A60080V21***
CAP**4821AL*	0.98	1.01	0.98	1.03	314AAV066110	926*A60080V21***
CNPV*4221AL*	0.96	0.99	0.97	1.04	314AAV066110	926*A60080V21***
CNPV*4821AL*	0.99	1.03	0.99	1.01	314AAV066110	926*A60080V21***
CNPV*4821AL*	0.98	1.01	0.98	1.04	314AAV066110	926*A60080V21***
CNPV*3621AL*	0.95	1.01	0.96	1.04	314AAV066110	926*A60080V21***
CNPV*4221AL*	0.96	0.99	0.97	1.04	314AAV066110	926*A60080V21***
CNPV*4821AL*	0.98	1.01	0.98	1.01	314AAV066110	926*A60080V21***
CNPV*4821AL*	0.96	0.99	0.97	1.04	314AAV066110	926*A60080V21***
CNPV*4821AL*	0.98	1.01	0.98	1.01	314AAV066110	926*A60080V21***
CNPV*4821AL*	0.98	1.01	0.98	1.03	314AAV066110	926*A60080V21***
CNPV*3612AL*	0.97	1.00	0.98	1.04	314AAV066110	926*A60080V21***
CNPV*4212AL*	0.98	1.01	0.98	1.04	314AAV066110	926*A60080V21***
CSPH*4812AL*	0.98	1.01	0.98	1.03	314AAV066110	926*A60080V21***
CAP**4224AL*	0.96	1.04	0.98	1.03	314AAV066135	926*A60100V21***
CAP**4824AL*	0.98	1.01	0.98	1.03	314AAV066135	926*A60100V21***
CNPV*4224AL*	0.99	1.02	1.00	1.01	314AAV066135	926*A60100V21***
CNPV*4824AL*	0.98	1.01	0.98	1.04	314AAV066135	926*A60100V21***
CNPV*4824AL*	0.96	0.99	0.98	1.02	314AAV066135	926*A60100V21***
CNPV*3612AL*	0.97	1.00	0.98	1.04	314AAV066135	926*A60100V21***
CNPV*4212AL*	0.98	1.01	0.98	1.04	314AAV066135	926*A60100V21***
CSPH*4812AL*	0.98	1.01	0.98	1.03	314AAV066135	926*A60100V21***
CSPH*4812AL*	0.98	1.01	0.98	1.03	314AAV066135	926*A60100V21***
CSPH*4812AL*	0.98	1.01	0.98	1.03	314AAV066135	926*A60100V21***
CSPH*4812AL*	0.98	1.04	0.99	1.09	922*A36060E14***	922*A36060E14***
CAP**3617AL*	0.95	1.01	0.96	1.06	922*A42060E17***	922*A42060E17***
CAP**4817AL*	0.98	1.01	0.98	1.05	922*A42060E17***	922*A42060E17***
CNPV*3617AL*	0.95	1.01	0.96	1.07	922*A42060E17***	922*A42060E17***
CNPV*3617AL*	0.98	1.01	0.98	1.07	922*A42060E17***	922*A42060E17***
CNPV*3617AL*	0.95	1.01	0.96	1.07	922*A48080E17***	922*A48080E17***
CNPV*3617AL*	0.95	1.01	0.96	1.07	922*A48080E17***	922*A48080E17***
CNPV*3717AL*	0.99	1.02	0.99	1.05	922*A48080E17***	922*A48080E17***
CNPV*4217AL*	0.97	1.03	0.98	1.06	922*A48080E17***	922*A48080E17***

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

EDB °F (°C)	EVAP. AIR EWB °F (°C)	189BNV048 / FE4BNB006 Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)														
		105 (40.5)			95 (35)			85 (29.4)			75 (23.9)			65 (18.3)		
		Capacity MBtuh Total	Sensit	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sensit	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sensit	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sensit	Total Sys. KW
75 (23.9)	72 (22.2)	46.42	18.85	4.71	1110	49.80	20.23	4.17	1247	53.09	21.57	3.65	1330	56.46	22.96	3.19
	67 (19.4)	42.40	24.08	4.63		45.50	25.89	4.11		48.51	27.62	3.61		51.61	29.50	3.17
	63 (17.2)	39.38	28.15	4.57		42.27	30.30	4.06		45.08	32.33	3.58		47.99	34.60	3.15
	57 (13.9)	35.31	34.09	4.47		37.94	36.72	3.98		40.49	39.19	3.53		43.14	41.99	3.12
	72 (22.2)	46.28	23.95	4.71		49.62	25.75	4.16		52.90	27.46	3.65		56.25	29.32	3.19
80 (26.7)	67 (19.4)	42.29	29.13	4.63	1110	45.38	31.35	4.10	1247	48.38	33.45	3.61	1330	51.47	35.79	3.17
	63 (17.2)	39.31	33.18	4.57		42.20	35.74	4.06		45.01	38.14	3.58		47.91	40.87	3.15
	57 (13.9)	36.80	36.80	4.51		39.58	39.58	4.01		42.24	42.24	3.55		45.10	45.10	3.13
	72 (22.2)	29.62	12.03	2.44		31.87	12.96	2.16		34.08	13.86	1.91		36.31	14.77	1.66
	67 (19.4)	26.97	15.41	2.44		29.06	16.68	2.16		31.09	17.85	1.92		33.14	19.06	1.68
75 (23.9)	63 (17.2)	24.98	18.04	2.43	744	26.95	19.58	2.15	801	28.84	20.96	1.92	887	30.75	22.40	1.70
	57 (13.9)	22.33	21.88	2.41		24.13	23.80	2.14		25.84	25.48	1.92		27.58	27.24	1.71
	72 (22.2)	29.51	15.35	2.44		31.74	16.60	2.15		33.93	17.76	1.91		36.15	18.96	1.66
	67 (19.4)	26.80	18.70	2.44		28.98	20.29	2.15		31.00	21.72	1.92		33.04	23.21	1.68
	63 (17.2)	34.45	25.97	4.20		28.90	23.17	2.15		28.79	24.81	1.92		30.70	26.53	1.70
80 (26.7)	57 (13.9)	30.79	29.76	4.10	33.37	32.41	3.78	35.77	34.73	3.46	38.24	37.17	3.15			
	72 (22.2)	25.60	10.40	1.99	18.27	7.44	0.93	19.44	7.91	0.83	20.67	8.39	0.71			
	67 (19.4)	23.27	13.31	1.99	16.64	9.65	0.95	17.72	10.17	0.86	18.84	10.76	0.75			
	63 (17.2)	21.53	15.58	1.99	15.45	11.39	0.97	16.45	11.96	0.88	17.49	12.62	0.77			
	57 (13.9)	19.26	18.92	1.98	13.90	13.90	0.98	14.76	14.58	0.90	15.69	15.35	0.81			
75 (23.9)	72 (22.2)	25.60	10.40	1.99	662	18.26	7.44	0.93	500	19.44	7.91	0.83	508	20.67	8.39	0.71
	67 (19.4)	23.27	13.31	1.99		16.64	9.65	0.95		17.72	10.17	0.86		18.84	10.76	0.75
	63 (17.2)	21.53	15.58	1.99		15.45	11.39	0.97		16.45	11.96	0.88		17.49	12.62	0.77
	57 (13.9)	19.26	18.92	1.98		13.90	13.90	0.98		14.76	14.58	0.90		15.69	15.35	0.81
	72 (22.2)	25.60	10.40	1.99		18.26	7.44	0.93		19.44	7.91	0.83		20.67	8.39	0.71
80 (26.7)	67 (19.4)	23.27	13.31	1.99	16.64	9.65	0.95	17.72	10.17	0.86	18.84	10.76	0.75			
	63 (17.2)	21.53	15.58	1.99	15.45	11.39	0.97	16.45	11.96	0.88	17.49	12.62	0.77			
	57 (13.9)	19.26	18.92	1.98	13.90	13.90	0.98	14.76	14.58	0.90	15.69	15.35	0.81			
	72 (22.2)	25.60	10.40	1.99	18.26	7.44	0.93	19.44	7.91	0.83	20.67	8.39	0.71			
	67 (19.4)	23.27	13.31	1.99	16.64	9.65	0.95	17.72	10.17	0.86	18.84	10.76	0.75			
75 (23.9)	63 (17.2)	21.53	15.58	1.99	662	15.45	11.39	0.97	457	16.45	11.96	0.88	500	17.49	12.62	0.77
	57 (13.9)	19.26	18.92	1.98		13.90	13.23	0.98		14.63	14.27	0.90		15.69	15.35	0.81
	72 (22.2)	25.60	10.40	1.99		17.95	7.29	0.93		19.30	7.84	0.83		20.67	8.39	0.71
	67 (19.4)	23.27	13.31	1.99		16.36	9.31	0.95		17.59	10.02	0.86		18.84	10.76	0.75
	63 (17.2)	21.53	15.58	1.99		15.18	10.89	0.97		16.33	11.74	0.88		17.49	12.62	0.77
80 (26.7)	57 (13.9)	19.26	18.92	1.98	13.59	13.23	0.98	14.63	14.27	0.90	15.69	15.35	0.81			
	72 (22.2)	25.60	10.40	1.99	17.95	7.29	0.93	19.30	7.84	0.83	20.67	8.39	0.71			
	67 (19.4)	23.27	13.31	1.99	16.36	9.31	0.95	17.59	10.02	0.86	18.84	10.76	0.75			
	63 (17.2)	21.53	15.58	1.99	15.18	10.89	0.97	16.33	11.74	0.88	17.49	12.62	0.77			
	57 (13.9)	19.26	18.92	1.98	13.59	13.23	0.98	14.63	14.27	0.90	15.69	15.35	0.81			

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 5 – Compressor speed limited to stage four at 65 outdoor. **Stage 1** – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

189BNV048

COOLING INDOOR MODEL		CAPACITY		POWER		FURNACE MODEL	
Model	Capacity	Power	Model	Power	Model	Power	Model
*FE4NIB006L	1.00	1.00					
FE4NIB(F)005L	0.98	0.98					
CAP**4817AL*	1.01	1.01					
CSPH*4812AL*	0.98	1.03	315(A,J)AV048090				
CSPH*6012AL*	0.99	1.03	315(A,J)AV048090				
CAP**4821AL*	0.97	1.01	315(A,J)AV060110				
CAP**6021AL*	0.99	1.06	315(A,J)AV060110				
CNPV*4821AL*	0.97	1.01	315(A,J)AV060110				
CNPV*4821AL*	0.97	1.01	315(A,J)AV060110				
CSPH*4812AL*	0.98	1.03	315(A,J)AV060110				
CAP**4824AL*	0.97	1.03	315(A,J)AV066135				
CAP**6024AL*	0.99	1.06	315(A,J)AV066135				
CNPV*4812AL*	0.98	1.03	315(A,J)AV066135				
CNPV*4812AL*	0.99	1.06	315(A,J)AV066135				
CSPH*6024AL*	1.00	1.05	315(A,J)AV066155				
CNPV*6124AL*	1.00	1.05	315(A,J)AV066155				
CNPV*4824AL*	0.98	0.99	315(A,J)AV066155				
CNPV*4824AL*	0.98	0.99	315(A,J)AV066155				
CNPV*6124AL*	1.00	1.00	315(A,J)AV066155				
CNPV*6124AL*	0.98	0.98	315(A,J)AV066155				
CSPH*4812AL*	1.00	1.00	315(A,J)AV066155				
CAP**4821AL*	0.97	1.01	98(6*B,7*A)60080V21				
CAP**6021AL*	0.99	1.04	98(6*B,7*A)60080V21				
CNPV*4821AL*	0.97	1.06	98(6*B,7*A)60080V21				
CNPV*4821AL*	0.97	1.01	98(6*B,7*A)60080V21				
CSPH*4812AL*	0.98	1.03	98(6*B,7*A)60080V21				
CSPH*6012AL*	0.99	1.01	98(6*B,7*A)60080V21				
CAP**4824AL*	0.97	1.01	98(6*B,7*A)66100V21				
CAP**6024AL*	0.99	1.03	98(6*B,7*A)66100V21				
CNPV*4812AL*	0.98	1.04	98(6*B,7*A)66100V21				
CNPV*4812AL*	0.99	1.01	98(6*B,7*A)66100V21				
CSPH*4812AL*	0.98	1.03	98(6*B,7*A)66100V21				
CSPH*6012AL*	0.99	1.01	98(6*B,7*A)66100V21				
CAP**4824AL*	0.97	1.01	98(6*B,7*A)66120V24				
CAP**6024AL*	0.99	1.04	98(6*B,7*A)66120V24				
CNPV*4812AL*	0.98	1.04	98(6*B,7*A)66120V24				
CNPV*4812AL*	0.99	1.01	98(6*B,7*A)66120V24				
CSPH*6024AL*	1.00	1.05	98(6*B,7*A)66120V24				
CNPV*6124AL*	1.00	1.05	98(6*B,7*A)66120V24				
CNPV*4824AL*	0.97	1.01	98(6*B,7*A)66120V24				
CNPV*4824AL*	0.99	1.04	98(6*B,7*A)66120V24				
CSPH*6012AL*	0.99	1.01	98(6*B,7*A)66120V24				
CSPH*6012AL*	0.99	1.01	98(6*B,7*A)66120V24				
CAP**4824AL*	0.97	1.01	98(6*B,7*A)66120V24				
CAP**6024AL*	0.99	1.03	98(6*B,7*A)66120V24				
CNPV*4812AL*	0.98	1.03	98(6*B,7*A)66120V24				
CNPV*4812AL*	0.99	1.01	98(6*B,7*A)66120V24				
CSPH*4812AL*	0.98	1.03	98(6*B,7*A)66120V24				
CSPH*6012AL*	0.99	1.01	98(6*B,7*A)66120V24				
CAP**4821AL*	0.97	1.01	98(6*B,7*A)60060V21				
CAP**6021AL*	0.99	1.06	98(6*B,7*A)60060V21				
CNPV*4821AL*	0.97	1.06	98(6*B,7*A)60060V21				
CNPV*4821AL*	0.97	1.01	98(6*B,7*A)60060V21				
CSPH*6024AL*	1.00	1.06	98(6*B,7*A)60060V21				
CNPV*4812AL*	0.97	1.06	98(6*B,7*A)60060V21				
CNPV*4812AL*	0.97	1.01	98(6*B,7*A)60060V21				
CSPH*4812AL*	0.98	1.06	98(6*B,7*A)60060V21				
CSPH*6012AL*	0.99	1.01	98(6*B,7*A)60060V21				

2-STAGE (HI-Stage 5, Lo-Stage 2)		2-STAGE (HI-Stage 5, Lo-Stage 2)		2-STAGE (HI-Stage 5, Lo-Stage 2)		2-STAGE (HI-Stage 5, Lo-Stage 2)	
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model	Power	Furnace Model
*FV4CNB006L	1.00	1.00	1.00	1.00			
FV4CN(B)F005L	0.99	0.99	0.99	1.03			
CAP**4817AL*	0.96	1.11	0.97	1.12	313*AV048070		
CSPH*4812AL*	0.97	1.06	0.98	1.13	313*AV048070		
CAP**4821AL*	0.96	1.00	0.98	1.06	313*AV048090		
CAP**6021AL*	0.99	1.04	0.98	1.05	313*AV048090		
CNPV*4821AL*	0.97	1.01	0.98	1.06	313*AV048090		
CNPV*4821AL*	0.97	1.01	0.98	1.06	313*AV048090		
CSPH*4812AL*	0.96	1.00	0.98	1.06	313*AV048090		
CAP**4824AL*	0.97	1.01	0.98	1.06	313*AV048090		
CAP**6024AL*	0.99	1.09	0.99	1.09	313*AV060110		
CNPV*4821AL*	0.97	1.01	0.98	1.05	313*AV060110		
CNPV*4821AL*	0.97	1.01	0.98	1.05	313*AV060110		
CSPH*4812AL*	0.97	1.01	0.98	1.05	313*AV060110		
CSPH*4812AL*	0.97	1.01	0.98	1.05	313*AV060110		
CAP**6021AL*	0.99	0.99	0.99	1.04	313*AV060110		
CAP**6024AL*	0.99	0.99	0.99	1.10	313*AV060135		
CNPV*4812AL*	0.96	1.00	0.97	1.05	314AAV048090		
CNPV*4812AL*	0.99	1.04	0.98	1.04	314AAV048090		
CNPV*4812AL*	0.97	1.01	0.98	1.04	314AAV048090		
CSPH*4812AL*	0.97	1.01	0.98	1.04	314AAV048090		
CAP**4821AL*	0.99	0.99	0.99	1.02	314AAV066110		
CNPV*4821AL*	0.97	1.01	0.98	1.03	314AAV066110		
CNPV*4821AL*	0.98	1.02	0.98	1.03	314AAV066110		
CSPH*6012AL*	1.00	1.00	0.99	1.02	314AAV066135		
CAP**6024AL*	0.99	0.99	0.99	1.02	314AAV066135		
CNPV*6124AL*	0.99	1.01	0.98	1.03	314AAV066135		
CNPV*6124AL*	0.97	1.01	0.98	1.03	314AAV066135		
CSPH*6024AL*	0.99	0.99	0.99	1.02	314AAV066135		
CNPV*4824AL*	0.97	1.01	0.98	1.02	314AAV066135		
CNPV*4824AL*	0.99	0.99	0.99	1.02	314AAV066135		
CSPH*6012AL*	1.00	1.00	1.00	1.02	314AAV066135		
CAP**4817AL*	0.97	1.01	0.98	1.06	922*AV0800E17		
CSPH*4812AL*	0.97	1.01	0.98	1.07	922*AV0800E17		
CAP**4821AL*	0.99	0.99	0.98	1.03	922*AV0800E21		
CAP**6021AL*	0.99	0.99	0.98	1.03	922*AV0800E21		
CNPV*4821AL*	0.97	1.01	0.98	1.03	922*AV0800E21		
CNPV*4821AL*	0.97	1.01	0.98	1.03	922*AV0800E21		
CSPH*4812AL*	0.98	1.02	0.98	1.04	922*AV0800E21		
CSPH*4812AL*	0.98	1.02	0.98	1.04	922*AV0800E21		
CAP**6021AL*	0.99	0.99	0.98	1.03	922*AV0800E21		
CAP**6024AL*	0.99	0.99	0.98	1.03	922*AV0800E21		
CNPV*4812AL*	0.97	1.01	0.98	1.03	922*AV0800E21		
CNPV*4812AL*	0.97	1.01	0.98	1.03	922*AV0800E21		
CSPH*6012AL*	1.00	1.00	0.99	1.03	922*AV0800E21		
CAP**4824AL*	0.97	1.01	0.98	1.04	922*AV0800E21		
CAP**6024AL*	0.99	0.99	0.98	1.03	922*AV0800E21		
CNPV*6124AL*	0.99	1.04	0.99	1.03	922*AV0800E21		
CNPV*6124AL*	0.97	1.01	0.98	1.03	922*AV0800E21		
CSPH*6024AL*	0.99	0.99	0.98	1.03	922*AV0800E21		
CNPV*6124AL*	1.00	1.05	0.98	1.03	922*AV0800E21		
CNPV*6124AL*	0.97	1.01	0.98	1.04	922*AV0800E21		
CNPV*6124AL*	0.99	0.99	0.99	1.03	922*AV0800E21		
CSPH*6124AL*	1.00	1.00	0.99	1.02	922*AV0800E21		
CSPH*6124AL*	0.98	1.02	0.98	1.04	922*AV0800E21		

See notes on page 47

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

189BNV049 / CNPV#6024AL* -315(A,J)V066155 Comfort + Dehumidify Mode
Condenser Entering Air Temperature F (°C)

EDB °F (°C)	EVAP. AIR EWB °F (°C)	105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	
		Total	Sensit			Total	Sensit			Total	Sensit			Total	Sensit			Total	Sensit		Total
75 (23.9)	⁷² (22.2)	46.89	19.03	4.05	49.03	19.99	3.61	50.82	20.67	3.20	52.44	21.29	2.83	54.18	21.99	2.52	1110	1184	1196	1200	1236
	⁶⁷ (19.4)	42.37	24.54	3.98	44.50	25.79	3.55	46.13	26.47	3.14	47.59	27.05	2.77	49.16	27.84	2.47					
	⁶³ (17.2)	39.20	28.86	3.94	41.17	30.33	3.51	42.67	31.00	3.10	44.02	31.54	2.74	45.47	32.41	2.44					
	⁵⁷ (13.9)	35.30	35.19	3.89	37.12	36.99	3.46	38.37	37.72	3.05	39.47	38.20	2.69	40.73	39.17	2.39					
	⁷² (22.2)	46.59	24.56	4.05	48.93	25.81	3.61	50.72	26.49	3.20	52.34	27.07	2.83	54.08	27.87	2.52					
80 (26.7)	⁶⁷ (19.4)	42.29	30.00	3.98	44.41	31.53	3.55	46.04	32.21	3.14	47.51	32.74	2.77	49.07	33.63	2.47	1110	1184	1196	1200	1236
	⁶³ (17.2)	39.24	34.32	3.94	41.22	36.08	3.51	42.71	36.75	3.10	44.03	37.24	2.74	45.49	38.20	2.44					
	⁵⁷ (13.9)	37.41	37.41	3.92	39.33	39.33	3.49	40.47	40.47	3.07	41.42	41.42	2.71	42.65	42.65	2.41					
	⁷² (22.2)	30.83	12.50	2.33	32.85	13.32	2.05	34.76	14.09	1.82	36.68	14.86	1.61	39.12	15.87	1.43					
	⁶⁷ (19.4)	27.87	15.62	2.33	29.56	16.69	2.04	31.29	17.62	1.81	33.04	18.56	1.60	35.28	20.03	1.43					
75 (23.9)	⁶³ (17.2)	25.33	18.03	2.32	27.09	19.29	2.03	28.71	20.34	1.81	30.31	21.41	1.61	32.39	23.23	1.44	744	801	842	887	1001
	⁵⁷ (13.9)	22.97	21.65	2.32	23.97	23.17	2.03	25.40	24.38	1.81	26.83	25.65	1.61	28.78	28.01	1.44					
	⁷² (22.2)	30.77	15.75	2.33	32.78	16.79	2.05	34.69	17.72	1.82	36.60	18.67	1.61	39.04	20.14	1.43					
	⁶⁷ (19.4)	27.61	18.83	2.33	29.50	20.12	2.04	31.23	21.20	1.81	32.98	22.32	1.60	35.21	24.23	1.43					
	⁶³ (17.2)	25.33	21.25	2.32	27.10	22.73	2.03	28.71	23.93	1.81	30.32	25.17	1.61	32.41	27.44	1.43					
80 (26.7)	⁵⁷ (13.9)	23.54	23.54	2.32	25.21	25.21	2.03	26.63	26.63	1.81	28.08	28.08	1.61	30.35	30.35	1.44	744	801	842	887	1001
	⁷² (22.2)	23.83	9.66	1.63	17.67	7.17	1.02	19.19	7.80	0.93	20.76	8.45	0.80	22.37	9.11	0.61					
	⁶⁷ (19.4)	21.23	12.07	1.64	15.73	8.59	1.01	17.11	9.31	0.93	18.52	10.05	0.81	19.97	10.81	0.63					
	⁶³ (17.2)	19.35	13.95	1.64	14.34	9.71	1.00	15.61	10.49	0.93	16.90	11.30	0.82	18.23	12.13	0.66					
	⁵⁷ (13.9)	17.03	16.78	1.63	12.49	11.34	0.99	13.61	12.23	0.94	14.76	13.14	0.84	15.94	14.09	0.69					
75 (23.9)	⁷² (22.2)	23.77	12.23	1.63	17.63	8.73	1.02	19.16	9.45	0.93	20.73	10.20	0.80	22.33	10.97	0.61	662	457	482	508	535
	⁶⁷ (19.4)	21.18	14.61	1.64	15.71	10.14	1.01	17.08	10.95	0.93	18.49	11.79	0.81	19.94	12.65	0.63					
	⁶³ (17.2)	19.36	16.50	1.64	14.33	11.25	1.00	15.59	12.13	0.93	16.89	13.04	0.82	18.22	13.97	0.66					
	⁵⁷ (13.9)	18.08	18.08	1.63	12.74	12.74	0.99	13.79	13.79	0.94	14.88	14.88	0.83	16.03	15.95	0.69					
	⁷² (22.2)	23.83	9.66	1.63	17.67	7.17	1.02	19.19	7.80	0.93	20.76	8.45	0.80	22.37	9.11	0.61					

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 5 – Compressor speed limited to stage four at 65 outdoor. **Stage 1** – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE CONTINUED

189BNV049

COOLING IN-DOOR MODEL	CAPACITY	POWER	FURNACE MODEL
*CNPV*6024AL*	1.00	1.00	315(A-JJA)V066135
FE4ANB,F1005L	0.99	0.99	
FE4ANB006L	1.00	1.00	
CAP**4821AL*	0.97	1.03	98(6*B,7*A)60080V21***
CAP**4824AL*	0.98	1.00	98(6*B,7*A)60080V21***
CAP**4824AL*	0.98	1.00	98(6*B,7*A)66120V24***
CAP**4824AL*	0.98	1.00	98(6*B,7*A)66120V24***
CAP**4824AL*	0.98	0.98	315(A-JJA)V060110
CAP**4824AL*	0.98	0.98	315(A-JJA)V066135
CAP**4824AL*	0.98	0.98	315(A-JJA)V066155
CAP**6021AL*	1.00	1.00	315(A-JJA)V048090
CAP**6021AL*	0.99	1.06	98(6*B,7*A)60080V21***
CAP**6024AL*	1.00	1.00	98(6*B,7*A)60080V21***
CAP**6024AL*	1.00	1.00	98(6*B,7*A)66120V24***
CAP**6024AL*	1.00	1.00	315(A-JJA)V060110
CAP**6024AL*	1.00	1.00	315(A-JJA)V066135
CAP**6024AL*	1.00	1.00	315(A-JJA)V066155
CNPV*4821AL*	0.98	1.04	98(6*B,7*A)60080V21***
CNPV*4821AL*	0.99	0.99	98(6*B,7*A)60080V21***
CNPV*6024AL*	1.00	1.00	98(6*B,7*A)66120V24***
CNPV*6024AL*	1.00	1.00	98(6*B,7*A)66120V24***
CNPV*6024AL*	1.00	1.00	315(A-JJA)V060110
CNPV*6124AL*	1.00	1.00	98(6*B,7*A)60080V21***
CNPV*6124AL*	1.01	0.97	315(A-JJA)V066135
CNPV*6124AL*	1.01	0.97	315(A-JJA)V066155

2-STAGE (Hi-Stage 5, Lo-Stage 2)						
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model	
*CNPV*6024AL*	1.00	1.00	1.00	1.00	315(A-JJA)V066155	
FE4ANB,F1005L	0.99	0.99	1.00	1.02		
FE4ANB006L	1.01	0.99	1.01	0.99		
FV4CNB,F1005L	1.00	0.99	1.00	1.02		
FV4CNB006L	1.01	0.99	1.01	0.99		
CAP**4821AL*	0.97	0.99	0.98	1.05	313*AV048090	
CAP**6021AL*	1.00	1.03	1.00	1.04	313*AV048090	
CNPV*4821AL*	0.98	1.02	0.99	1.05	313*AV048090	
CNPV*4821AL*	0.98	1.01	0.99	1.05	313*AV048090	
CSPH*4812AL*	0.98	1.00	0.99	1.05	313*AV048090	
CSPH*6012AL*	1.00	1.03	1.01	1.04	313*AV048090	
CAP**4821AL*	0.97	0.99	0.98	1.04	313*AV060110	
CAP**6021AL*	1.00	0.98	1.00	1.04	313*AV060110	
CNPV*4821AL*	0.98	1.00	0.99	1.04	313*AV060110	
CNPV*4821AL*	0.98	1.00	0.99	1.04	313*AV060110	
CSPH*4812AL*	0.98	1.00	1.00	1.05	313*AV060110	
CSPH*6012AL*	1.00	0.98	1.01	1.04	313*AV060110	
CAP**4821AL*	0.97	0.99	0.98	1.04	314*AAV048090	
CAP**6021AL*	1.00	1.03	0.99	1.03	314*AAV048090	
CNPV*4821AL*	0.98	1.01	0.98	1.03	314*AAV048090	
CNPV*4821AL*	0.98	1.00	0.98	1.03	314*AAV048090	
CSPH*4812AL*	0.99	1.01	0.99	1.04	314*AAV048090	
CSPH*6012AL*	1.00	1.03	1.00	1.03	314*AAV048090	
CAP**4821AL*	0.98	1.00	0.98	1.02	314*AAV066110	
CAP**6021AL*	1.00	1.03	1.00	1.02	314*AAV066110	
CNPV*4821AL*	0.98	1.00	0.99	1.02	314*AAV066110	
CNPV*4821AL*	0.98	1.00	0.99	1.02	314*AAV066110	
CSPH*4812AL*	0.99	1.01	0.99	1.02	314*AAV066110	
CSPH*6012AL*	1.01	0.99	1.01	1.02	314*AAV066110	
CAP**4824AL*	0.98	1.00	0.98	1.02	314*AAV066135	
CAP**6024AL*	1.00	0.98	0.99	1.01	314*AAV066135	
CNPV*6024AL*	1.00	1.00	1.00	1.01	314*AAV066135	
CNPV*6024AL*	1.00	1.00	1.00	1.02	314*AAV066135	
CNPV*4824AL*	1.00	0.99	1.00	1.01	314*AAV066135	
CNPV*6124AL*	1.01	0.99	1.02	1.01	314*AAV066135	
CSPH*4812AL*	0.99	1.01	0.99	1.02	314*AAV066135	
CSPH*6012AL*	1.00	0.98	1.01	1.02	314*AAV066135	
CAP**4817AL*	0.98	1.00	0.98	1.05	922*A48080E17***	
CSPH*6012AL*	1.00	1.03	1.00	1.05	922*A48080E17***	
CAP**4821AL*	0.98	1.00	0.98	1.03	922*A60080E21***	
CAP**6021AL*	1.00	1.03	0.99	1.02	922*A60080E21***	
CNPV*4821AL*	0.98	1.00	0.98	1.02	922*A60080E21***	
CNPV*4821AL*	0.98	1.00	0.98	1.02	922*A60080E21***	
CSPH*4812AL*	0.99	1.01	0.99	1.03	922*A60080E21***	
CSPH*6012AL*	1.01	1.00	1.00	1.01	922*A60080E21***	
CAP**4821AL*	0.98	1.00	0.98	1.03	922*A60100E21***	
CAP**6021AL*	1.00	1.03	0.99	1.02	922*A60100E21***	
CNPV*4821AL*	0.98	1.00	0.98	1.02	922*A60100E21***	
CNPV*4821AL*	0.98	1.00	0.98	1.02	922*A60100E21***	
CSPH*4812AL*	0.99	1.01	0.99	1.03	922*A60100E21***	
CSPH*6012AL*	1.01	1.00	1.00	1.02	922*A60100E21***	

2-STAGE (Hi-Stage 5, Lo-Stage 2)						
Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model	
CAP**4824AL*	0.98	1.00	0.98	1.03	922*A60120E24***	
CAP**6024AL*	1.00	1.03	0.99	1.02	922*A60120E24***	
CNPV*6024AL*	1.00	1.03	1.00	1.02	922*A60120E24***	
CNPV*4824AL*	0.98	1.00	0.98	1.02	922*A60120E24***	
CNPV*6024AL*	1.00	1.03	1.00	1.02	922*A60120E24***	
CNPV*6124AL*	1.01	1.00	1.01	1.02	922*A60120E24***	
CNPV*6124AL*	1.01	1.00	1.01	1.02	922*A60120E24***	
CSPH*4812AL*	0.98	1.01	0.99	1.03	922*A60120E24***	
CSPH*6012AL*	1.01	1.04	1.00	1.02	922*A60120E24***	
CAP**4821AL*	0.97	0.99	0.96	1.01	925*A60080E21***	
CAP**4821AL*	0.97	0.99	0.99	1.10	925*A60100E21***	
CSPH*4812AL*	0.98	1.00	1.00	1.10	925*A60100E21***	
CAP**4821AL*	0.97	0.99	0.98	1.07	926*A60080V21***	
CAP**6021AL*	0.99	1.01	1.00	1.07	926*A60080V21***	
CNPV*4821AL*	0.98	1.01	0.99	1.07	926*A60080V21***	
CNPV*4821AL*	0.98	1.00	0.99	1.07	926*A60080V21***	
CSPH*4812AL*	0.98	1.00	0.99	1.07	926*A60080V21***	
CSPH*6012AL*	1.00	1.03	1.01	1.07	926*A60080V21***	
CAP**4821AL*	0.97	0.99	0.98	1.06	926*A60100V21***	
CAP**6021AL*	0.98	1.01	1.00	1.06	926*A60100V21***	
CNPV*4821AL*	0.98	1.00	0.99	1.06	926*A60100V21***	
CNPV*4821AL*	0.98	1.00	0.99	1.06	926*A60100V21***	
CSPH*4812AL*	0.98	1.00	1.00	1.09	926*A60100V21***	
CSPH*6012AL*	1.00	1.03	1.01	1.06	926*A60100V21***	
CAP**4824AL*	0.97	0.99	0.98	1.05	926*A66120V24***	
CNPV*6024AL*	0.99	1.01	1.01	1.06	926*A66120V24***	
CNPV*4824AL*	0.98	1.00	0.99	1.06	926*A66120V24***	
CNPV*6024AL*	0.99	1.01	1.01	1.06	926*A66120V24***	
CNPV*6124AL*	1.01	1.04	1.02	1.05	926*A66120V24***	
CNPV*6124AL*	1.01	1.04	1.02	1.05	926*A66120V24***	
CSPH*4812AL*	0.98	1.00	1.00	1.11	926*A66120V24***	
CSPH*6012AL*	1.00	1.03	1.01	1.06	926*A66120V24***	

See notes on page 47

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

1895AV060 / FE4BNB06L Comfort + Dehumidify Mode
Condenser Entering Air Temperature F (°C)

EDB °F (°C)	EVAP. AIR EWB °F (°C)	105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	
		Total	Sensit			Total	Sensit			Total	Sensit			Total	Sensit			Total	Sensit		Total
STAGE 5																					
75 (23.9)	⁷²	57.74	23.45	6.51	61.60	25.02	5.73	65.43	26.57	5.06	69.11	28.06	4.43	71.73	29.06	3.80					
	⁶⁷	52.75	29.96	6.32	56.26	31.94	5.56	59.74	33.92	4.89	63.08	35.74	4.28	65.39	36.48	3.66					
	⁶³	49.06	35.05	6.19	52.31	37.35	5.43	55.53	39.67	4.77	58.62	41.74	4.17	60.75	42.26	3.56					
	⁵⁷	44.14	42.48	6.02	47.05	45.25	5.27	49.93	48.04	4.62	52.69	50.49	4.02	54.52	50.74	3.43					
80 (26.7)	⁷²	57.61	29.82	6.52	61.47	31.80	5.74	65.28	33.78	5.06	68.97	35.61	4.43	71.59	36.37	3.80					
	⁶⁷	52.65	36.25	6.32	56.15	38.64	5.56	59.62	41.04	4.89	62.96	43.19	4.28	65.29	43.67	3.66					
	⁶³	48.99	41.31	6.19	52.23	44.02	5.43	55.45	46.75	4.77	58.54	49.15	4.17	60.67	49.42	3.56					
	⁵⁷	45.90	45.90	6.08	48.92	48.92	5.33	51.93	51.93	4.67	54.72	54.72	4.07	55.91	55.91	3.46					
STAGE 3																					
75 (23.9)	⁷²	36.98	15.01	3.25	39.25	15.94	2.79	41.77	16.95	2.44	44.28	17.97	2.13	47.05	19.11	1.87					
	⁶⁷	33.40	19.03	3.22	35.55	20.23	2.75	37.83	21.50	2.39	40.10	22.76	2.09	42.62	24.30	1.84					
	⁶³	30.77	22.16	3.21	32.82	23.59	2.72	34.94	25.04	2.37	37.04	26.50	2.06	39.38	28.36	1.81					
	⁵⁷	27.31	26.75	3.18	29.19	28.48	2.69	31.09	30.22	2.34	32.99	31.96	2.04	35.10	34.26	1.79					
80 (26.7)	⁷²	36.89	19.10	3.25	39.15	20.27	2.79	41.66	21.53	2.44	44.17	22.80	2.13	46.93	24.34	1.87					
	⁶⁷	33.32	23.06	3.22	35.47	24.51	2.75	37.74	26.01	2.39	40.02	27.53	2.09	42.53	29.47	1.84					
	⁶³	30.72	26.18	3.21	32.77	27.85	2.72	34.89	29.54	2.37	36.99	31.25	2.06	39.33	33.50	1.81					
	⁵⁷	28.74	28.74	3.19	30.65	30.65	2.70	32.58	32.58	2.35	34.53	34.53	2.05	36.85	36.85	1.80					
STAGE 1																					
75 (23.9)	⁷²	27.11	11.00	2.21	19.91	8.07	1.22	20.99	8.50	1.01	22.49	9.11	0.80	24.02	9.73	0.59					
	⁶⁷	24.28	13.80	2.21	17.69	10.04	1.21	18.67	10.45	1.01	20.04	11.19	0.81	21.43	11.97	0.61					
	⁶³	22.21	15.99	2.20	16.05	11.57	1.21	16.97	11.96	1.01	18.23	12.81	0.82	19.53	13.71	0.62					
	⁵⁷	19.51	19.20	2.20	13.98	13.85	1.20	14.76	14.19	1.02	15.88	15.20	0.84	17.03	16.27	0.65					
80 (26.7)	⁷²	27.04	13.93	2.21	19.86	10.20	1.22	20.94	10.61	1.01	22.43	11.35	0.80	23.96	12.13	0.59					
	⁶⁷	24.22	16.71	2.21	17.65	12.16	1.21	18.63	12.54	1.01	19.99	13.42	0.81	21.39	14.35	0.61					
	⁶³	22.18	18.88	2.20	16.04	13.68	1.21	16.95	14.04	1.01	18.21	15.03	0.82	19.50	16.08	0.62					
	⁵⁷	20.65	20.65	2.20	14.90	14.90	1.20	15.50	15.50	1.02	16.63	16.63	0.83	17.82	17.82	0.64					

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage
Stage 5 – Compressor speed limited to stage four at 65 outdoor. **Stage 1** – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 47

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE CONTINUED

189ENV060

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL	2-STAGE (Hi-Stage 5, Lo-Stage 2)			Cooling Indoor Model	High Speed Cap.	Power	Low Speed Cap.	Power	Furnace Model
				High Speed Cap.	Power	Low Speed Cap.						
*FEZANB006L	1.00	1.00										
CAP**6021AL*	0.99	0.99	315(A/JA)V060110	1.00	1.00	1.00	*FV4CNB006L	1.00	1.00	1.00	1.00	313*AV060110
CAP**6024AL*	0.99	0.99	315(A/JA)V060110	1.01	1.06	1.01	CAP**6021AL*	1.01	1.06	1.01	1.07	313*AV060110
CNPV*6024AL*	0.99	1.04	315(A/JA)V060110	1.01	1.06	1.00	CSPH*6012AL*	1.02	1.07	1.00	1.04	313*AV060110
CNPV*6024AL*	0.98	0.98	315(A/JA)V060110	1.01	1.06	1.00	CAP**6024AL*	1.01	1.06	1.00	1.11	313*AV060135
CNPV*6124AL*	1.00	1.00	315(A/JA)V060110	1.01	1.06	1.01	CNPV*6024AL*	1.01	1.06	1.01	1.06	313*AV060135
CSPH*6012AL*	0.99	1.00	315(A/JA)V060110	1.01	1.06	1.01	CNPV*6124AL*	1.01	1.06	1.01	1.12	313*AV060135
CAP**6024AL*	0.99	0.99	315(A/JA)V066135	1.00	1.05	1.01	CNPV*6024AL*	1.00	1.05	1.01	1.06	313*AV060135
CNPV*6024AL*	0.99	0.99	315(A/JA)V066135	1.02	1.07	1.00	CNPV*6124AL*	1.02	1.07	1.00	1.03	313*AV060135
CNPV*6124AL*	0.98	0.98	315(A/JA)V066135	1.01	1.06	1.01	CSPH*6012AL*	1.01	1.06	1.01	1.07	314AAV066110
CNPV*6024AL*	1.00	1.00	315(A/JA)V066135	1.02	1.07	1.00	CSPH*6012AL*	1.02	1.07	1.00	1.04	314AAV066110
CNPV*6024AL*	1.00	1.00	315(A/JA)V066155	1.01	1.06	1.01	CAP**6024AL*	1.01	1.06	1.01	1.06	314AAV066135
CNPV*6124AL*	1.00	1.00	315(A/JA)V066155	1.01	1.06	1.01	CNPV*6124AL*	1.01	1.06	1.01	1.06	314AAV066135
CNPV*6024AL*	0.99	0.99	315(A/JA)V066155	1.00	1.05	1.01	CNPV*6024AL*	1.00	1.05	1.01	1.06	314AAV066135
CNPV*6124AL*	1.00	1.00	315(A/JA)V066155	1.02	1.07	1.00	CNPV*6124AL*	1.02	1.07	1.00	1.04	314AAV066135
CSPH*6012AL*	1.00	1.00	315(A/JA)V066155	1.01	1.06	1.01	CAP**6021AL*	1.01	1.06	1.01	1.07	922*A60080E21***
CAP**6021AL*	0.99	1.04	98(6*7*A)60080V21***	1.02	1.07	1.00	CSPH*6012AL*	1.02	1.07	1.00	1.05	922*A60080E21***
CAP**6024AL*	0.99	1.04	98(6*7*A)60080V21***	1.01	1.06	1.01	CAP**6021AL*	1.01	1.06	1.01	1.07	922*A60100E21***
CNPV*6024AL*	0.99	1.04	98(6*7*A)60080V21***	1.01	1.06	1.00	CSPH*6012AL*	1.01	1.06	1.00	1.05	922*A60100E21***
CNPV*6124AL*	0.99	1.04	98(6*7*A)60080V21***	1.01	1.06	1.01	CAP**6024AL*	1.01	1.06	1.01	1.07	922*A60100E21***
CSPH*6012AL*	0.99	1.04	98(6*7*A)60080V21***	1.01	1.06	1.01	CNPV*6024AL*	1.01	1.06	1.01	1.07	922*A60120E24***
CAP**6024AL*	0.99	1.04	98(6*7*A)60080V21***	1.00	1.05	1.01	CNPV*6124AL*	1.00	1.05	1.01	1.04	922*A60120E24***
CNPV*6024AL*	0.99	1.04	98(6*7*A)60080V21***	1.02	1.07	1.00	CNPV*6024AL*	1.02	1.07	1.00	1.04	922*A60120E24***
CNPV*6124AL*	0.99	1.04	98(6*7*A)60080V21***	0.99	1.04	1.01	CSPH*6012AL*	0.99	1.04	1.01	1.11	925*A60080E21***
CNPV*6024AL*	0.99	1.04	98(6*7*A)60080V21***	1.00	1.05	1.01	CSPH*6012AL*	1.00	1.05	1.01	1.10	925*A60080E21***
CNPV*6124AL*	0.98	0.98	98(6*7*A)60080V21***	1.00	1.05	1.01	CAP**6024AL*	1.00	1.05	1.01	1.11	925*A60120E24***
CSPH*6012AL*	0.99	1.00	98(6*7*A)60080V21***	1.00	1.05	1.01	CNPV*6124AL*	1.00	1.05	1.01	1.11	925*A60120E24***
CAP**6024AL*	0.99	1.04	98(6*7*A)60080V21***	1.00	1.05	1.01	CNPV*6024AL*	1.00	1.05	1.01	1.10	925*A60120E24***
CNPV*6024AL*	0.98	1.03	98(6*7*A)60080V21***	1.00	1.05	1.01	CSPH*6012AL*	1.00	1.05	1.01	1.09	925*A60120E24***
CNPV*6124AL*	0.99	1.04	98(6*7*A)60080V21***	1.00	1.05	1.01	CSPH*6012AL*	1.00	1.05	1.01	1.10	925*A60120E24***
CSPH*6012AL*	0.99	1.04	98(6*7*A)60080V21***	1.00	1.05	1.01	CAP**6024AL*	1.00	1.05	1.01	1.10	925*A60120E24***
CNPV*6024AL*	0.98	1.03	98(6*7*A)60080V21***	0.99	1.04	1.01	CNPV*6124AL*	0.99	1.04	1.01	1.11	926*A60100V21***
CNPV*6124AL*	0.98	1.03	98(6*7*A)60080V21***	1.00	1.05	1.01	CNPV*6024AL*	1.00	1.05	1.01	1.11	926*A60120V24***
CSPH*6012AL*	0.98	1.03	98(6*7*A)60080V21***	1.00	1.05	1.01	CSPH*6012AL*	1.00	1.05	1.01	1.10	926*A60120V24***
CAP**6024AL*	0.98	1.03	98(6*7*A)60080V21***	1.00	1.05	1.01	CNPV*6124AL*	1.00	1.05	1.01	1.09	926*A60120V24***
CNPV*6024AL*	0.98	1.09	98(6*7*A)60080V21***	1.00	1.05	1.01	CNPV*6024AL*	1.00	1.05	1.01	1.08	926*A60120V24***
CNPV*6124AL*	0.97	1.02	98(6*7*A)60080V21***	1.00	1.05	1.01	CSPH*6012AL*	1.00	1.05	1.01	1.09	926*A60120V24***
CNPV*6024AL*	0.99	1.04	98(6*7*A)60080V21***	0.99	1.04	1.01	CAP**6024AL*	0.99	1.04	1.01	1.09	926*A60120V24***
CSPH*6012AL*	0.99	1.04	98(6*7*A)60080V21***	1.01	1.06	1.01	CNPV*6124AL*	1.01	1.06	1.01	1.07	926*A60120V24***
				1.01	1.06	1.01	CNPV*6024AL*	1.01	1.06	1.01	1.11	926*A60120V24***
				1.01	1.06	1.01	CSPH*6012AL*	1.01	1.06	1.01	1.11	926*A60120V24***

NOTES:

- * Tested combination.
- † Total and sensible capacities are net capacities. Blower motor heat has been subtracted.
- ‡ Sensible capacities are shown for both 80°F (27°C) and 75°F (23.4°C) entering air at the indoor coil.
- § For sensible capacities at other than these, deduct 835 Btuh (245 kW) per 1000 CFM (480 L/S) of indoor coil air for each degree below reference temperature, or add 835 Btuh (245 kW) per 1000 CFM (480 L/S) of indoor coil air for each degree above reference temperature.
- # Detailed cooling capacities are based on indoor and outdoor unit at the same elevation per AHRI standard 210/240-2008. If additional tubing length and/or indoor unit is located above outdoor unit, a slight variation in capacity may occur.
- ** System kw is total of indoor and outdoor unit kilowatts.
- *** When the required data falls between the published data, interpolation may be performed. Extrapolation is not an acceptable practice.
- EWB** — Entering Wet Bulb

GUIDE SPECIFICATIONS

GENERAL

System Description

Outdoor-mounted, air-cooled, split-system air conditioning unit suitable for ground or rooftop installation. Unit consists of a hermetic compressor, an air-cooled coil, forward-swept blade propeller-type condenser fan, and a control box. Unit will discharge supply air upward as shown on contract drawings. Unit will be used in a refrigeration circuit to match up to a packaged fan coil or coil unit.

Quality Assurance

- Unit will be rated in accordance with the latest edition of AHRI Standard 240.
- Unit will be certified for capacity and efficiency, and listed in the latest AHRI directory.
- Unit construction will comply with latest edition of ASHRAE and with NEC.
- Unit will be constructed in accordance with UL standards and will carry the UL label of approval. Unit will have C-UL approval.
- Unit cabinet will be capable of withstanding Federal Test Method Standard No. 141 (Method 6061) 500-hr salt spray test.
- Air-cooled condenser coils are pressure tested and the outdoor units are leak tested.
- Unit constructed in ISO9001 approved facility.

Delivery, Storage, and Handling

- Unit will be shipped as single package only and is stored and handled per unit manufacturer's recommendations.

Warranty (for inclusion by specifying engineer)

- U.S. and Canada only.

PRODUCTS

Equipment

- Factory-assembled, single-piece, air-cooled air conditioning unit. Contained within the unit enclosure is all factory wiring, piping, controls, compressor, refrigerant charge Puron® (R-410A) refrigerant, and special features required prior to field start-up.

Unit Cabinet

- Unit cabinet will be constructed of galvanized steel, bonderized, and coated with a powder coat paint.

Fans

- Condenser fan will be direct-drive propeller type, forward swept blade, discharging air upward.

AIR-COOLED, SPLIT-SYSTEM AIR CONDITIONER

189BNV

- Condenser fan motors will be totally enclosed, 1-phase type with class B insulation and permanently lubricated.
- Shafts will be corrosion resistant.
- Fan blades will be statically and dynamically balanced.
- Condenser fan openings will be equipped with coated steel wire safety guards.

Compressor

- Compressor will be hermetically sealed.
- Compressor will be mounted on rubber vibration isolators.
- Compressor will be covered with a sound absorbing blanket.

Condenser Coil

- Condenser coil will be air cooled.
- Coil will be constructed of aluminum fins mechanically bonded to copper tubes which are then cleaned, dehydrated, and sealed.

Refrigeration Components

- Refrigeration circuit components will include liquid-line front-seating shutoff valve with sweat connections, vapor-line front-seating shutoff valve with sweat connections, system charge of Puron® (R-410A) refrigerant, POE compressor oil, accumulator, charge compensator, electronic expansion valve, and reversing valve.
- Unit will be equipped with high-pressure switch, suction pressure transducer, and filter drier for Puron® refrigerant.

Operating Characteristics

- The capacity of the unit will meet or exceed _____ Btuh at a suction temperature of _____ °F (°C). The power consumption at full load will not exceed _____ kW.
- Combination of the unit and the evaporator or fan coil unit will have a total net cooling capacity of _____ Btuh or greater at conditions of _____ CFM entering air temperature at the evaporator at _____ °F (°C) wet bulb and _____ °F (°C) dry bulb, and air entering the unit at _____ °F (°C).
- The system will have a SEER of _____ Btuh/watt or greater at DOE conditions.

Electrical Requirements

- Nominal unit electrical characteristics will be _____ v, single phase, 60 hz. The unit will be capable of satisfactory operation within voltage limits of _____ v to _____ v.
- Unit electrical power will be single point connection.
- Control circuit will be 24v.
- Compliant with IEC 61000-4-5 Transient Surge Requirement.

Special Features

- Refer to section of this literature identifying accessories and descriptions for specific features and available enhancements.
- Evolution control with appropriate software version is required for full featured operation.

SYSTEM DESIGN SUMMARY

1. Intended for outdoor installation with free air inlet and outlet. Outdoor fan external static pressure available is less than 0.01-in. wc.
2. This product is not qualified for low ambient cooling operation.
Minimum cooling outdoor operating temperatures:
 - Communicating systems: 40°F (4.44°C)
 - Non-communicating systems: 55°F (12.8°C)
3. For reliable operation, unit should be level in all horizontal planes.
4. This unit is qualified for up to 100 ft (30.5 m) equivalent length of line set without additional accessories.
5. If any refrigerant tubing is buried, provide a 6 in. (152.4 mm) vertical rise to the valve connections at the unit. Refrigerant tubing lengths up to 36 in. (914.4 mm) may be buried without further consideration. Do not bury refrigerant lines longer than 36 in. (914.4 mm).
6. Use only copper wire for electric connection at unit. Aluminum and clad aluminum are not acceptable for the type of connector provided.
7. Do not apply capillary tube indoor coils to these units.
8. Puron refrigerant TXV required on indoor coil.

