



**Indoor Model: 40MAHBQ09XA3**

## Submittal Data

Job Data:  Location:

Buyer:  Buyer P.O. #:  Carrier #:

Unit Number:  Model Number:

Performance Data Certified By:  Date:



Performance  
SERIES

### STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Turbo Mode
- Four fan speeds
- Sleep Mode
- Relative Humidity Sensor
- Intelligent Eye (Occupancy Sensor)
- ECO Mode
- Up-Down Louver control (fixed or swing)
- Follow Me (senses temperature at handheld remote)
- Heating Setback (46° F Heating Mode)
- Quiet indoor operation
- Aluminum Golden Hydrophilic pre-coated fins

### CONTROLS:

- Wireless Remote Controller included with indoor unit

### LIMITED WARRANTY\*

- 10 year limited to original purchaser on compressor and parts upon timely registration, otherwise 5 years
- \*For residential applications. See warranty for full details.

|                 |  |                                     |               |
|-----------------|--|-------------------------------------|---------------|
| System          | Size   | 9                                   |               |
|                 | Indoor Model                                   | 40MAHBQ09XA3                        |               |
| Electrical      | Voltage, Phase, Cycle                          | V/Ph/Hz                             | 208/230-1-60  |
|                 | Power Supply                                   | Indoor unit powered by outdoor unit |               |
|                 | MCA  | A.                                  | 0.3125        |
| Controls        | Wireless Remote Controller (°F/°C Convertible) | Standard                            |               |
|                 | Wired Remote Controller (°F/°C Convertible)    | Optional                            |               |
| Operating Range | Cooling Indoor DB Min -Max                     | °F(°C)                              | 63~90 (17~32) |
|                 | Heating Indoor DB Min -Max                     | °F(°C)                              | 32~86 (0~30)  |
| Piping          | Pipe Connection Size - Liquid                  | in (mm)                             | 1/4 (6.35)    |
|                 | Pipe Connection Size - Suction                 | in (mm)                             | 3/8 (9.52)    |

|                            |                                    |              |                 |
|----------------------------|------------------------------------|--------------|-----------------|
| Indoor Coil                | Face Area                          | Sq. Ft.      | 2.15            |
|                            | No. Rows                           | 2            |                 |
|                            | Fins per inch                      | 20           |                 |
|                            | Circuits                           | 3            |                 |
| Indoor                     | Unit Width                         | in (mm)      | 31.3 (795)      |
|                            | Unit Height                        | in (mm)      | 11.61 (295)     |
|                            | Unit Depth                         | in (mm)      | 8.86 (225)      |
|                            | Net Weight                         | lbs (kg)     | 22.71 (10.3)    |
|                            | Number of Fan Speeds               | 4            |                 |
|                            | Airflow (lowest to highest)        | CFM          | 176/229/335/382 |
|                            | Sound Pressure (lowest to highest) | dB(A)        | 32/34/38/47     |
|                            | Air throw Data                     | ft (m)       | 24.9 (7.6)      |
|                            | Moisture removal                   | Pint/h (L/h) | 0.75 (0.35)     |
| Field Drain Pipe Size O.D. | in (mm)                            | 0.625 (16)   |                 |



Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.  
For Compatibility See Product Data

## Accessories

|              |  |
|--------------|--|
| KSACN0801AAA | Wired Remote Control 7 Day Programmable  |
| KSACN0101AAA | Wired Remote Control with Timer Function |
| KSAIF0601AAA | Wi-Fi™ Kit High Wall Mid-Tier            |
| KSAIC0301230 | 24V Interface Kit 230V                   |

## Construction View

Indoor Model: **40MAHBQ09XA3**

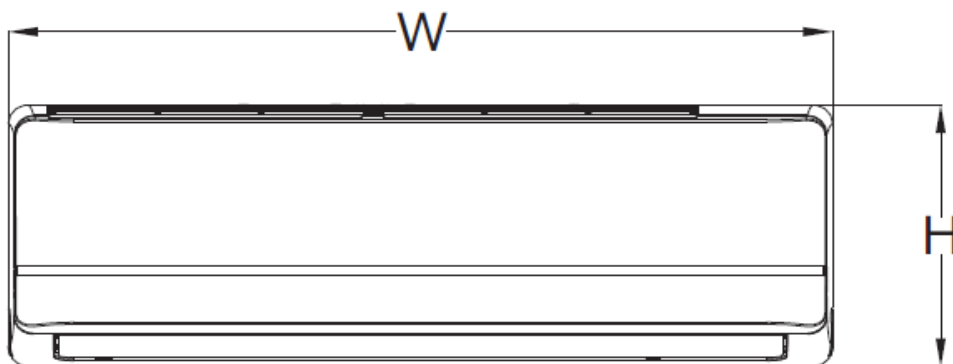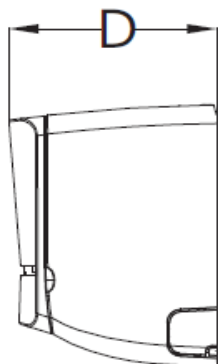

|             |          |              |
|-------------|----------|--------------|
| Unit Width  | in (mm)  | 31.3 (795)   |
| Unit Height | in (mm)  | 11.61 (295)  |
| Unit Depth  | in (mm)  | 8.86 (225)   |
| Net Weight  | lbs (kg) | 22.71 (10.3) |

