




# i-Vu<sup>®</sup> Building Automation System TruVu<sup>™</sup> MPC Processor

Part Number: TV-MPCXP

TruVu

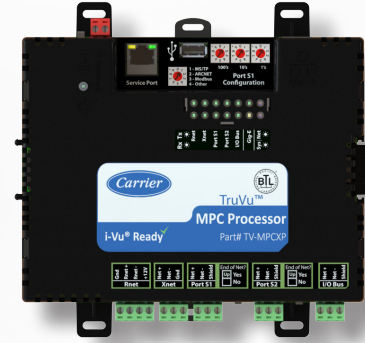

The Carrier<sup>®</sup> TruVu<sup>™</sup> MPC Processor provides multi-purpose monitoring and control for a variety of HVAC system applications. Flexible and versatile, it supports multiple I/O configurations for accomplishing both common and custom HVAC control strategies.



The TruVu MPC Processor features built-in routing and integration capabilities, along with support for up to nine TruVu MPC I/O expansion modules and a total of 180 input/output points.

## Application Features

- Comprehensive library of factory-engineered control programs available for complete air-side and water-side system control
- Graphically programmable using the Snap programming tool
- Supports Carrier communicating room sensors, which allow for local setpoint adjustment and local overrides

## Hardware Features

- Gig-E 1000 Mbps Ethernet port supports BACnet/IP, Modbus TCP/IP and DHCP addressing
- Local access 10/100 Ethernet port for system startup and troubleshooting
- Real-time clock keeps time in the event of power failure for up to 3 days without batteries
- Capable of system or stand-alone operation
- Can be din-rail or screw mounted
- Supports native BACnet MSTP and BACnet over ARC 156 communications

## System Benefits

- Fully plug-and-play with the Carrier i-Vu building automation system
- Supports demand limiting and optimal start for maximum energy savings
- Supports up to 1,500 third-party BACnet points and up to 200 Modbus points for system integration
- Supports BACnet Foreign Device Registration (FDR)

## BACnet Features

- BACnet Testing Laboratories (BTL) certified
- Conforms to the BACnet Building Controller (B-BC), BACnet Router (B-RTR), and BACnet BBMD (B-BBMD), standard device profiles
- Supports BACnet interoperability and routing with and between BACnet/IP, BACnet MS/TP, and BACnet over ARC156
- High-speed, BACnet over ARC156 communications delivers information at the speeds necessary for effective data transfer
- Can serve as a BACnet Broadcast Management Device (BBMD)
- Supports BACnet Foreign Device Registration (FDR)

# i-Vu<sup>®</sup> Building Automation System

## TruVu<sup>™</sup> MPC Processor

Part Number: TV-MPCXP



### Specifications

<b>BACnet Support</b>	Conforms to the BACnet Building Controller (B-BC), BACnet Router (B-RTR), and BACnet BBMD (B-BBMD) device profiles as defined in BACnet 135-2012 Annex L, Protocol Revision 14
<b>Communication Ports</b>	<b>Gig-E:</b> 10/100/1000 BaseT Ethernet port for BACnet/IP and/or BACnet/Ethernet and/or Modbus TCP/IP communication <b>S1 ARC/MSTP:</b> High-speed EIA-485 port with End of Net switch for connecting one of the following: <ul style="list-style-type: none"><li>• BACnet ARCnet network at 156 kbps</li><li>• BACnet MS/TP network at 9.6, 19.2, 38.4, 57.6, 76.8, or 115.2 kbps</li><li>• Modbus RTU at 9.6, 19.2, 38.4, 57.6, 76.8 or 115.2 kbps</li></ul> <b>S2 MSTP:</b> Electrically isolated EIA-485 port with <b>End of Net</b> switch for connecting one of the following <ul style="list-style-type: none"><li>• BACnet MS/TP network at 9.6, 19.2, 38.4, 57.6, , 76.8, or 115.2 kbps</li><li>• Modbus RTU at 9.6, 19.2, 38.4, 57.6, 76.8 or 115.2 kbps</li></ul> <b>Service:</b> 10/100 Base T Ethernet port for system start-up and troubleshooting; <b>IO Bus port:</b> Provides communication for wired TruVu MPC I/O expanders that are powered by external power supplies; <b>IO Bus edge connector:</b> 6-pin connector that provides communication and power to a directly-connected TruVu MPC I/O expander
<b>Third Party Integration</b>	Supports up to 1,500 third-party BACnet points and 200 Modbus points (memory dependent).
<b>Physical</b>	Fire-retardant plastic ABS, UL94-5VA
<b>I/O Expanders</b>	Supports up to 9 TruVu MPC I/O expanders and/or 6 MPC Open XPIO expanders (max 9 total)
<b>Protection</b>	Two fast acting, 5mm x 20mm glass fuses: • A 2A fuse for the TV-MPCXP's power • A 4A fuse for the I/O bus edge connector. The power and network ports comply with the EMC requirements EN50491-5-2.
<b>Compliance</b>	<b>United States of America:</b> FCC compliant to Title CFR47, Chapter 1, Subchapter A, Part 15, Subpart B, Class A; UL listed to UL916, PAZX, Energy Management Equipment <b>Canada:</b> Industry Canada Compliant, ICES-003, Class A; cUL listed UL 916, PAZX and Energy Management Equipment; <b>Europe:</b> EN50491-5-2:2009; Part 5-2: EMC requirements for HBES/BACS used in residential, commercial and light industry environment EN50491-3:2009, Part 3: Electrical safety requirements for Home and Building Electronic Systems (HBES) and Building Automation and Control Systems (BACS) Low Voltage Directive: 2014/35/EU RoHS Compliant: 2011/65/EU; <b>Australia and New Zealand:</b> C-Tick Mark, AS/NZS 61000-6-3
<b>Real Time Clock</b>	Real-time clock keeps track of time in the event of a power failure for up to 3 days
<b>Environmental Operating Range</b>	<b>Operating:</b> -40 to 158°F (-40 to 70°C) 10 to 95% RH, non-condensing
<b>Power Requirements</b>	24VAC ± 10%, 50-60Hz; 50 VA power consumption; 26VDC ± 10% 15W; Single Class 2 source only, 100 VA or less

### Dimensions

#### Overall

**A:** 7.1 in. (18.03 cm)

**B:** 6.95 in. (17.65 cm)


#### Mounting

**C:** 6.45 in. (16.38 cm)

**D:** 4.1 in. (10.4 cm)

**Depth:** 2.09 in. (5.31 cm)

**Weight:** 1 lb (0.45 kg)

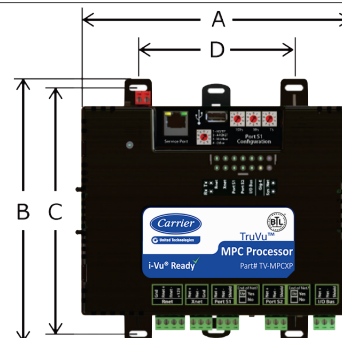

For more information, contact your local Carrier Controls Expert.

Controls Expert Locator:  
[www.carrier.com/controls-experts](http://www.carrier.com/controls-experts)