




555

FlexFix[®] UL 181B-FX Listed Film Tape

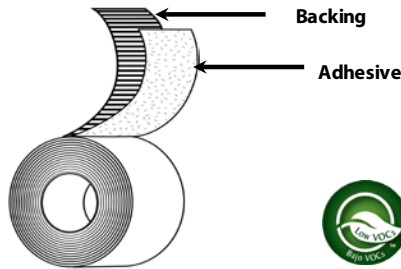

- Backing:** Printed OPP Film
- Adhesive:** Acrylic
- Liner:** N/A
- Colors:** Metallic & Black
- Specifications:** UL 181B-FX Listed
- Standard Sizes:** 48mm x 110M, 72mm x 110M

Applications

- Tough, contractor grade closure system for UL Listed flexible, non-metallic air duct
- Sealing reflective and bubble insulation
- Suitable for metal to metal connections in HVAC and refrigeration applications
- Dryer vent and bath fan duct sealing

Features

Benefits

<ul style="list-style-type: none"> • OPP Backing 	<ul style="list-style-type: none"> • Tough and durable • Hand tearable for ease of use • High visibility print (red on metallic, white on black) for easy inspection
<ul style="list-style-type: none"> • Acrylic Adhesive 	<ul style="list-style-type: none"> • Solvent-free, low odor • Aggressive, high tack bond • Mold and moisture resistant
<ul style="list-style-type: none"> • UL 181B-FX Listed 	<ul style="list-style-type: none"> • Meets code requirements and can contribute toward requirements for EA Credit 1 (Optimize Energy Performance) under LEED[®]
<ul style="list-style-type: none"> • Low VOC Content 	<ul style="list-style-type: none"> • Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED[®]

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	3.1 mils	0.079 mm	ASTM D-1000
Adhesion to Steel	45 oz/in	4.92 N/cm	PSTC-101
Adhesion to Backing	35 oz/in	3.83 N/cm	PSTC-101
Tensile Strength	34 lb/in	59.54 N/cm	ASTM D-1000
Operating Temperature	-40 to 212 °F	-40 to 100 °C	
VOC Content	0 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.